

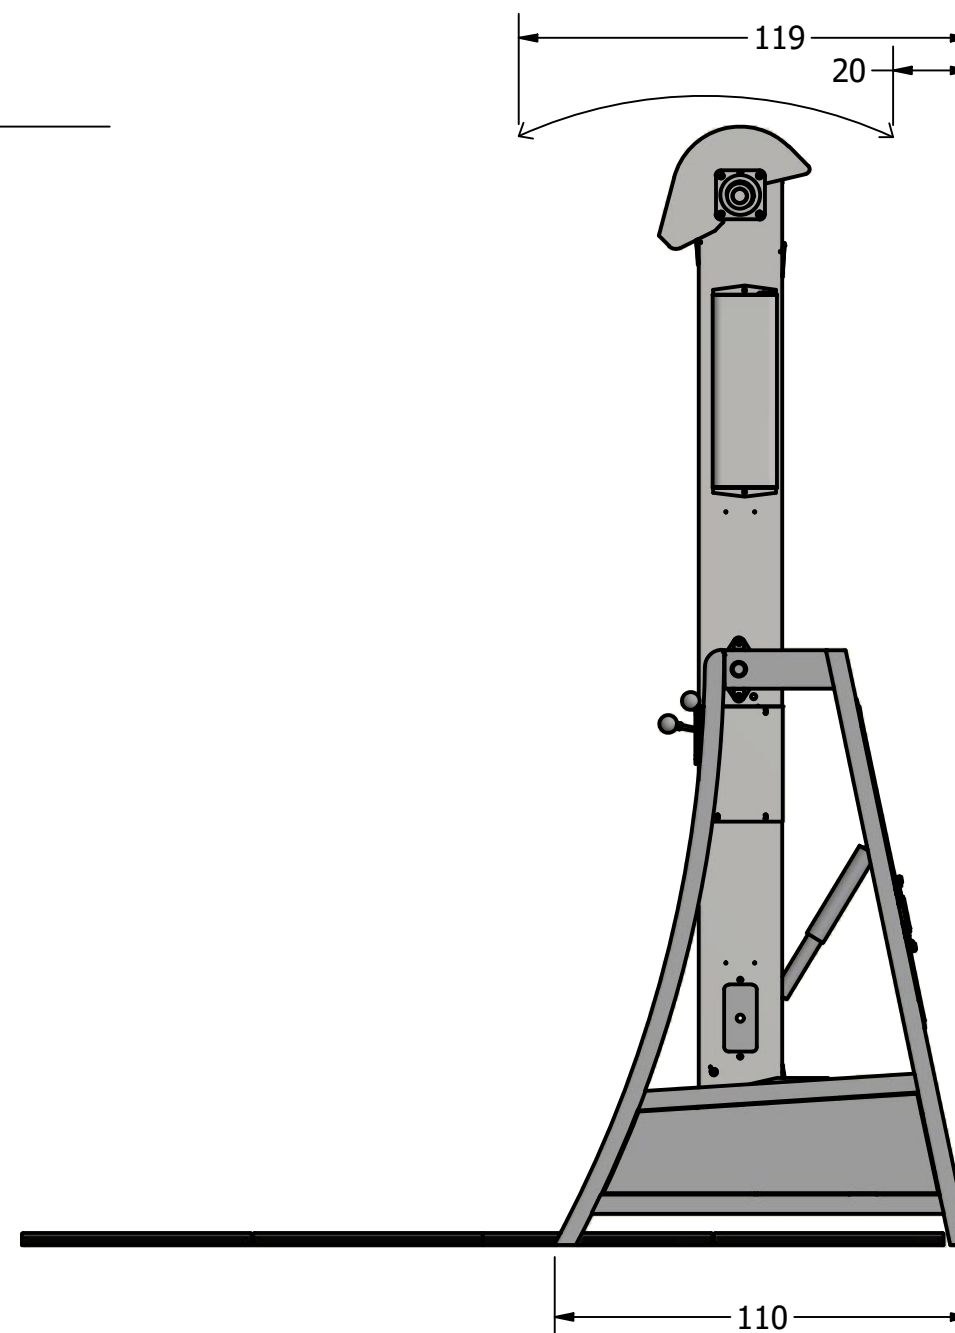
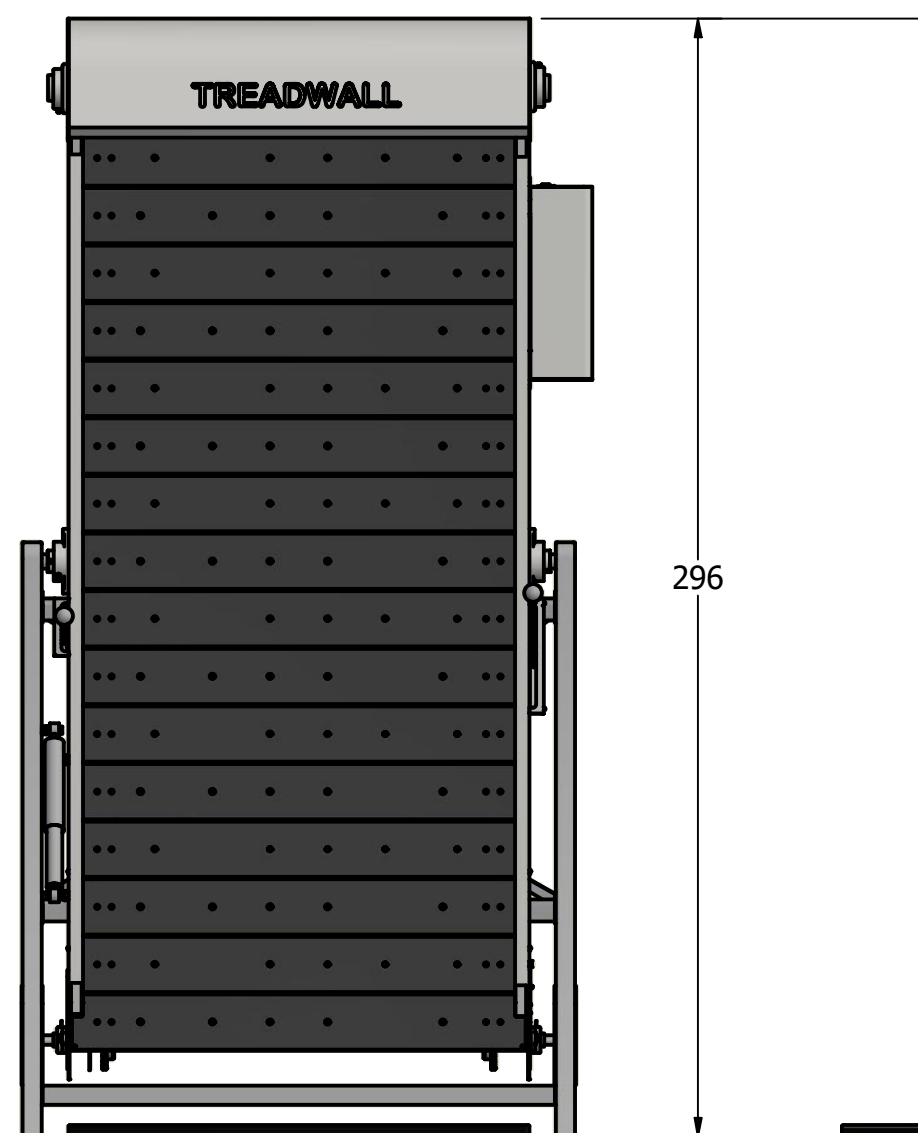


Treadwall® S4/10 Rotating Walls

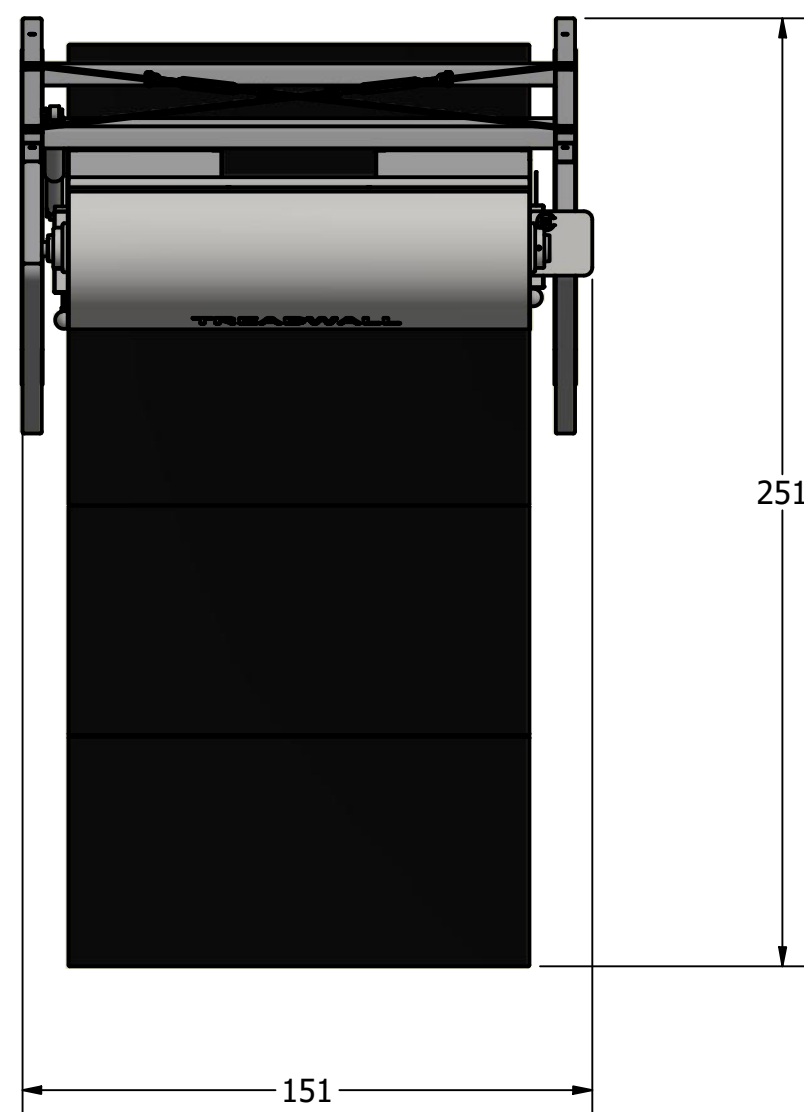

The Treadwall S4/10 has one of the smallest footprints we produce, designed for smaller spaces and lower ceilings. The compact Treadwall S4/10 features a 1.016 meter wide by 2.032 meter tall climbing surface and ample angle range. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop^(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The S4/10 is designed to fit under a 3 meter ceiling. See the S4/11 and S4/12 units for higher ceilings.

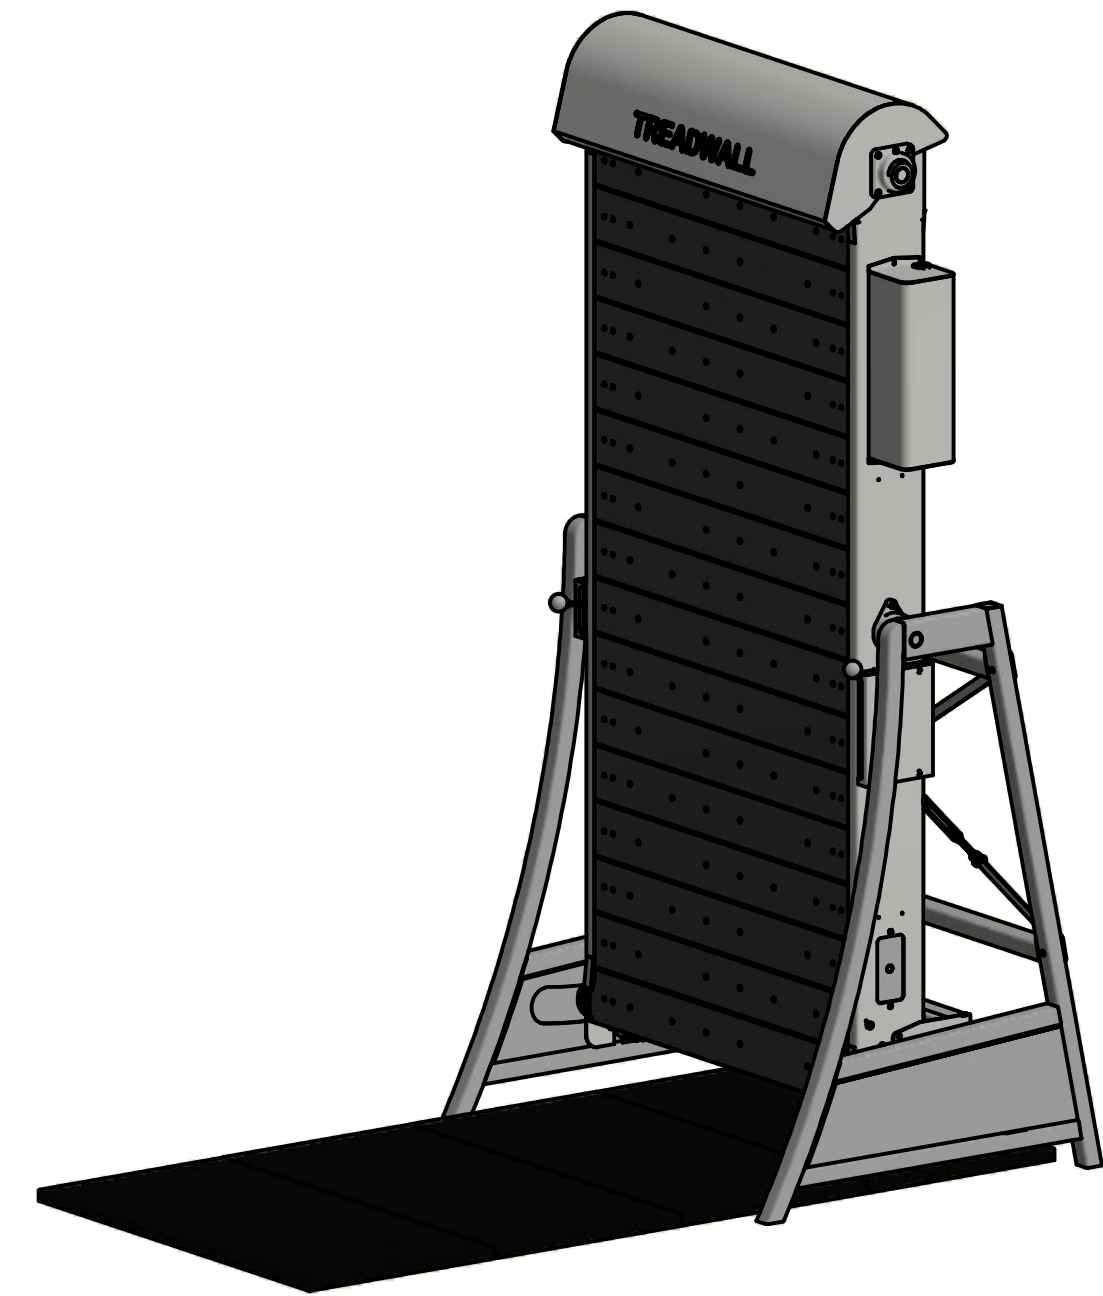

SPECIFICATIONS:

Weight: 385.9 kilograms.

Construction: Steel framework with custom-machined wood panels.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 1.016 m.

Total length of climbing surface: 4.572 m.

Number of possible hold placements: 144.

Angle range: positive 10 degrees to negative 15 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Electronic Display: Measures distance (feet or meters), time and calories.

Time and distance goals can be pre-set.

Color - frame: Anthracite Gray is standard. Custom colors available.

Color - panels: Natural Wood

Holds: Set of 36 custom training holds in 3 color groups, with optional 13 ladder Line^(tm) holds.


Maximum hold size: 6.35 cm high by 15.24 cm wide.

Floor Mat: 2.032 m x 1.016 m custom mat, 3.175 cm dual foam, black 14 oz. vinyl cover.




Warranty: Six years parts, one year electronics and labor.

See full warranty for details.

Treadwall® S4/11 Rotating Walls

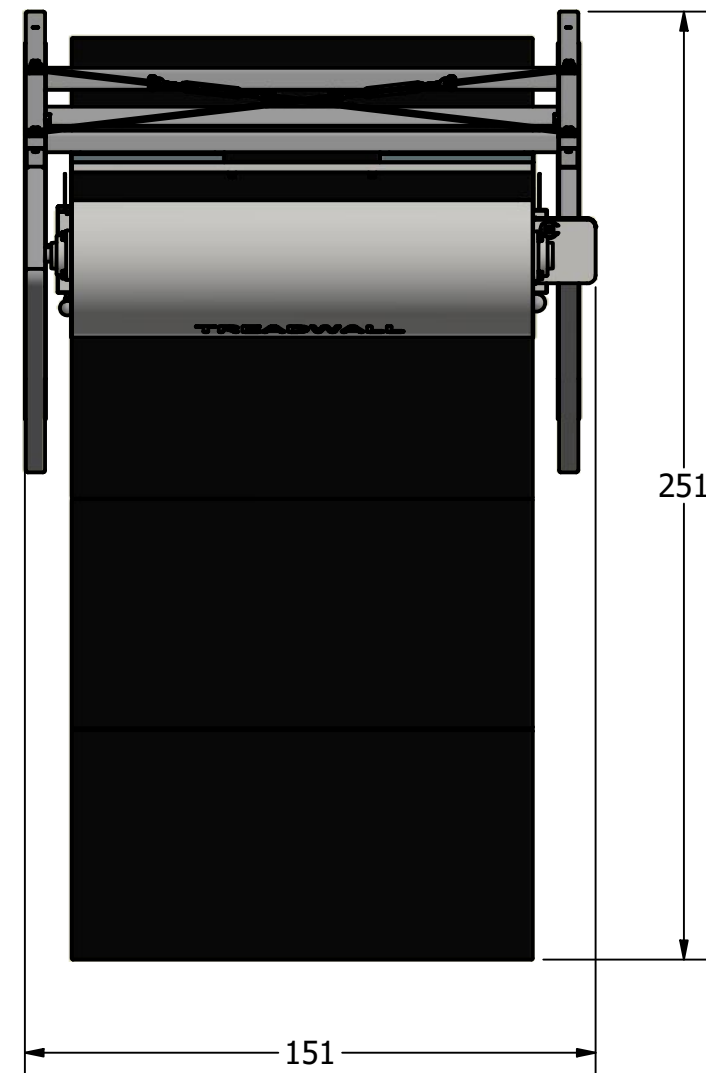

The Treadwall S4/11 is designed with smaller spaces in mind, combining a small footprint with a 4 foot wide by 9 foot high climbing surface, and ample angle range. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop^(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The S4/11 is designed to fit under an 11 foot ceiling. See the S4/10 for lower ceilings and S4/12 units for higher ceilings.

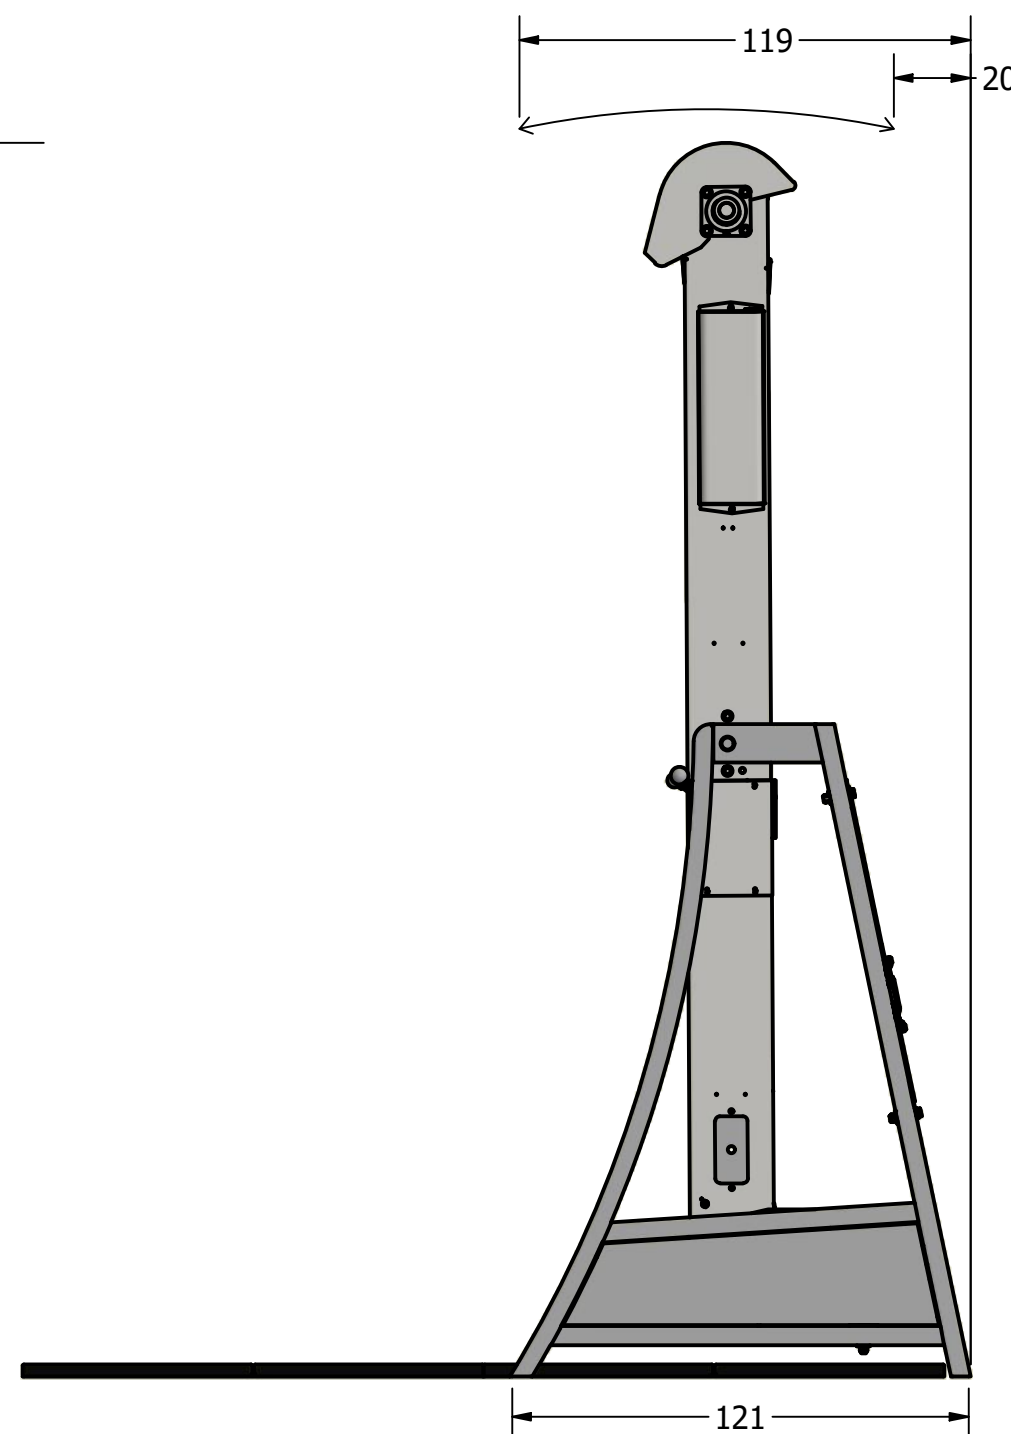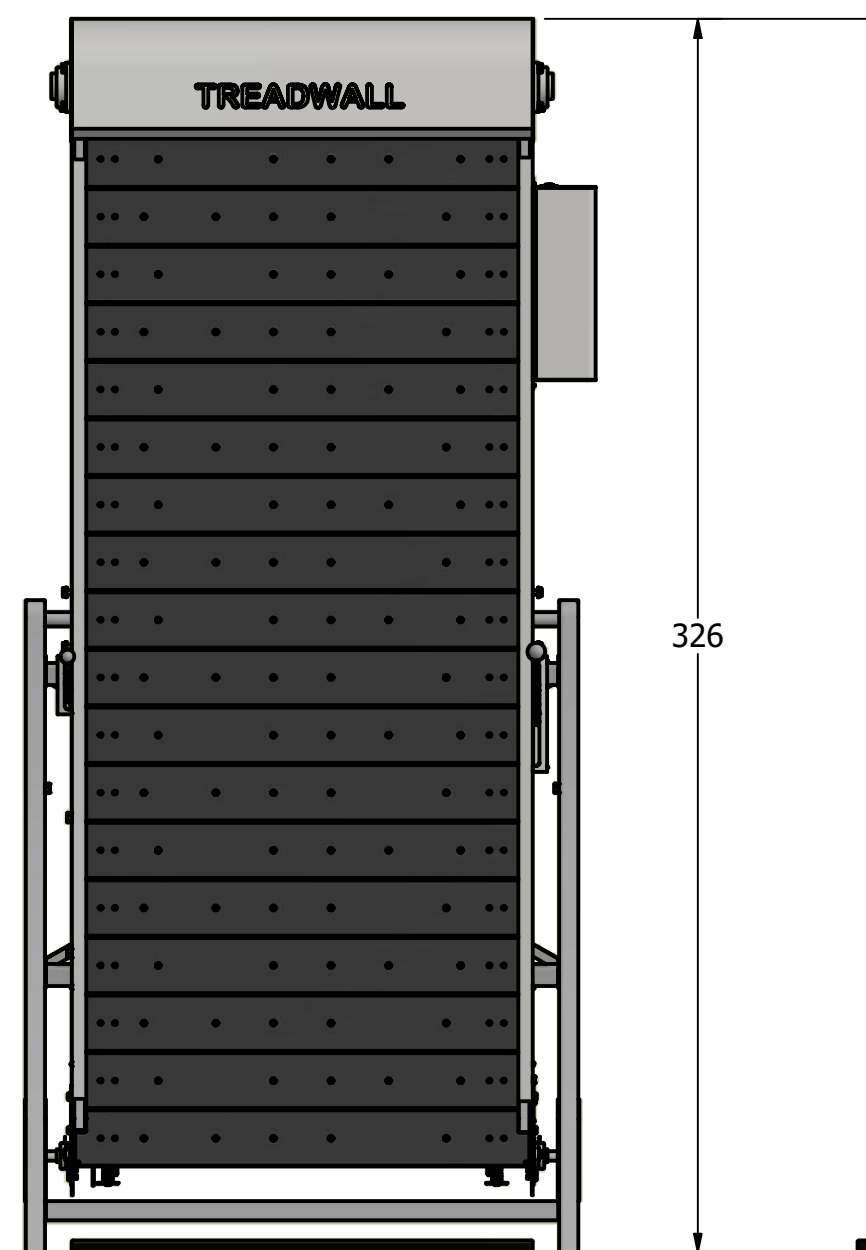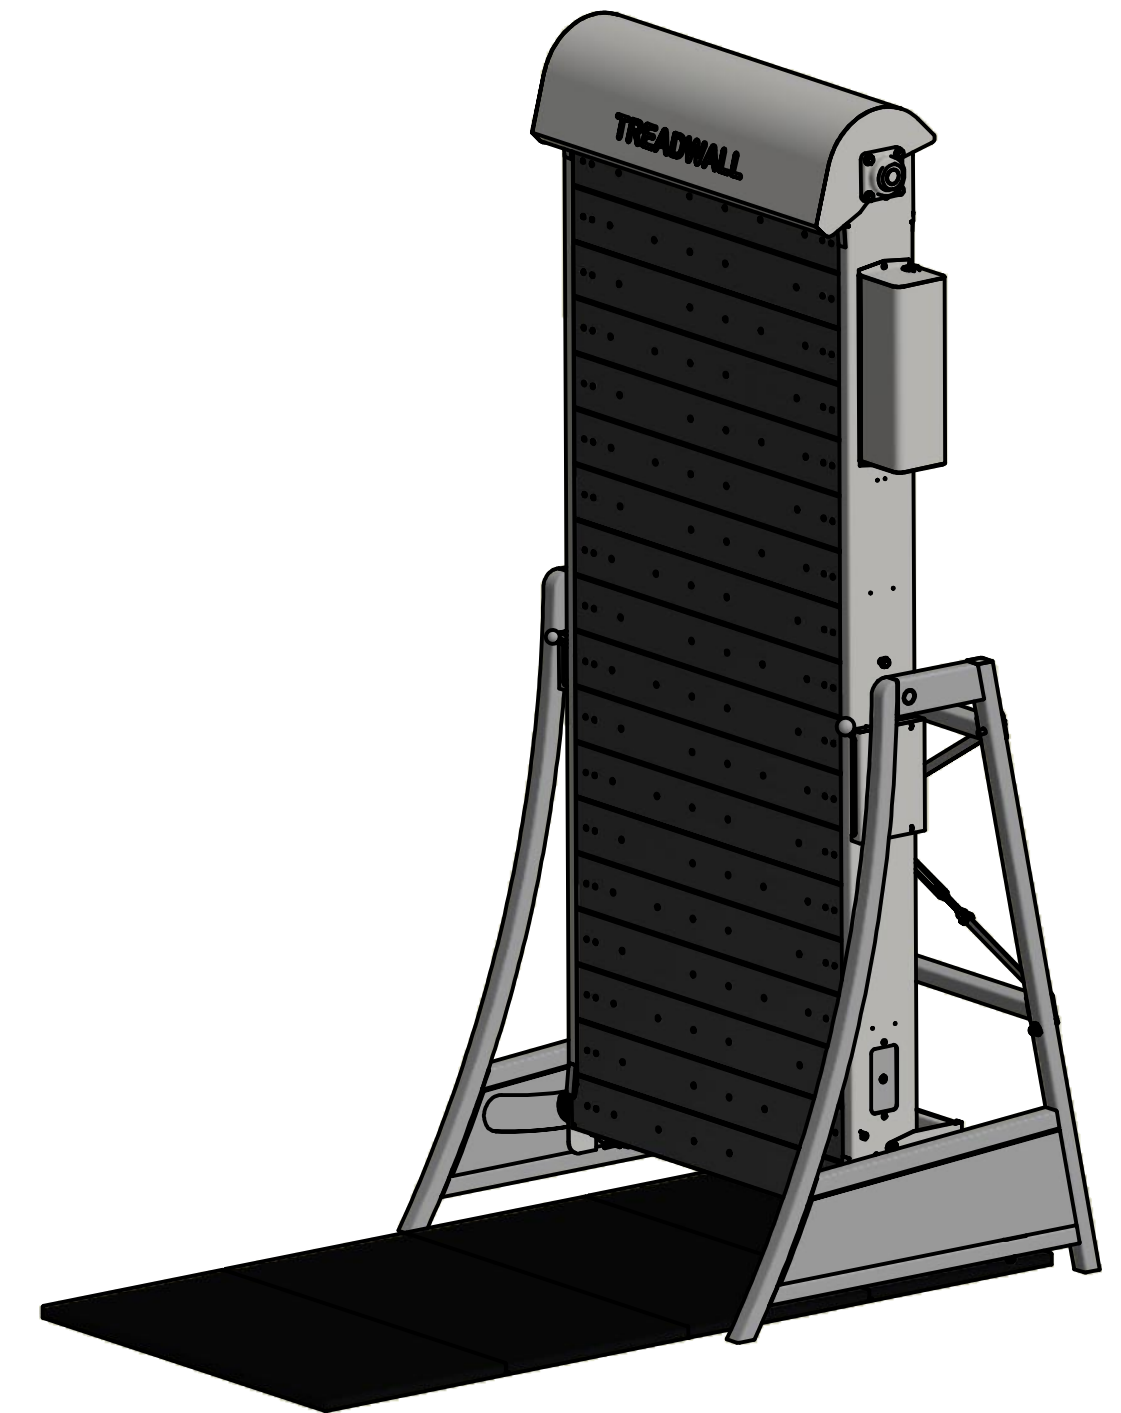

SPECIFICATIONS:

Weight: 408.6 kg.

Construction: Steel framework with custom-machined wood panels.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 1.016 m.

Total length of climbing surface: 5.08 m.

Number of possible hold placements: 160.

Angle range: positive 10 degrees to negative 15 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Electronic Display: Measures distance (feet or meters), time and calories.

Time and distance goals can be pre-set.

Color - frame: Anthracite Gray is standard. Custom colors available.

Color - panels: Natural Wood

Holds: Set of 36 custom training holds in 3 color groups, with optional 13 ladder Line^(tm) holds.



Maximum hold size: 6.35 cm high by 15.24 cm wide.

Floor Mat: 2.032 m x 1.016 m custom mat, 3.175 cm dual foam, black 14 oz. vinyl cover.



Warranty: Six years parts, one year electronics and labor.

See full warranty for details.

Treadwall® S4/12 Rotating Walls

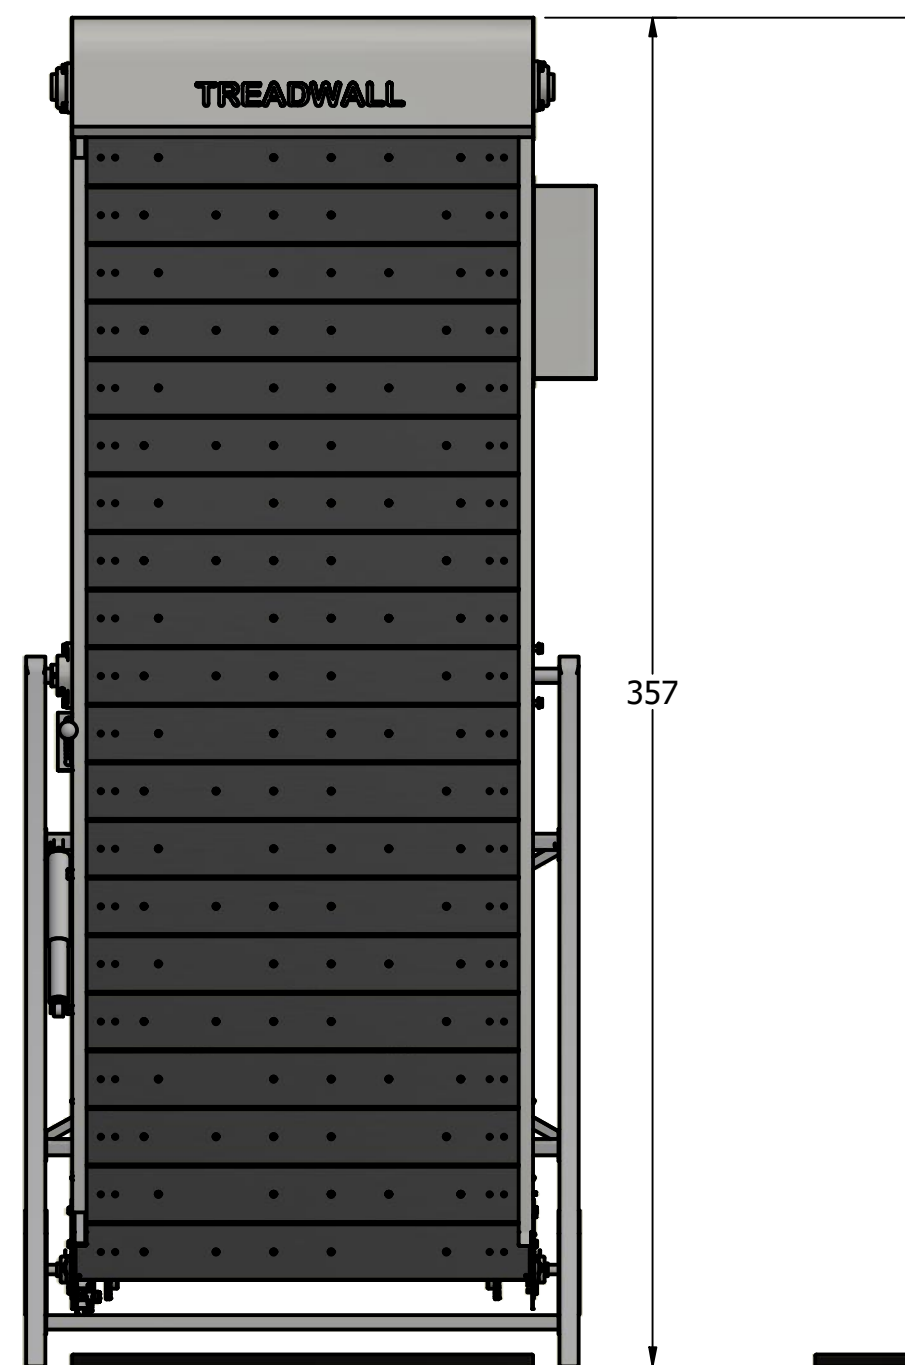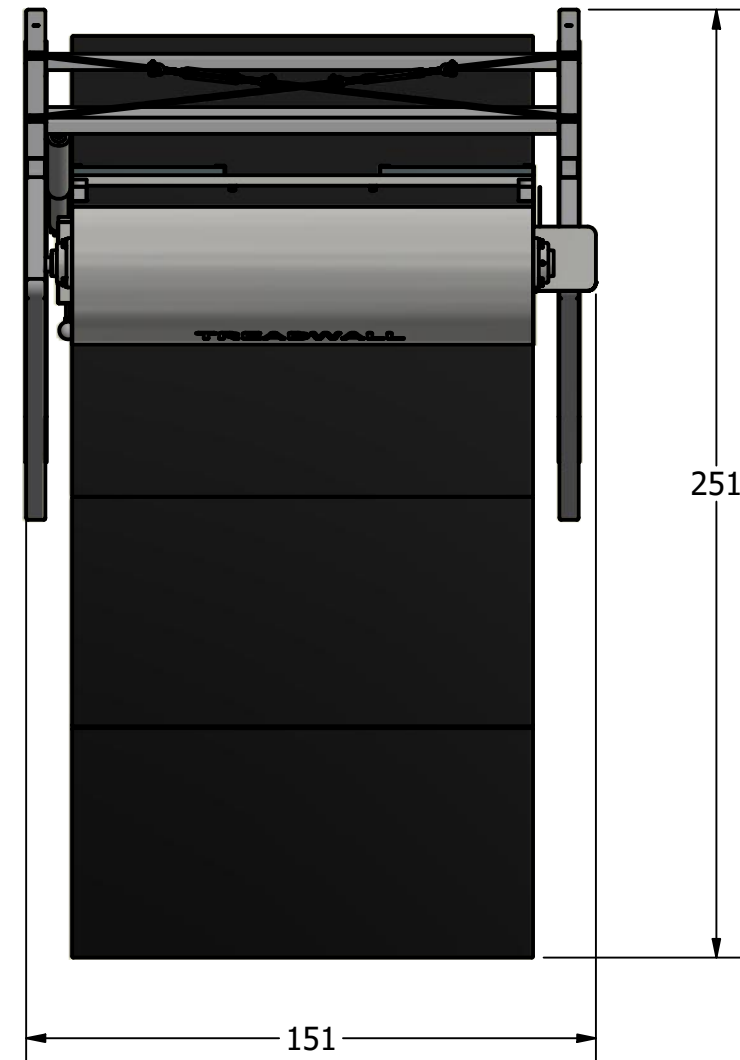

The Treadwall S4/12 has one of the smallest footprints we produce, combined with the tallest climbing surface we offer. At this height, the Treadwall S4/12 features a 1.016 meter wide by 3 meter tall climbing surface. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop_(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The S4/12 is designed to fit under a 3.6 meter ceiling. See the S4/10 and S4/11 units for lower ceilings.

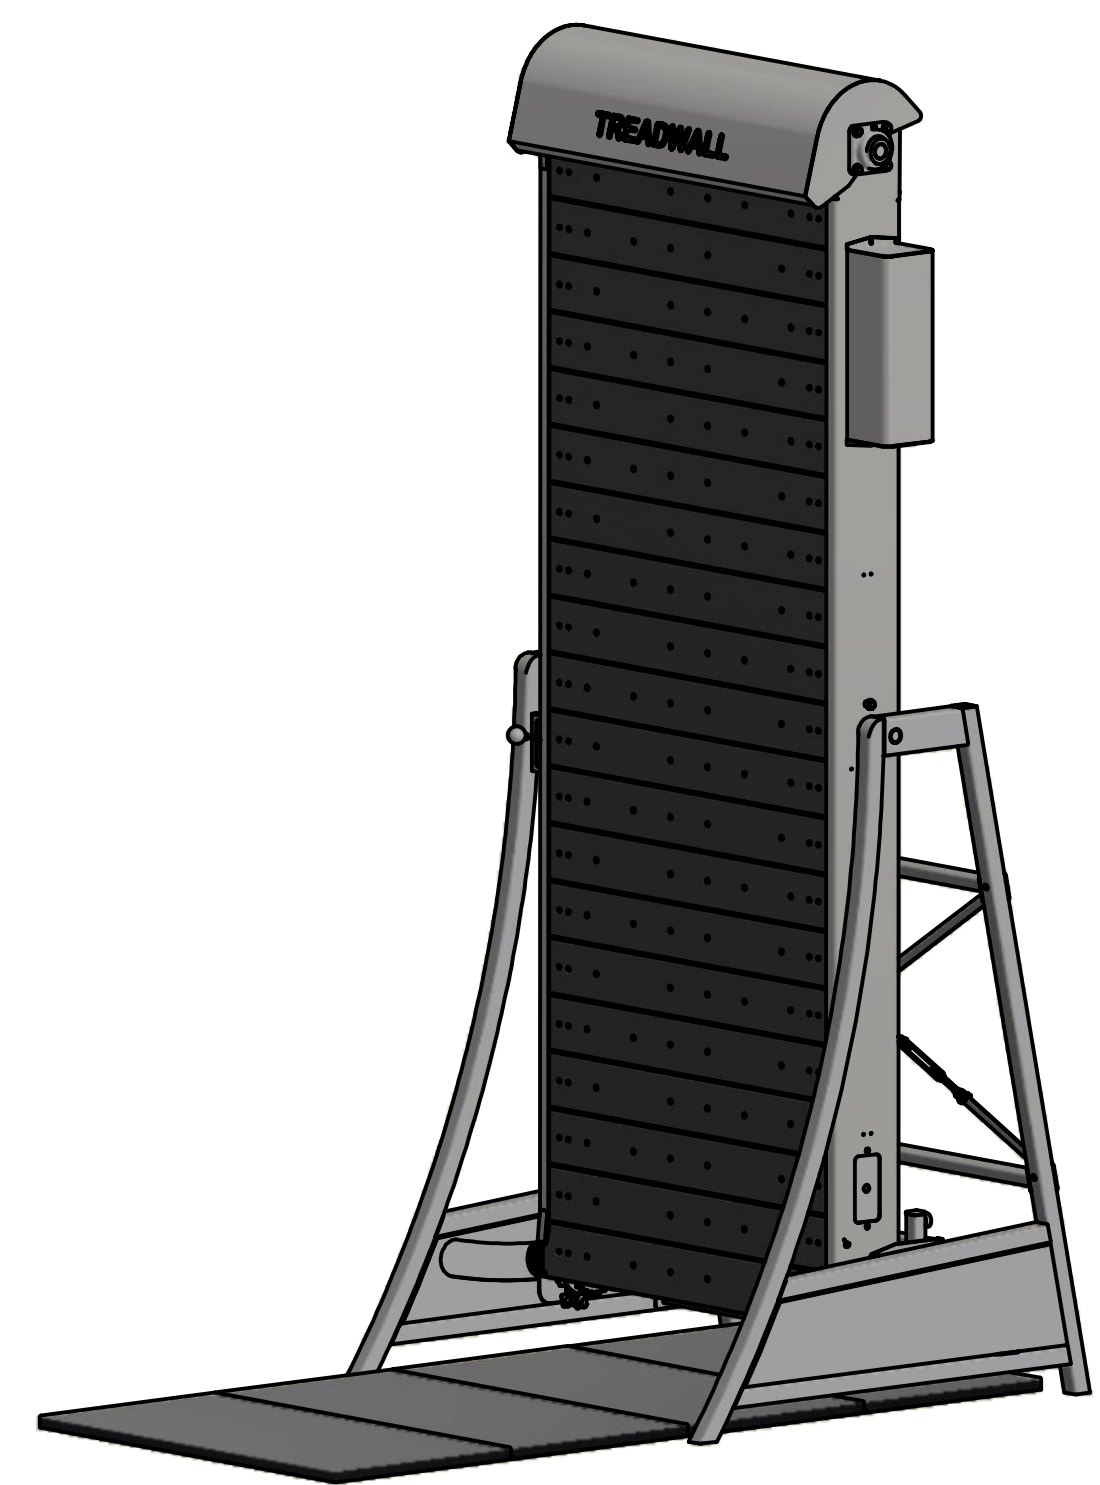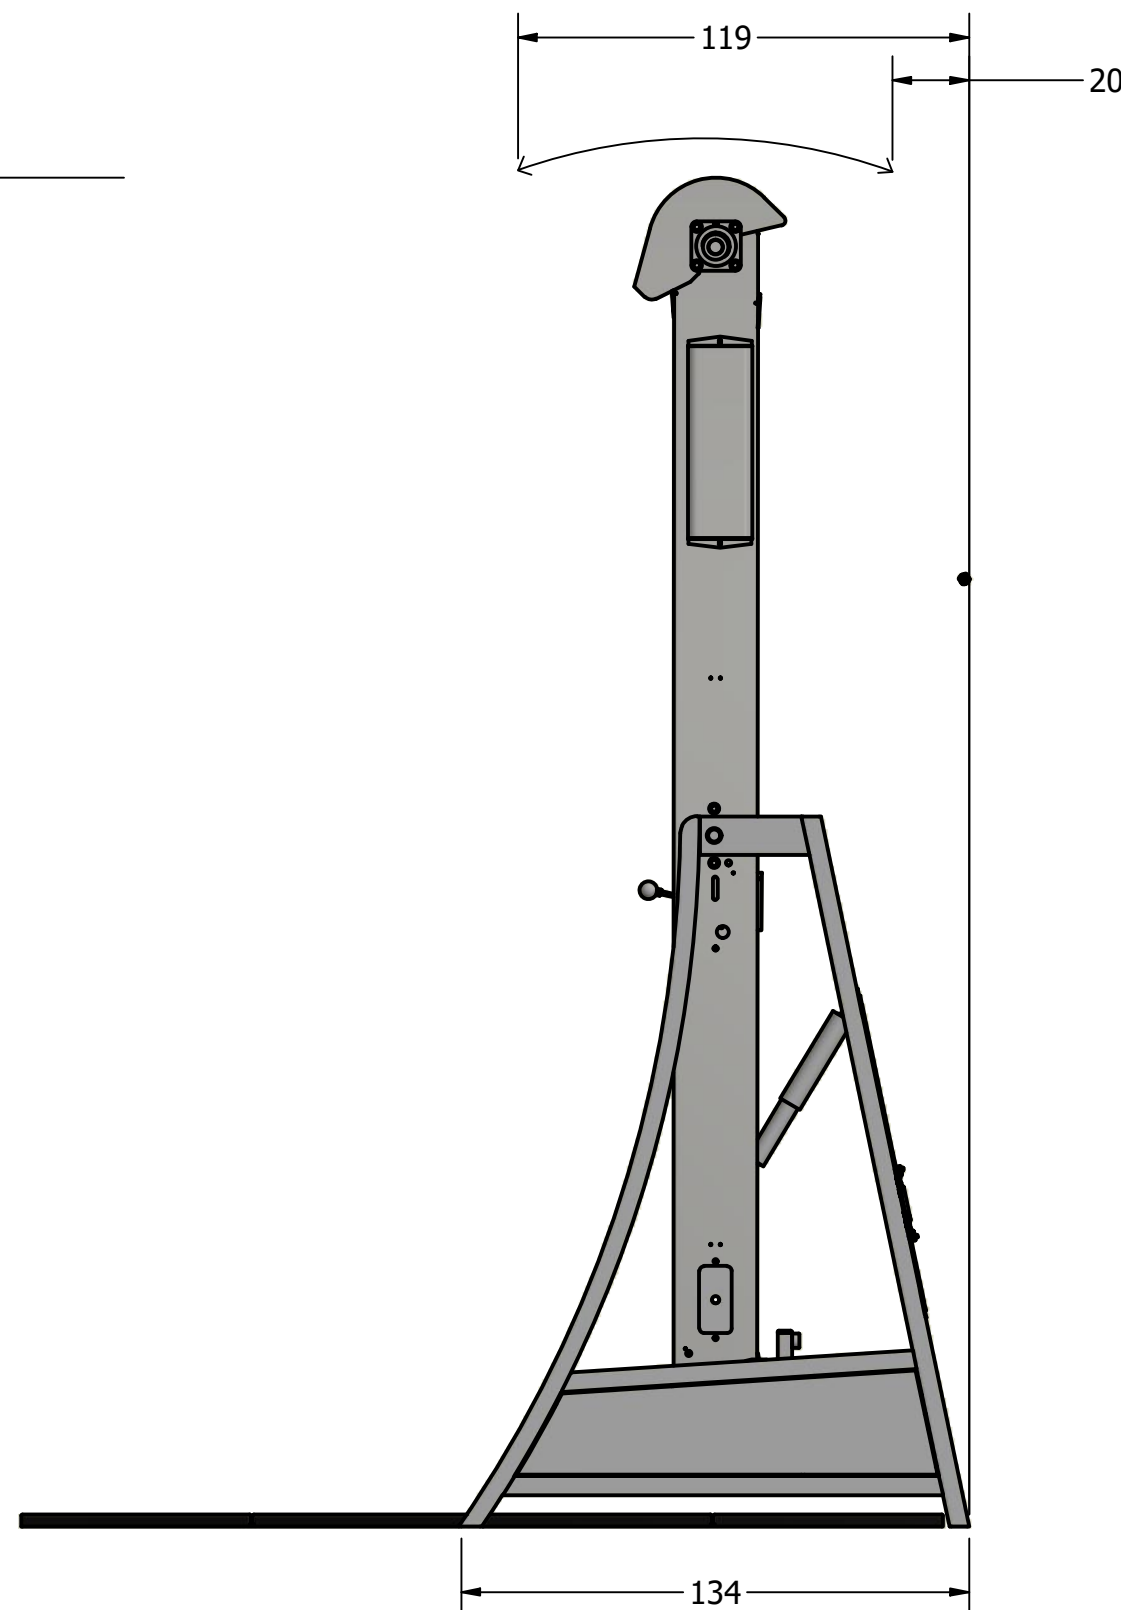

SPECIFICATIONS:

Weight: 419.95 kg

Construction: Steel framework with custom-machined wood panels.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 1.016 m.

Total length of climbing surface: 5.588 m.

Number of possible hold placements: 176.

Angle range: positive 10 degrees to negative 15 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Electronic Display: Measures distance (feet or meters), time and calories.

Time and distance goals can be pre-set.

Color - frame: Anthracite Gray is standard. Custom colors available.

Color - panels: Natural Wood

Holds: Set of 36 custom training holds in 3 color groups, with optional 13 ladder Line_(tm) holds.

Maximum hold size: 6.35 cm high by 15.24 cm wide.

Floor Mat: 2.032 m x 1.016 m custom mat, 3.175 cm dual foam, black 14 oz. vinyl cover.

Warranty: Six years parts, one year electronics and labor

See full warranty for details.