

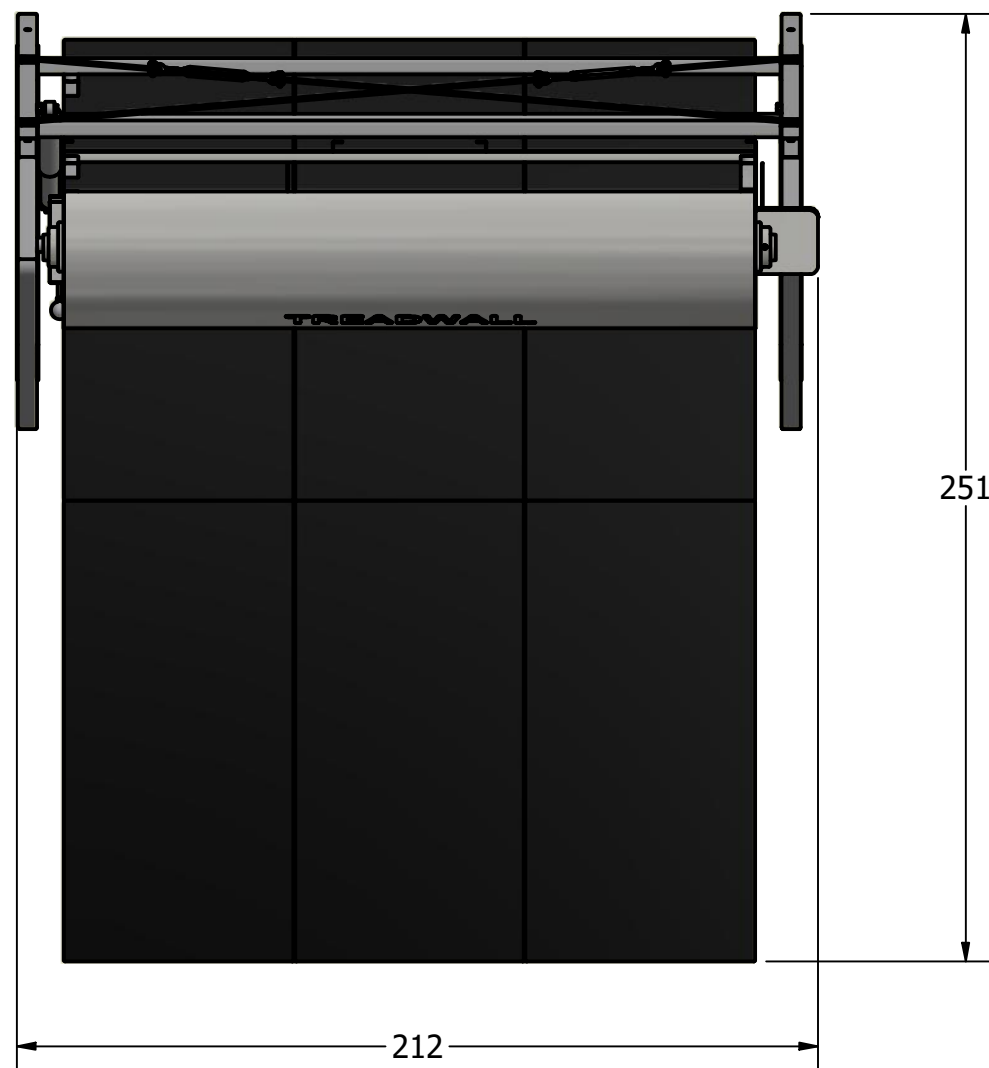
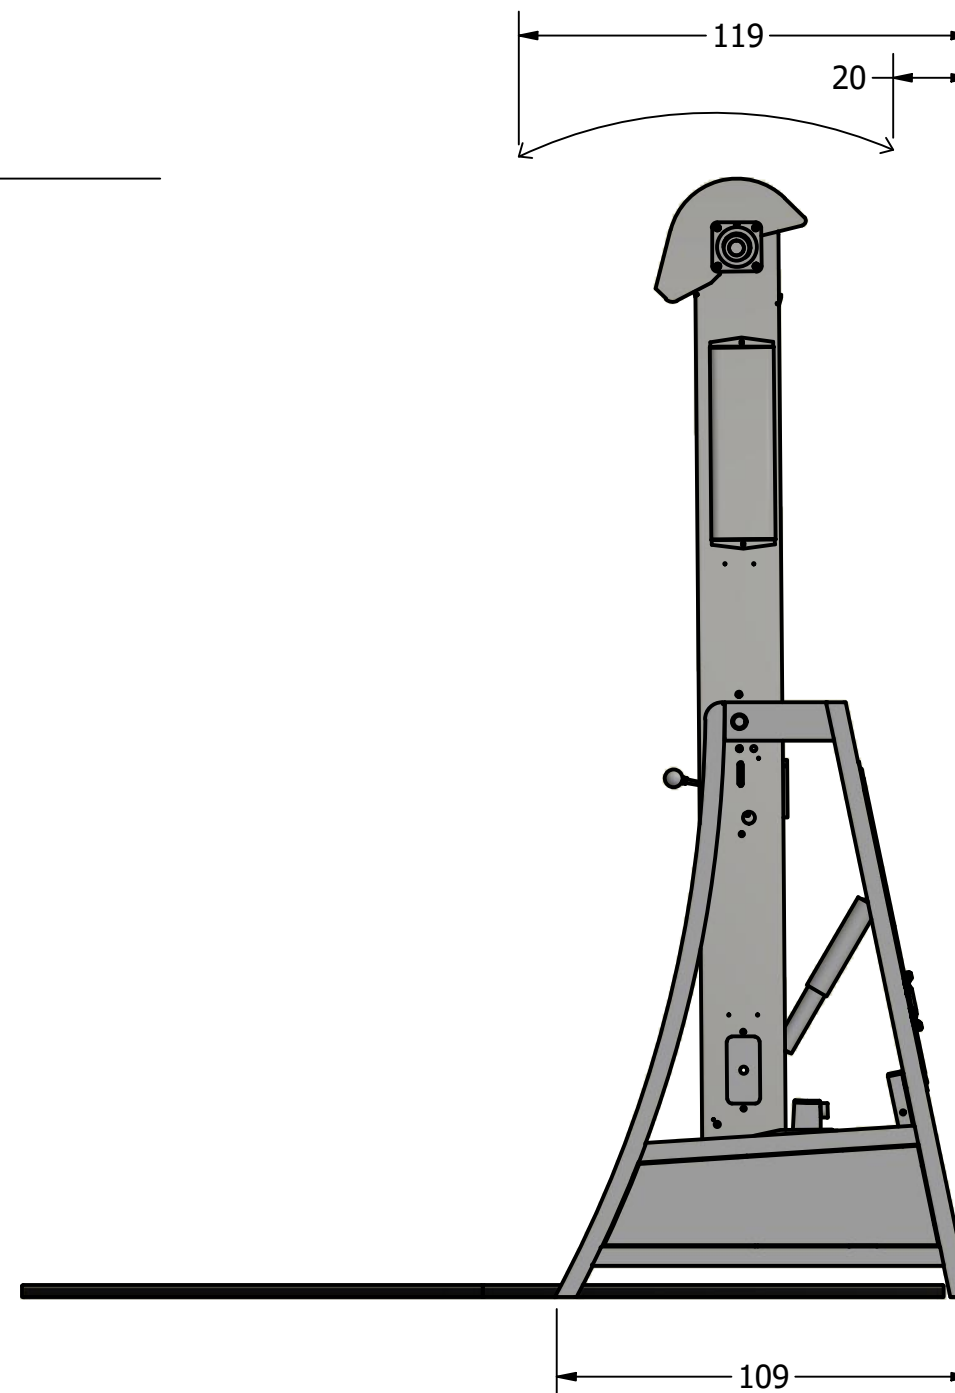


Treadwall® S6/10 Rotating Walls

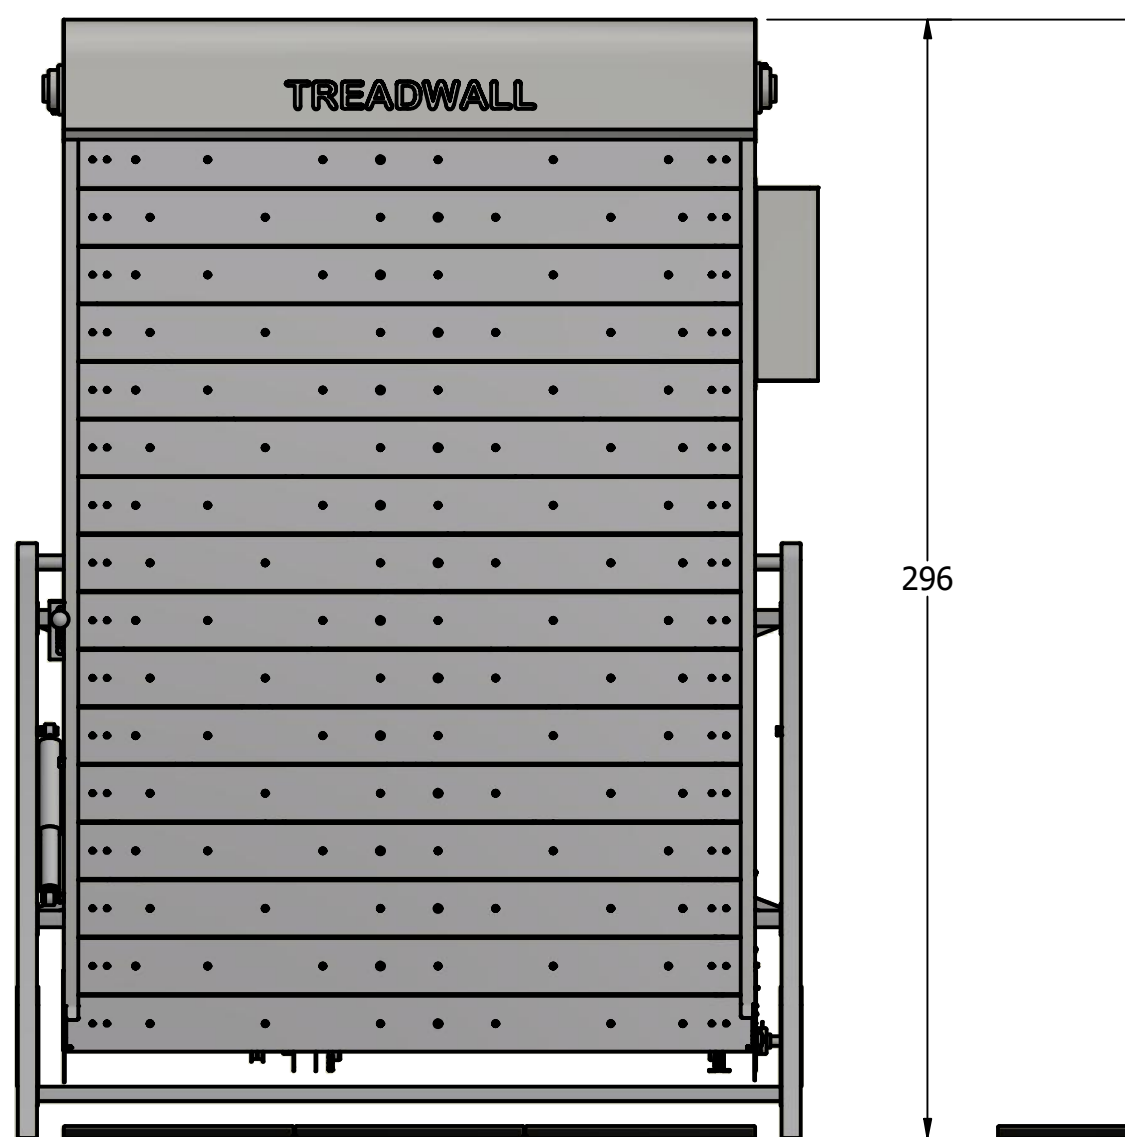

The Treadwall S6/10 combines a wide surface with a lower height designed specifically for fitness and training facilities. It has a generously sized climbing surface - 1.524 meter wide by 2.032 meter high that encourages sideways as well as upward movement. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop^(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The S6/10 is designed to fit under a 3 meter ceiling. See the S6/11 and S6/12 units for higher ceilings.

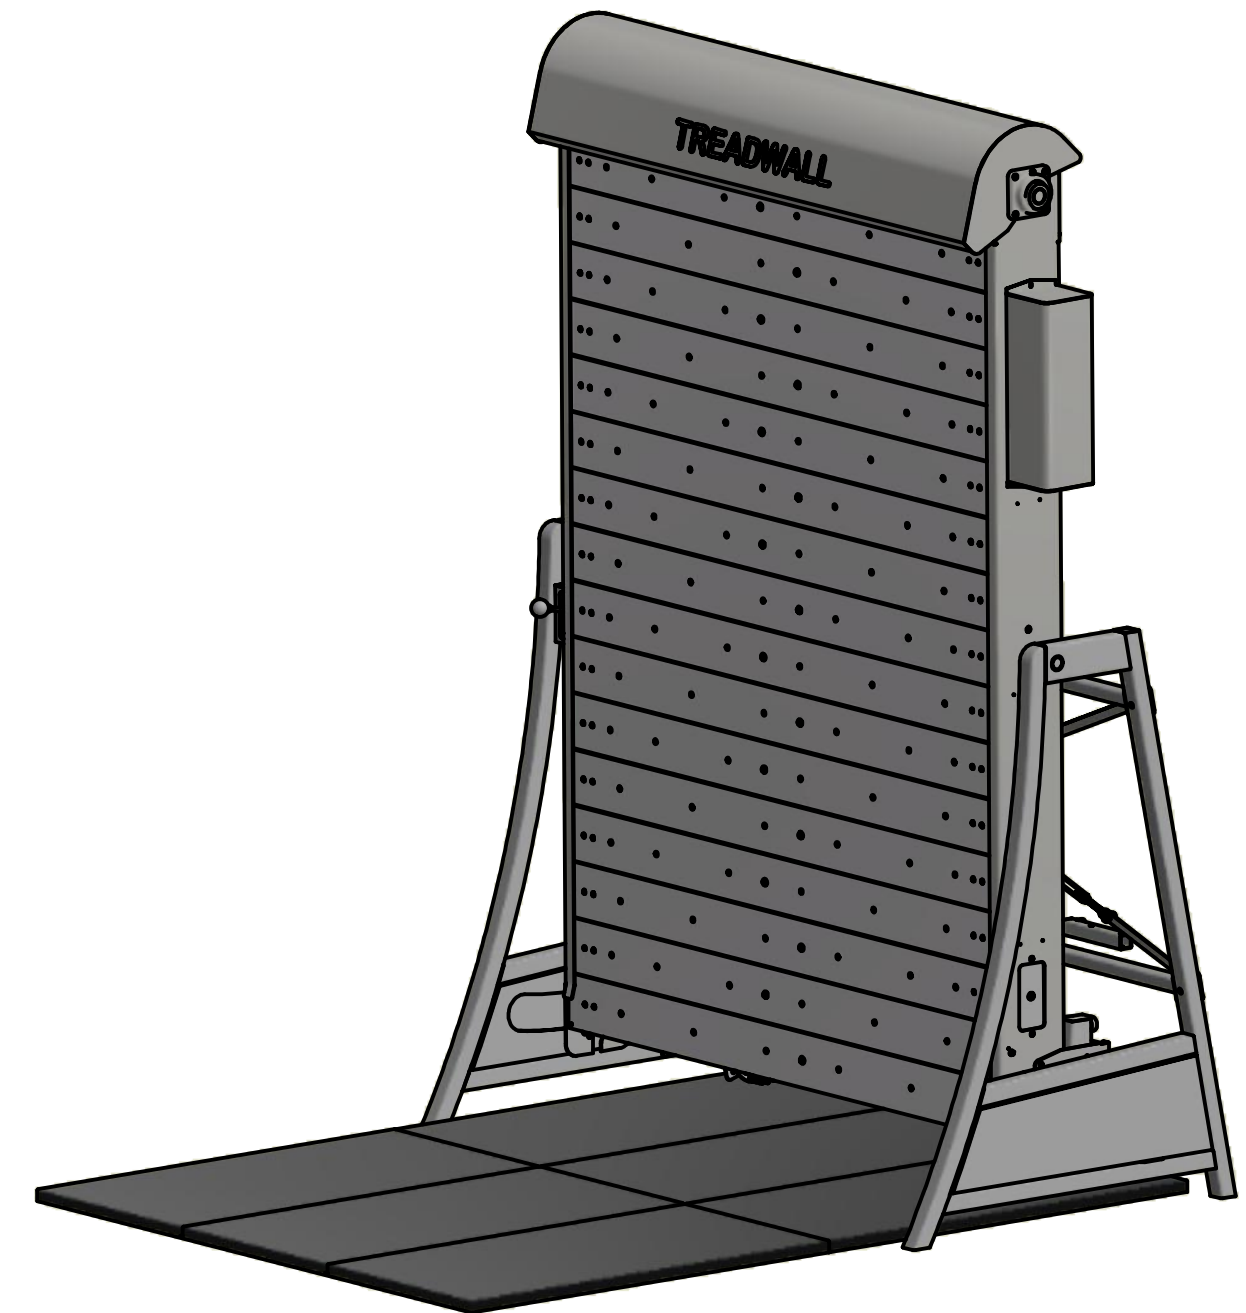

SPECIFICATIONS:

Weight: 454 kg.

Construction: Steel framework with custom-machined wood panels.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 1.524 m.

Total length of climbing surface: 4.572 m.

Number of possible hold placements: 216.

Angle range: positive 10 degrees to negative 15 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Electronic Display: Measures distance (feet or meters), time and calories.

Time and distance goals can be pre-set.

Color - frame: Anthracite Gray is standard. Custom colors available.

Color - panels: Natural Wood

Holds: Set of 45 custom training holds in 3 color groups, with optional 14 ladder Line^(tm) holds.



Maximum hold size: 6.35 cm high by 15.24 cm wide.

Floor Mat: 2.032 m x 1.524 m custom mat, 3.175 cm dual foam, black 14 oz. vinyl cover.



Warranty: Six years parts, one year electronics and labor.

See full warranty for details.

Treadwall® S6/11 Rotating Walls

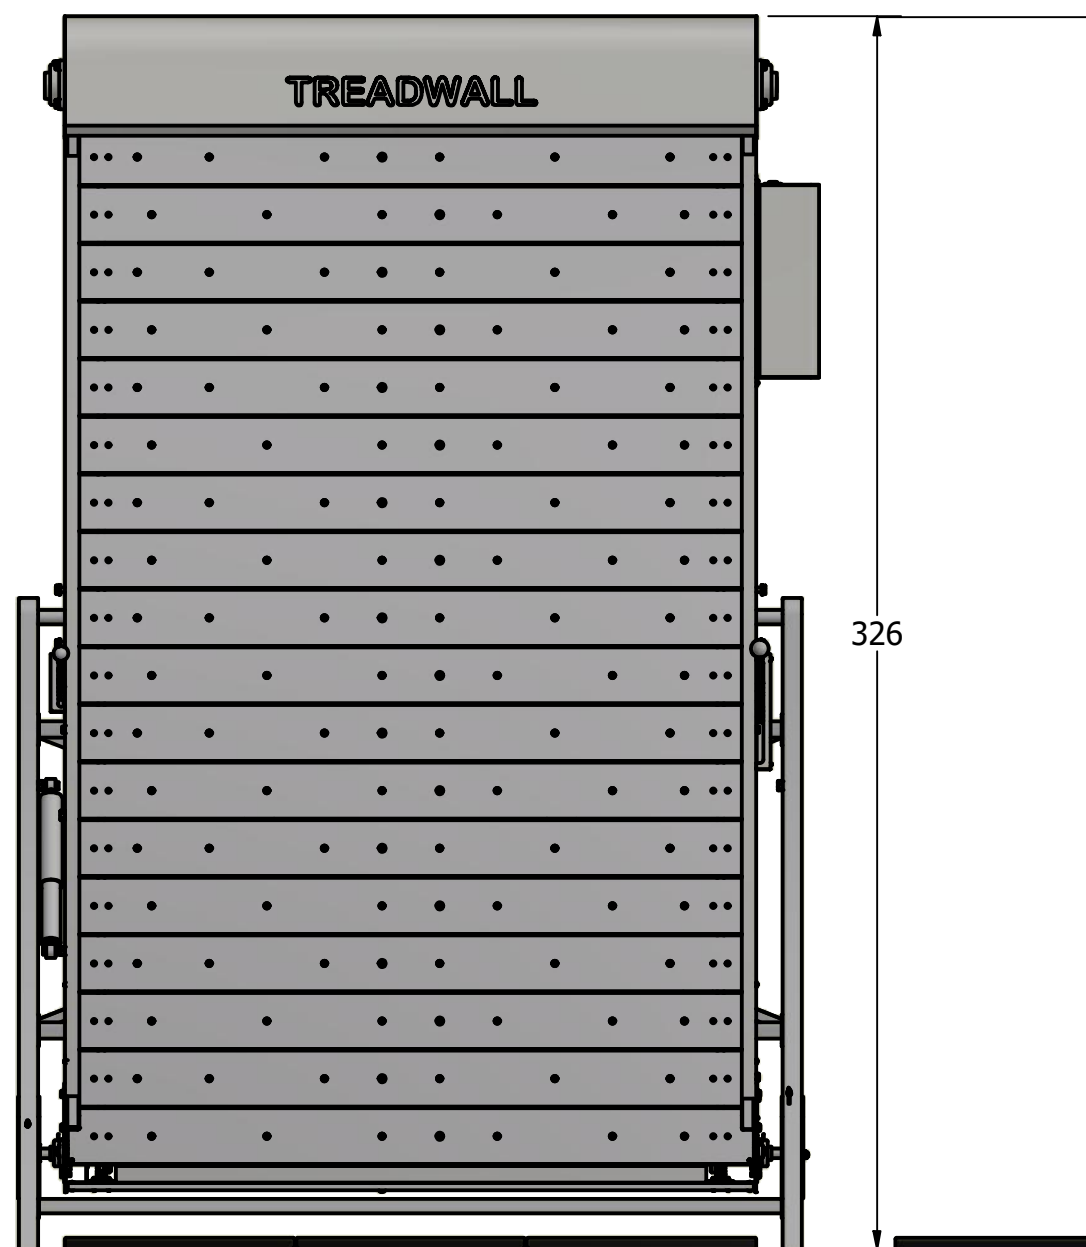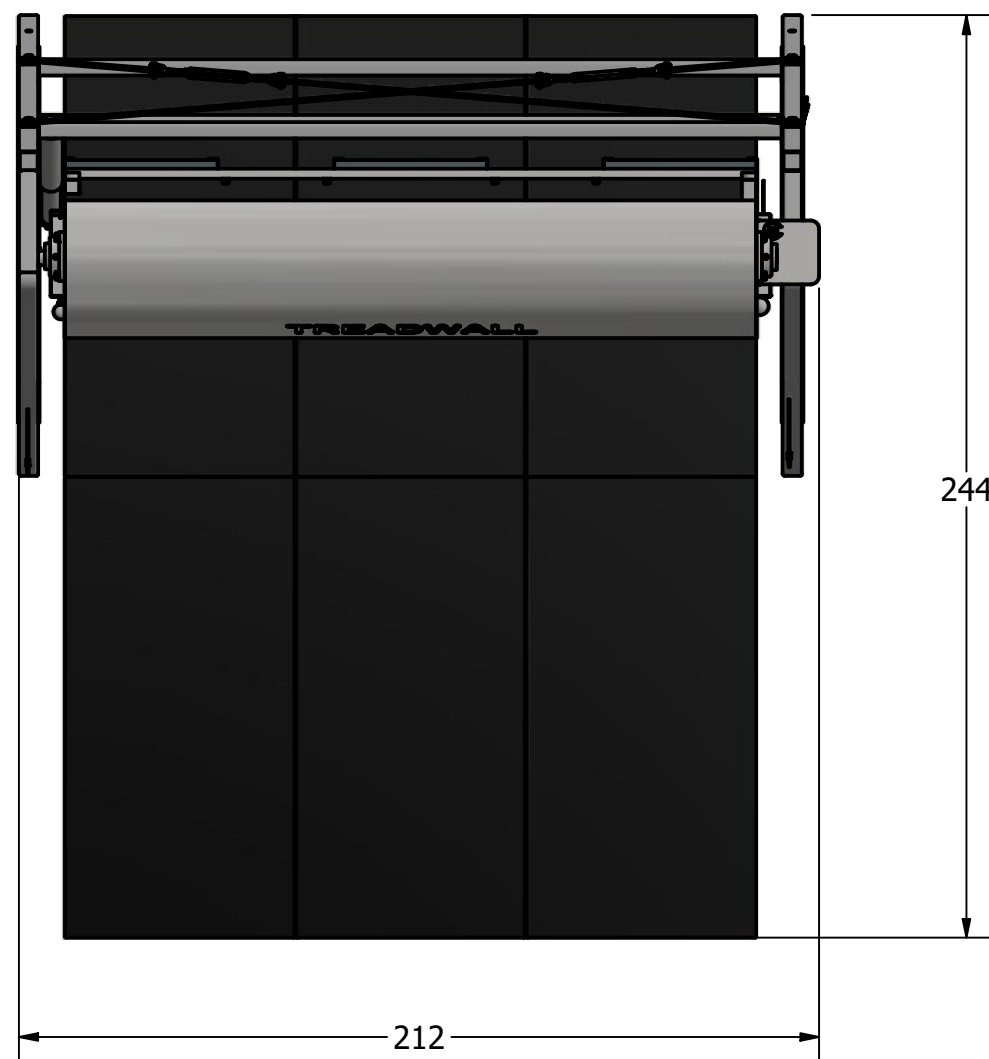

The Treadwall S6/11 is one of our most popular models, combining a wide surface with a smaller footprint designed specifically for fitness and training facilities. It has a generously sized climbing surface - 1.524 meter wide by 2.74 meter high, that encourages sideways as well as upward movement. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop^(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The S6/11 is designed to fit under an 3.3 meter ceiling. See the S6/10 units for lower ceilings and the S6/12 for higher ceilings.

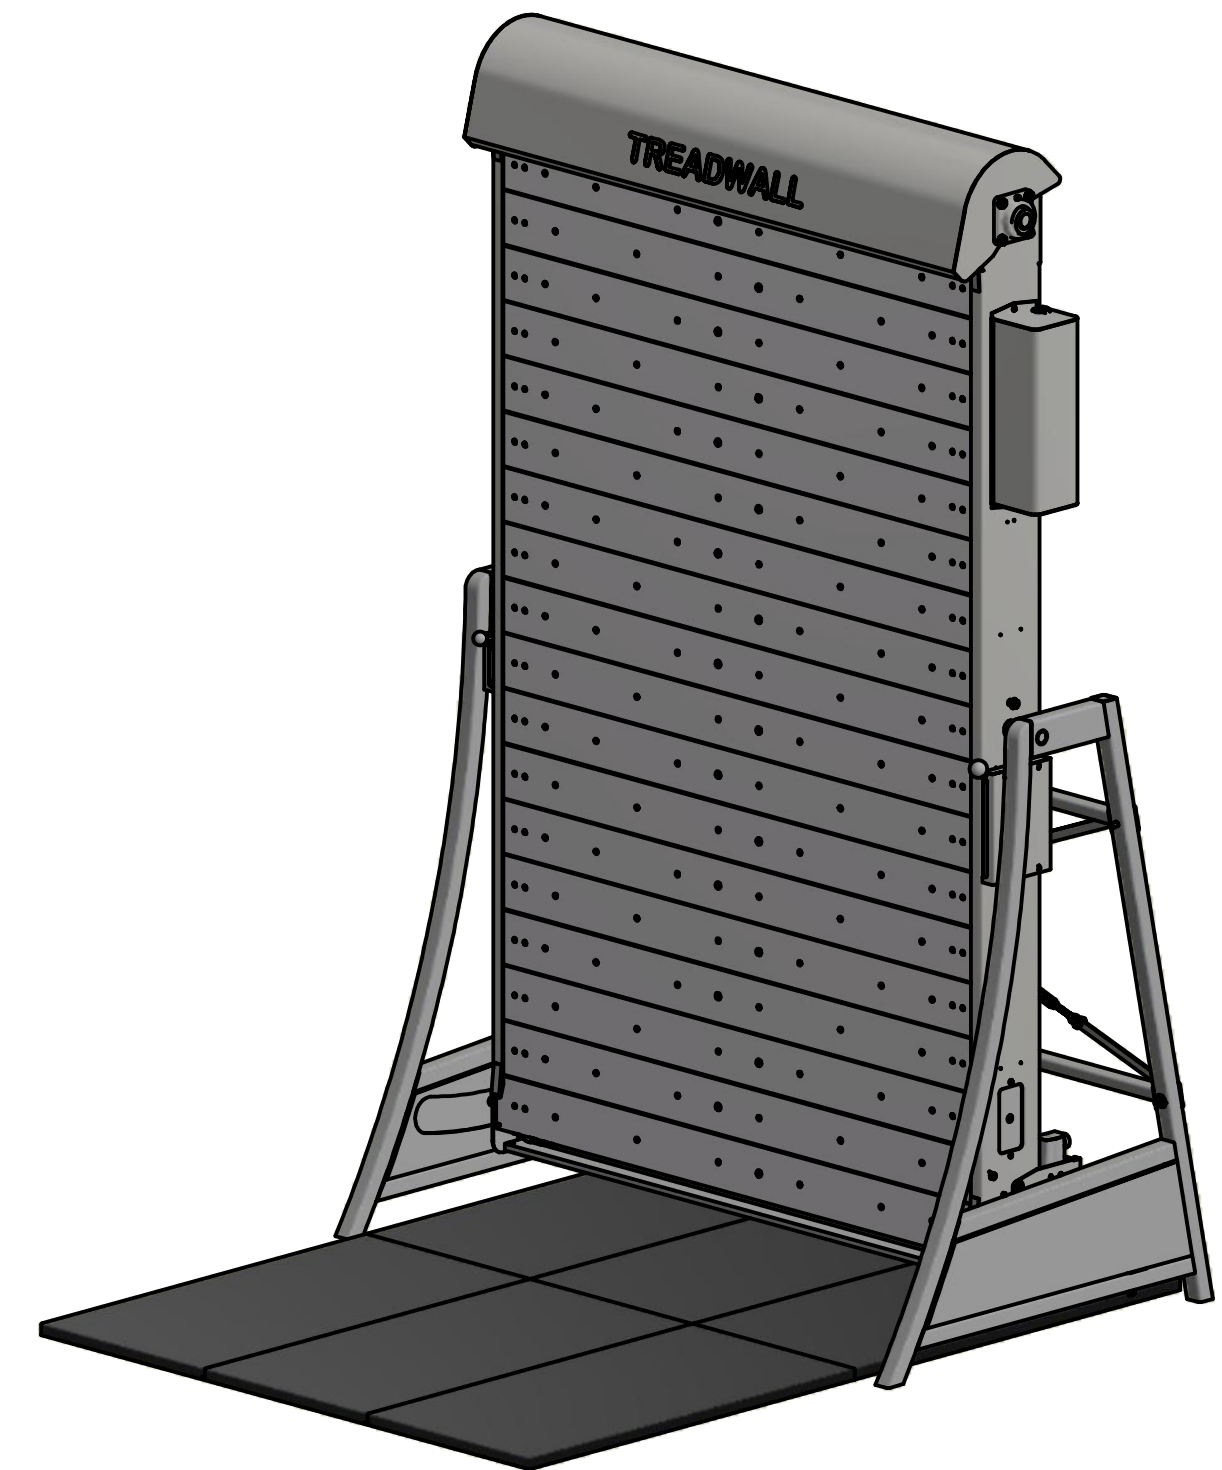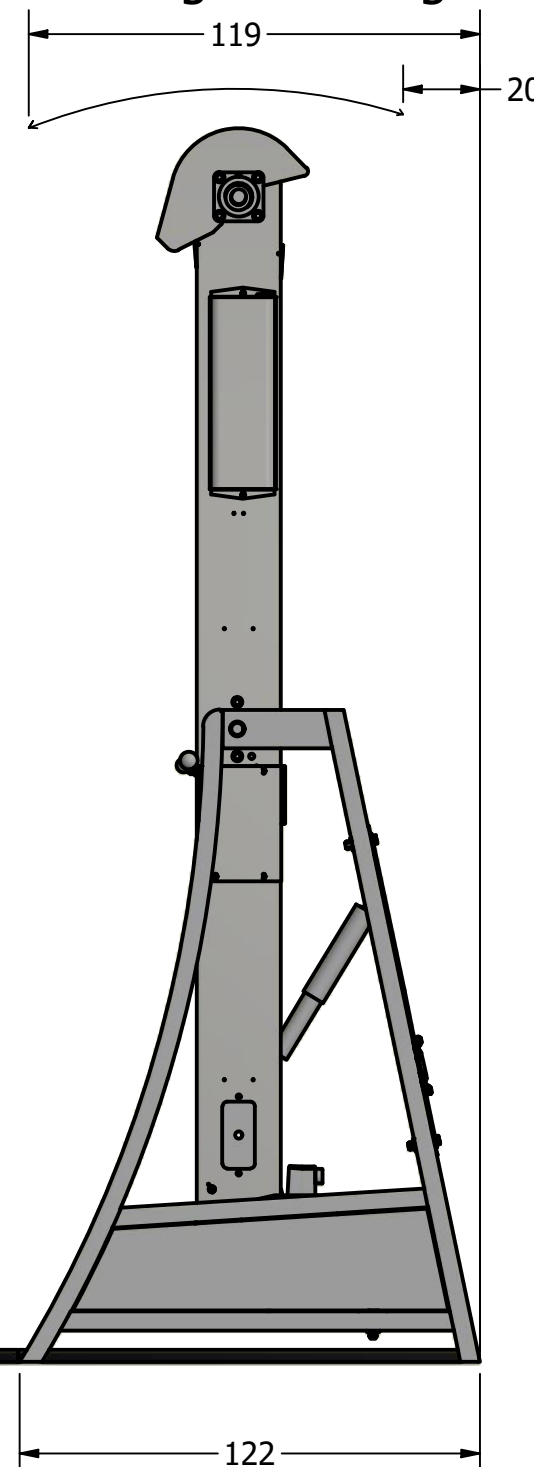

SPECIFICATIONS:

Weight: 476.70 kg.

Construction: Steel framework with custom-machined wood panels.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 1.524 m.

Total length of climbing surface: 5.08 m.

Number of possible hold placements: 240.

Angle range: positive 10 degrees to negative 15 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Electronic Display: Measures distance (feet or meters), time and calories.

Time and distance goals can be pre-set.

Color - frame: Anthracite Gray is standard. Custom colors available.

Color - panels: Natural Wood

Holds: Set of 45 custom training holds in 3 color groups, with optional 14 ladder Line^(tm) holds.



Maximum hold size: 6.35 cm high by 15.24 cm wide.

Floor Mat: 2.032 m x 1.524 m custom mat, 3.175 cm dual foam, black 14 oz. vinyl cover.



Warranty: Six years parts, one year electronics and labor.

See full warranty for details.

Treadwall® S6/12 Rotating Walls

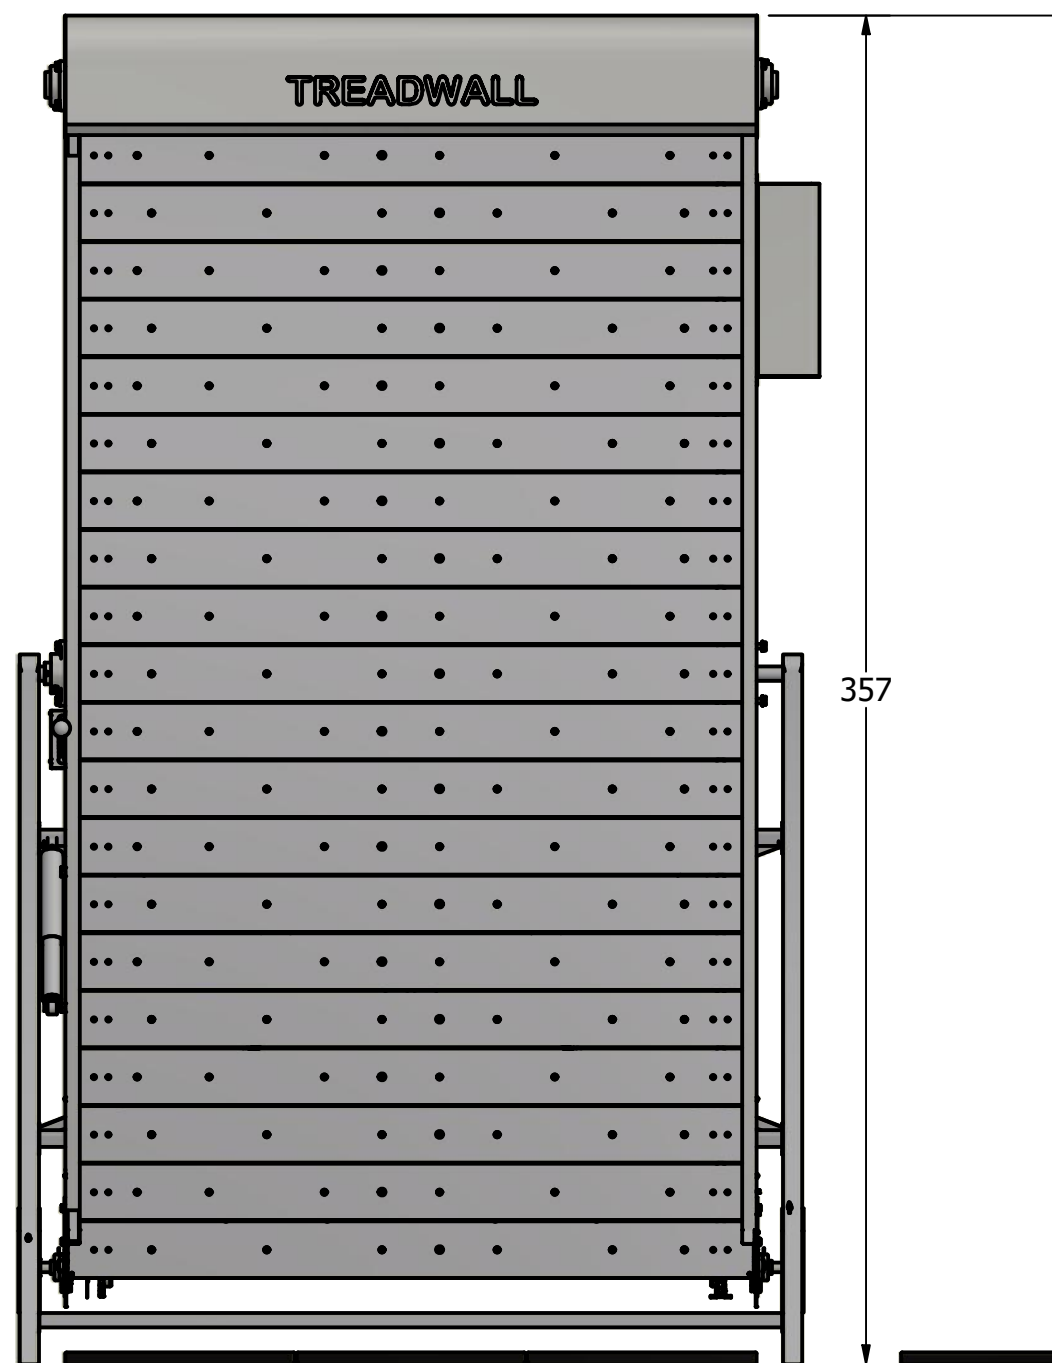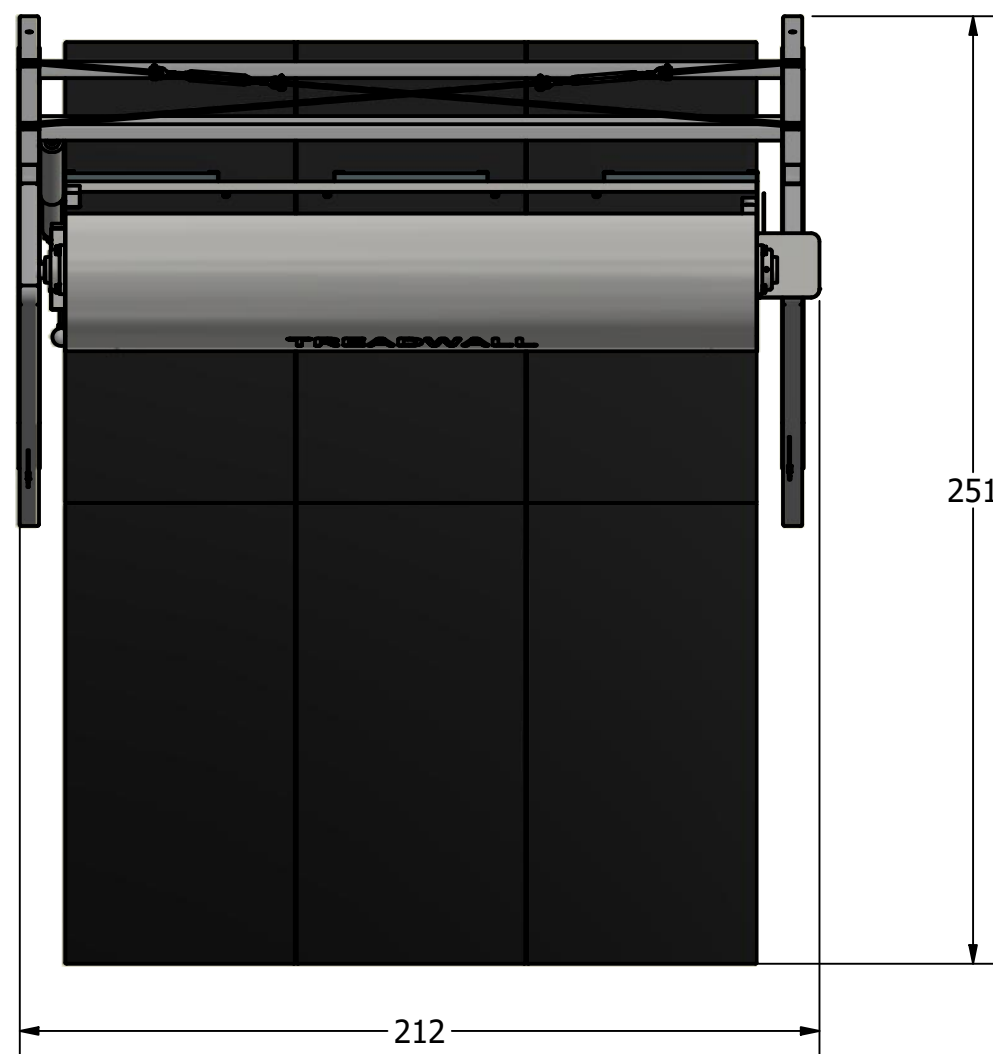

The Treadwall S6/12 combines a large surface with a smaller footprint designed specifically for fitness and training facilities. It has a generously sized climbing surface - 1.524 meter wide by 3 meter high that encourages sideways as well as upward movement. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop^(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The S6/12 is designed to fit under a 3.6 meter ceiling. See the S6/10 and S6/11 units for lower ceilings.

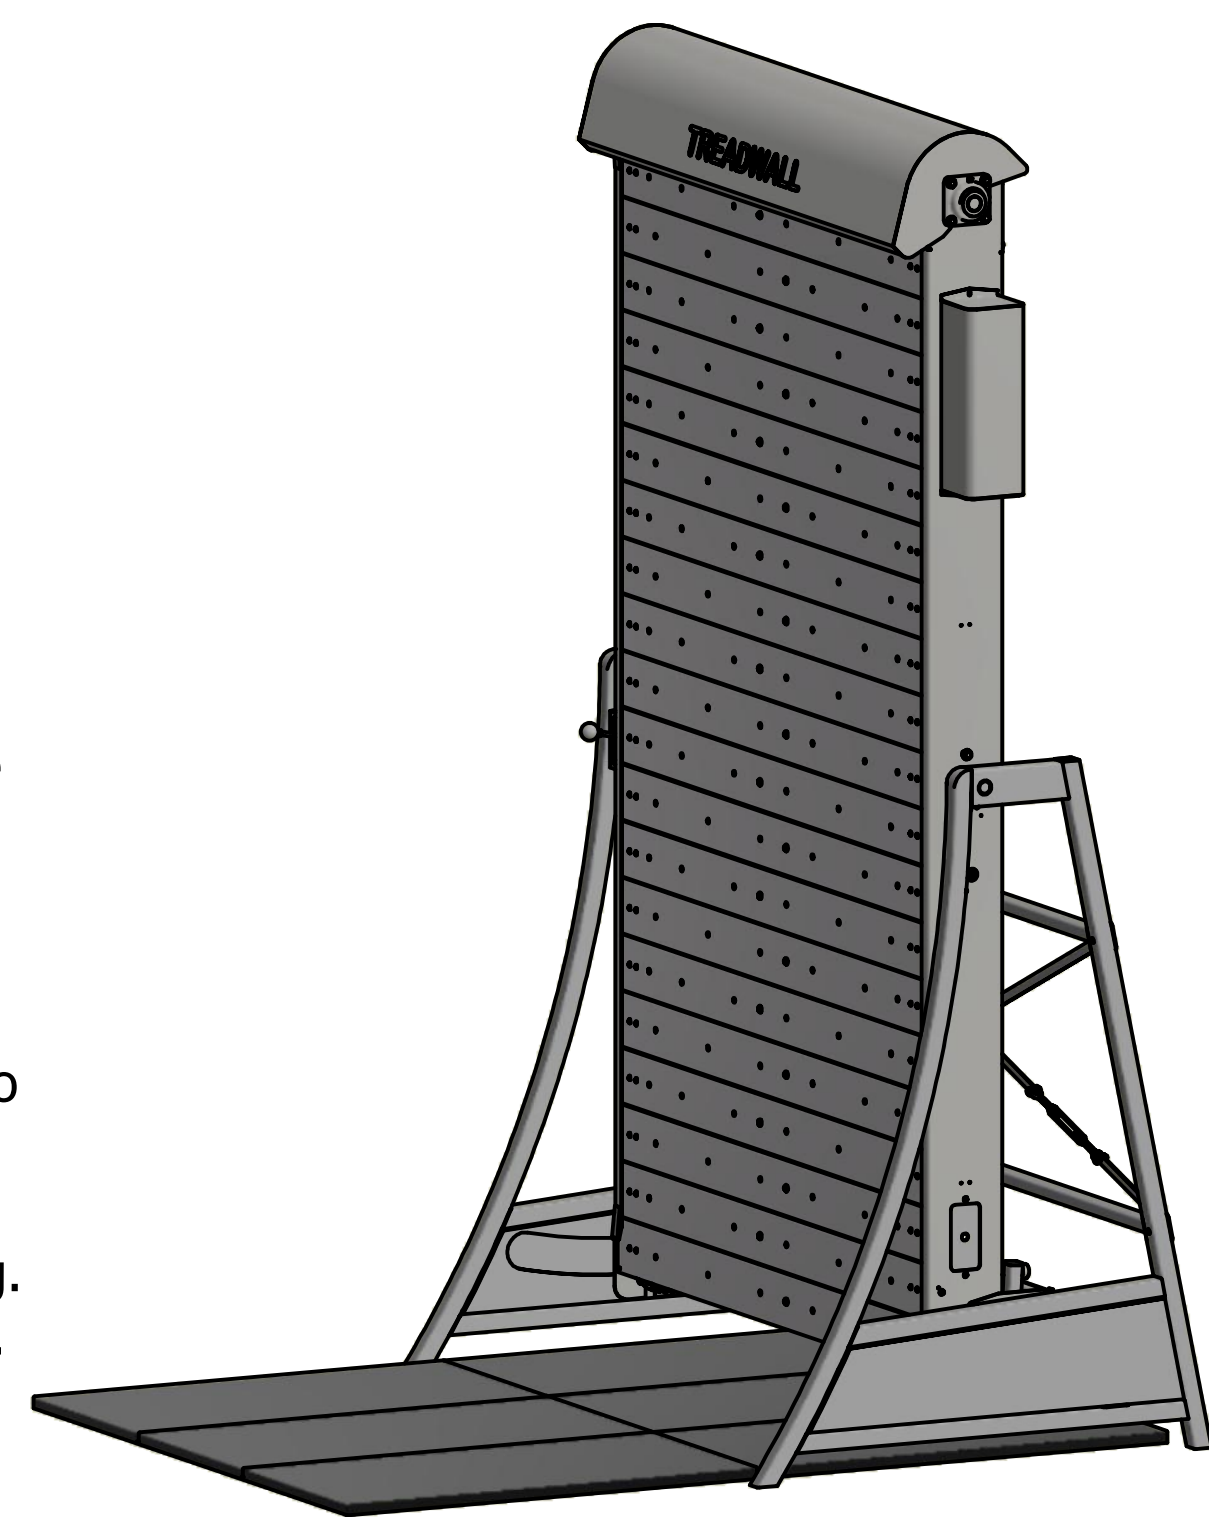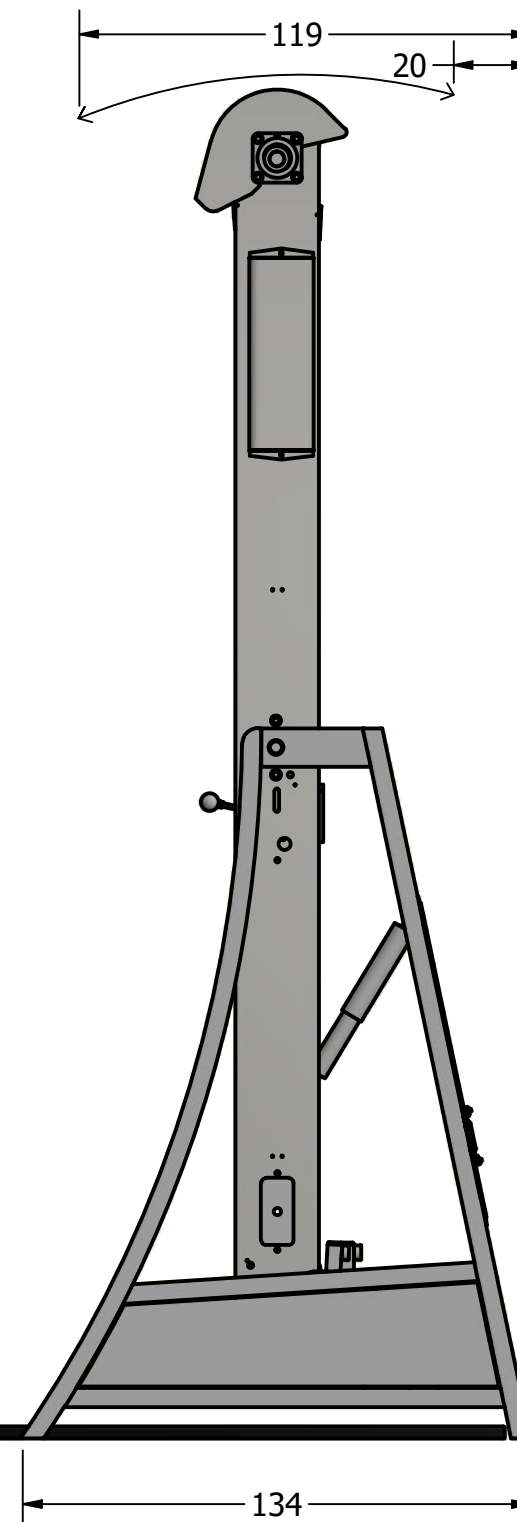

SPECIFICATIONS:

Weight: 499.40 kg.

Construction: Steel framework with custom-machined wood panels.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 1.524 m.

Total length of climbing surface: 5.588 m.

Number of possible hold placements: 264.

Angle range: positive 10 degrees to negative 15 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Electronic Display: Measures distance (feet or meters), time and calories.

Time and distance goals can be pre-set.

Color - frame: Anthracite Gray is standard. Custom colors available.

Color - panels: Natural Wood

Holds: Set of 45 custom training holds in 3 color groups, with optional 14 ladder Line^(tm) holds.

Maximum hold size: 6.35 cm high by 15.24 cm wide.

Floor Mat: 2.032 m x 1.524 m custom mat, 3.175 cm dual foam, black 14 oz. vinyl cover.

Warranty: Six years parts, one year electronics and labor.

See full warranty for details.