

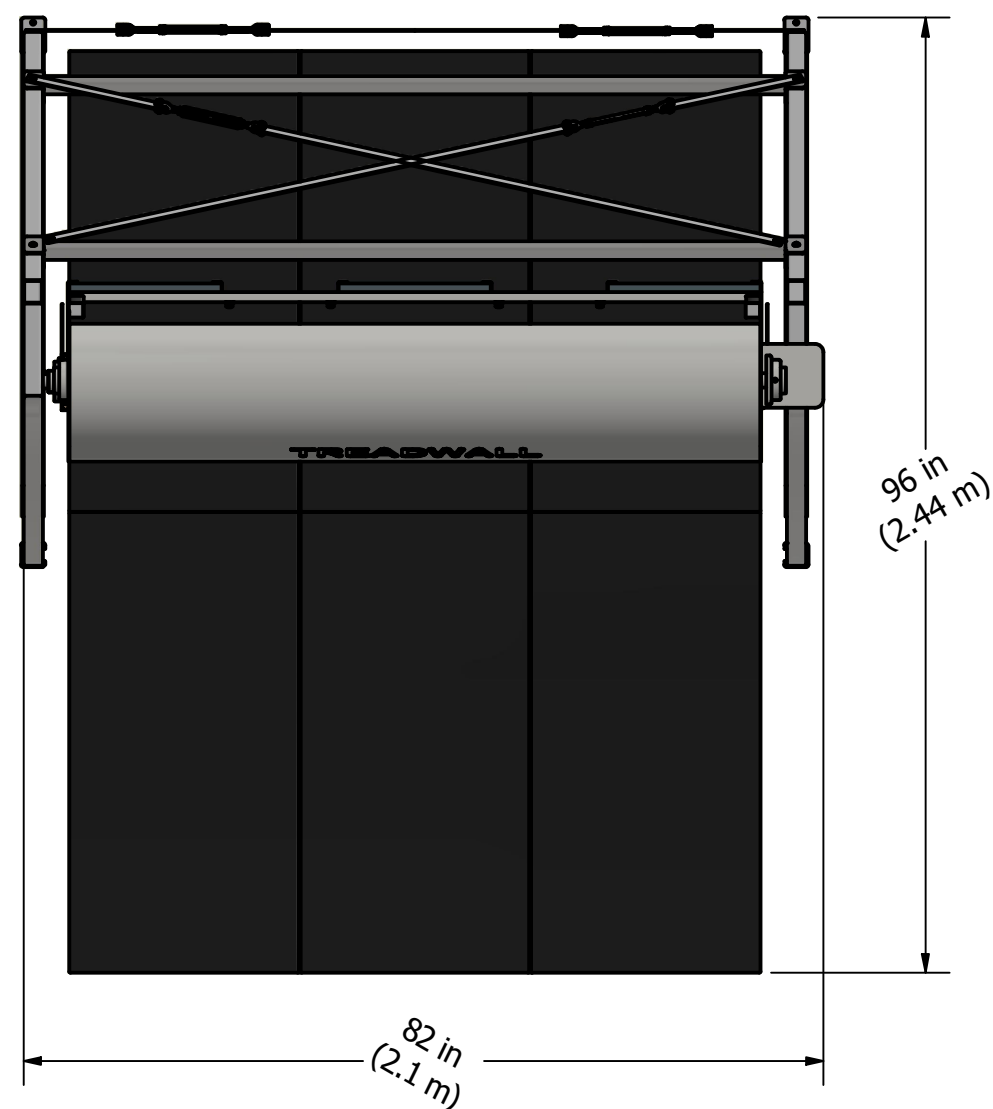


Treadwall® Max6/10 Rotating Walls

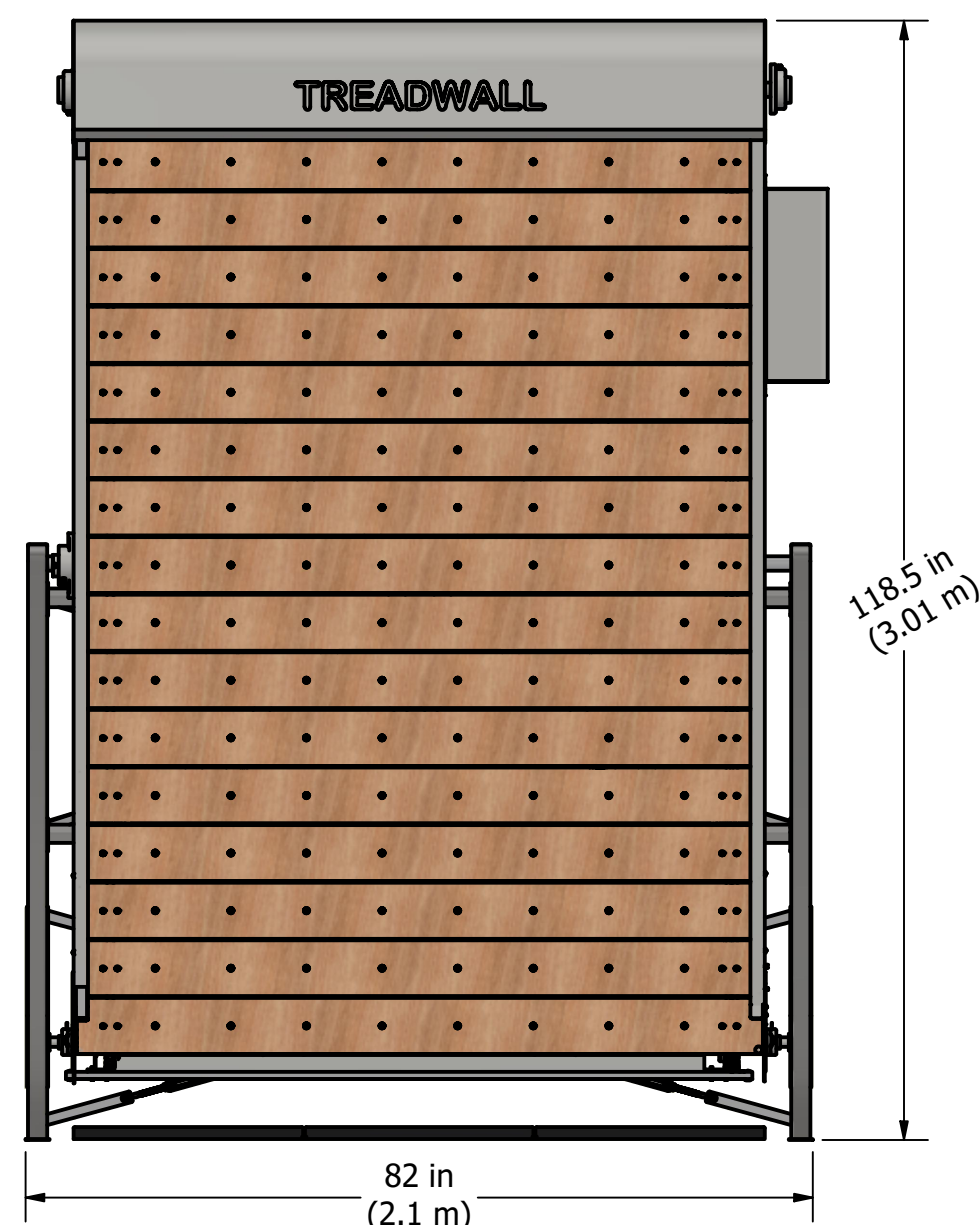


Top View

The Treadwall Max6/10 offers the intensity of the Max frame under a lower ceiling. It has a generously sized climbing surface - 6 foot (1.83 m) wide by 8 foot (3.1 m) high that encourages sideways as well as upward movement. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop(™) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The Max6/10 is designed to fit under a 10 foot (3.1 m) ceiling. See the Max6/11 and Max 6/12 units for higher ceilings.

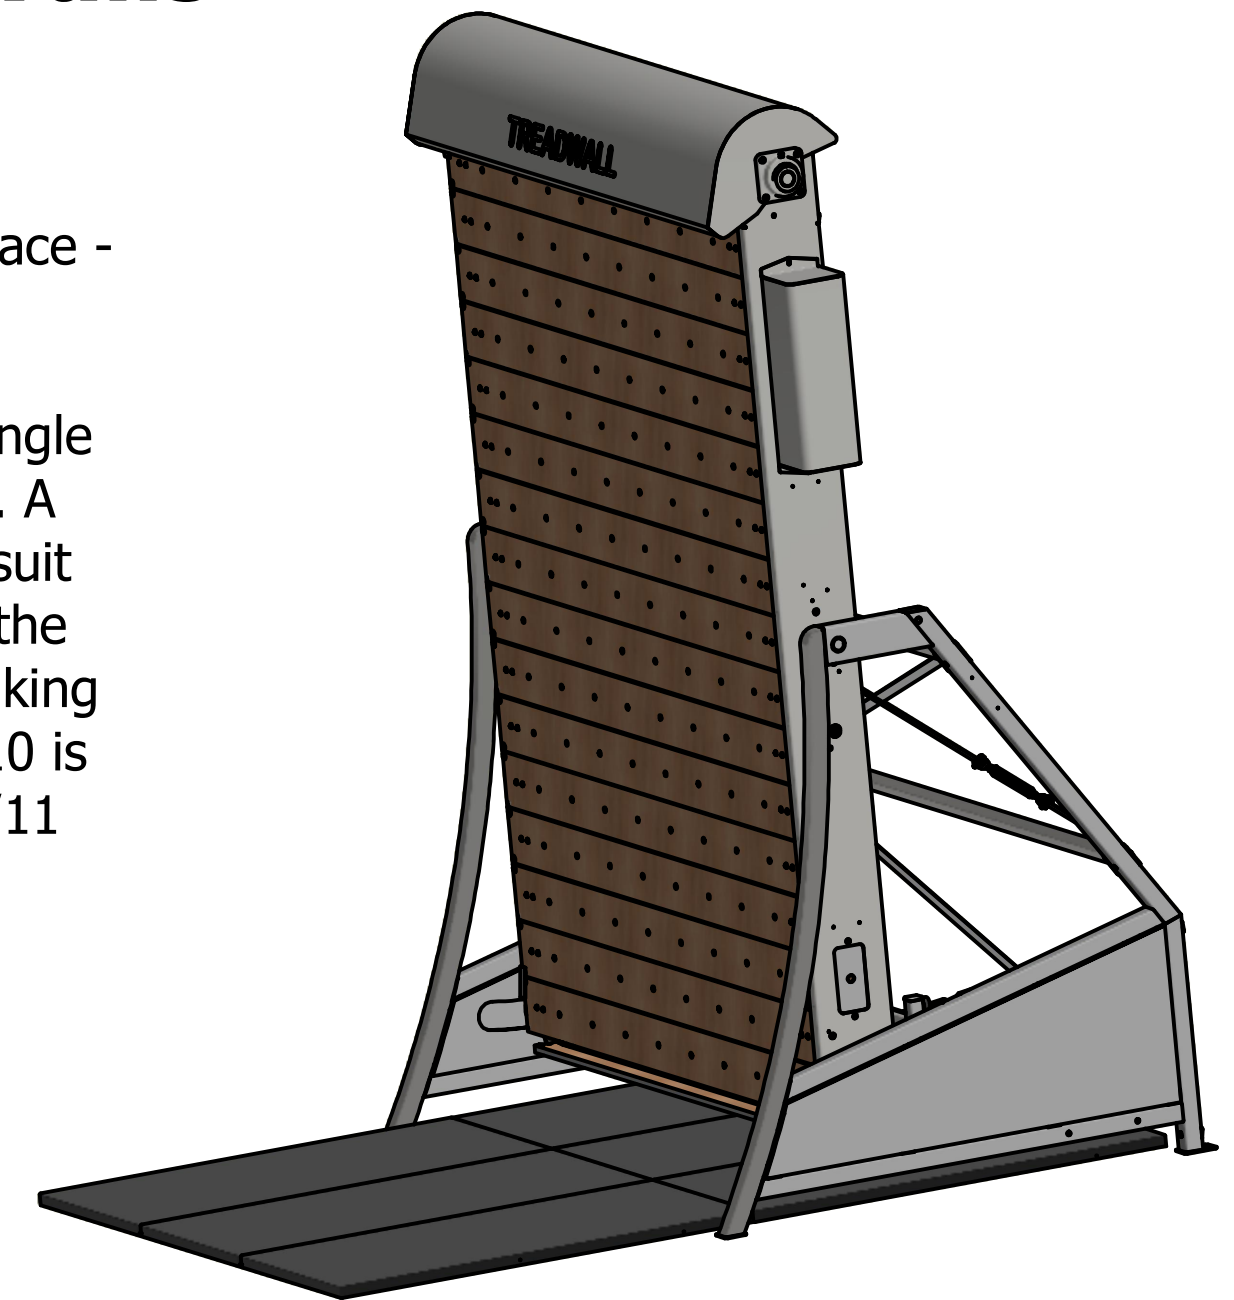

Front View

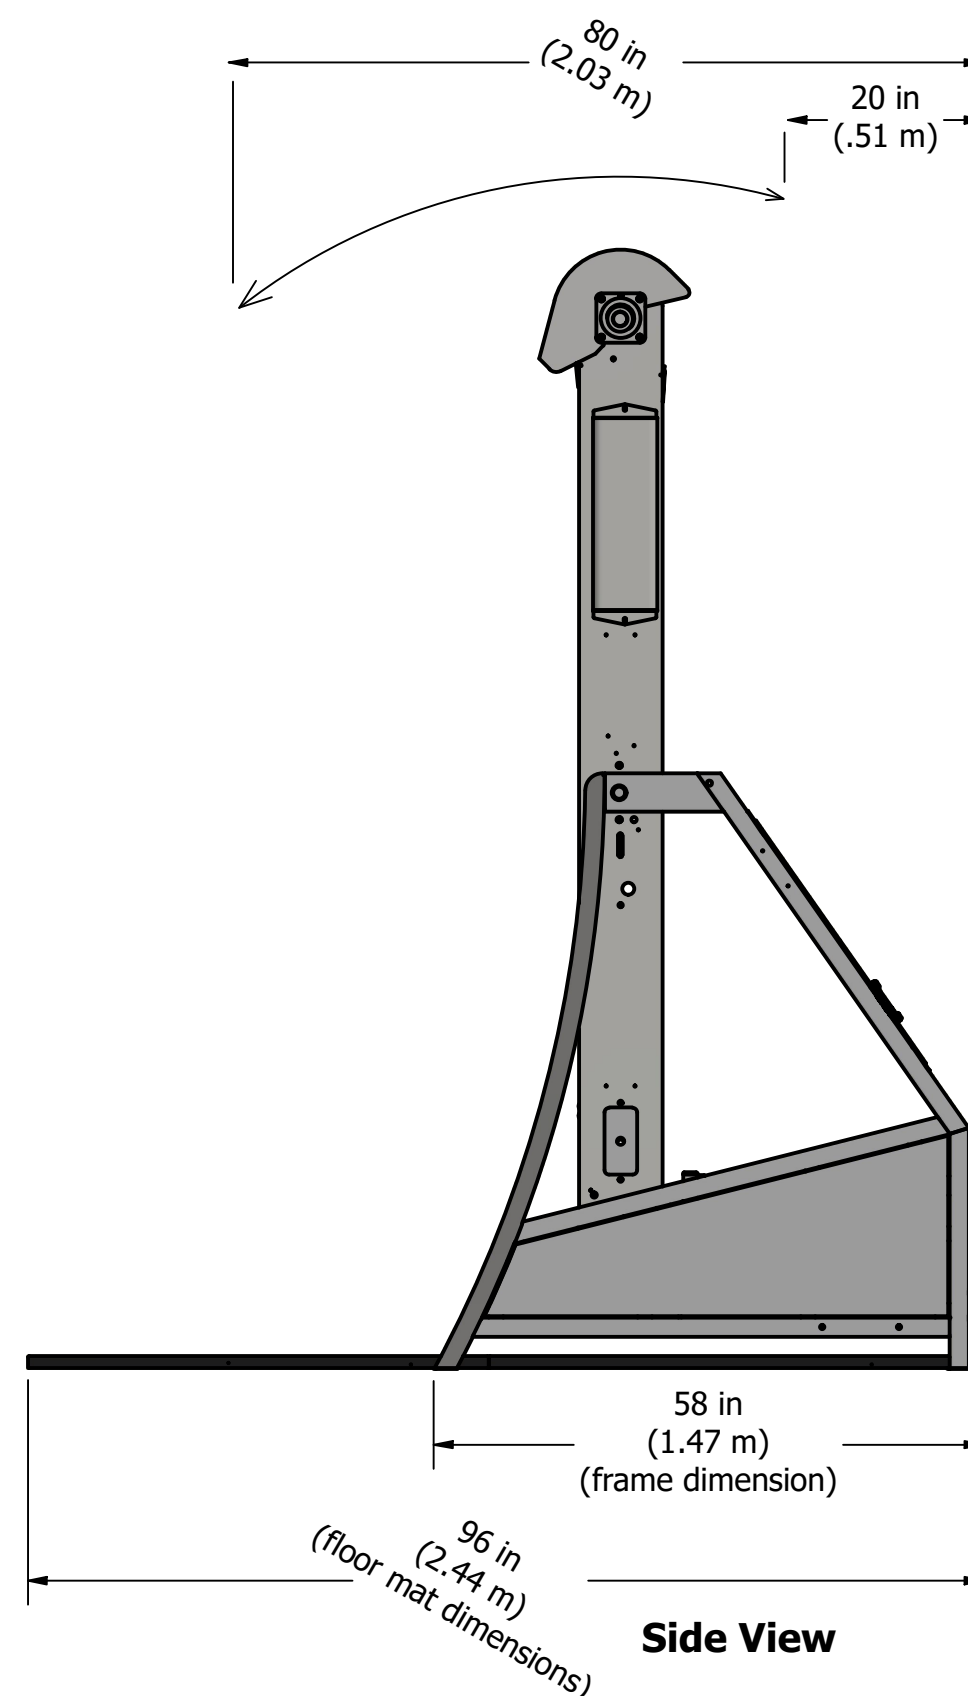

Side View

SPECIFICATIONS:

Weight: 1330 pounds (603 Kg).

Construction: Steel framework with custom-machined wood panels.

Frame color: Anthracite Gray is standard.

Panel color: Natural Wood.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 6 feet (1.83 m).

Total length of climbing surface: 18 feet (5.49 m).

Number of possible hold placements: 288.

Maximum hold size: 2.5 inches (63.5 mm) high by 6 inches (152 mm) wide.

Angle range: positive 10 degrees to negative 35 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Warranty: Six years parts, one year electronics and labor. See full warranty for details.

OPTIONS:

Exterior upgrade: Frame is galvanized and wood panels are coated with an exterior grade coating.

Custom color: Custom frame colors are available, contact us for your color

Holds*: Set of 45 custom training holds in 3 color groups.


Training rungs: 14 ladder Line(™) wood rungs.

Floor Mat*: 8 feet (2.44 m) x 6 feet (1.83 m) custom mat, 1.25 inches (31.75 mm) dual foam, black 14 oz. vinyl cover.


Electronic Display*: Measures distance (feet or meters), time and calories. Time and distance goals can be pre-set.

*Included with Pro-package

Treadwall® Max6/11 Rotating Walls

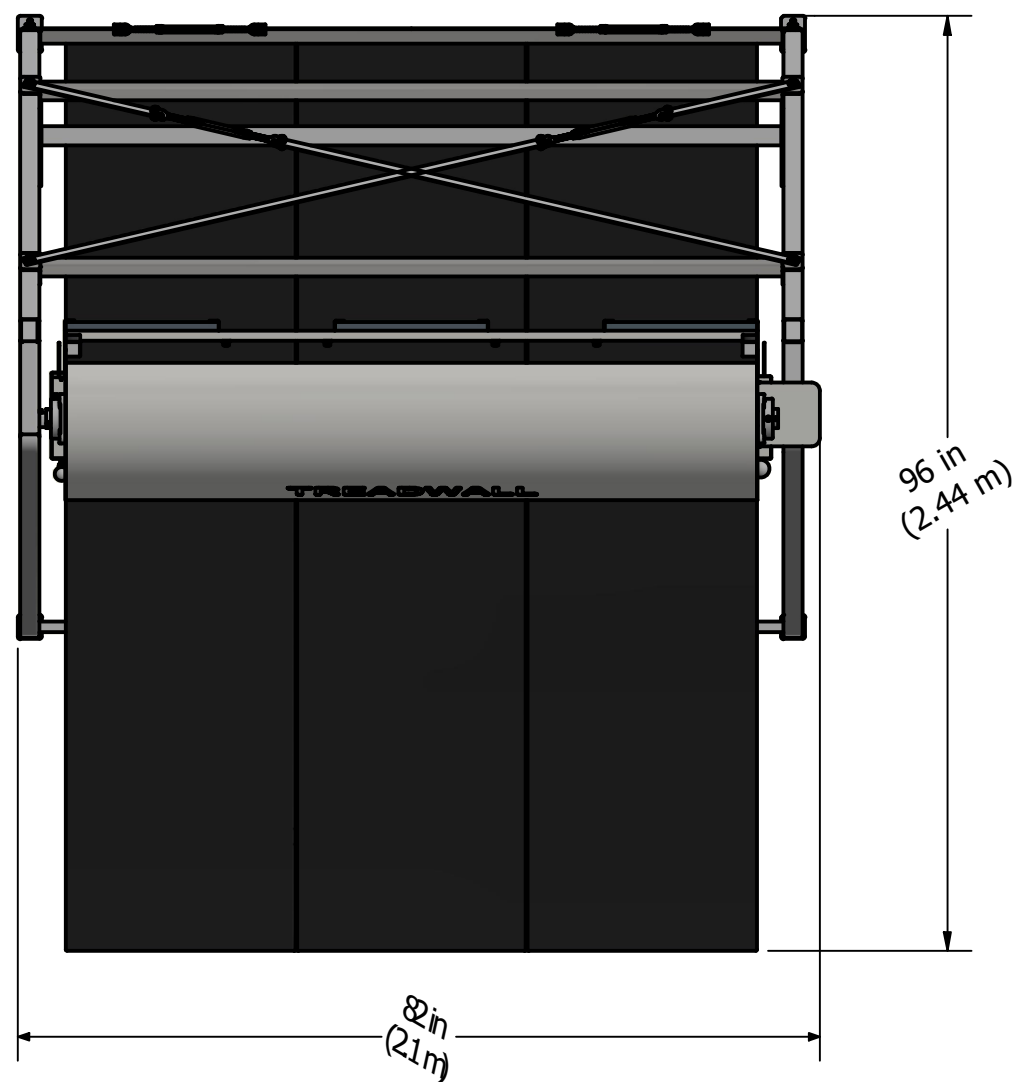


Top View

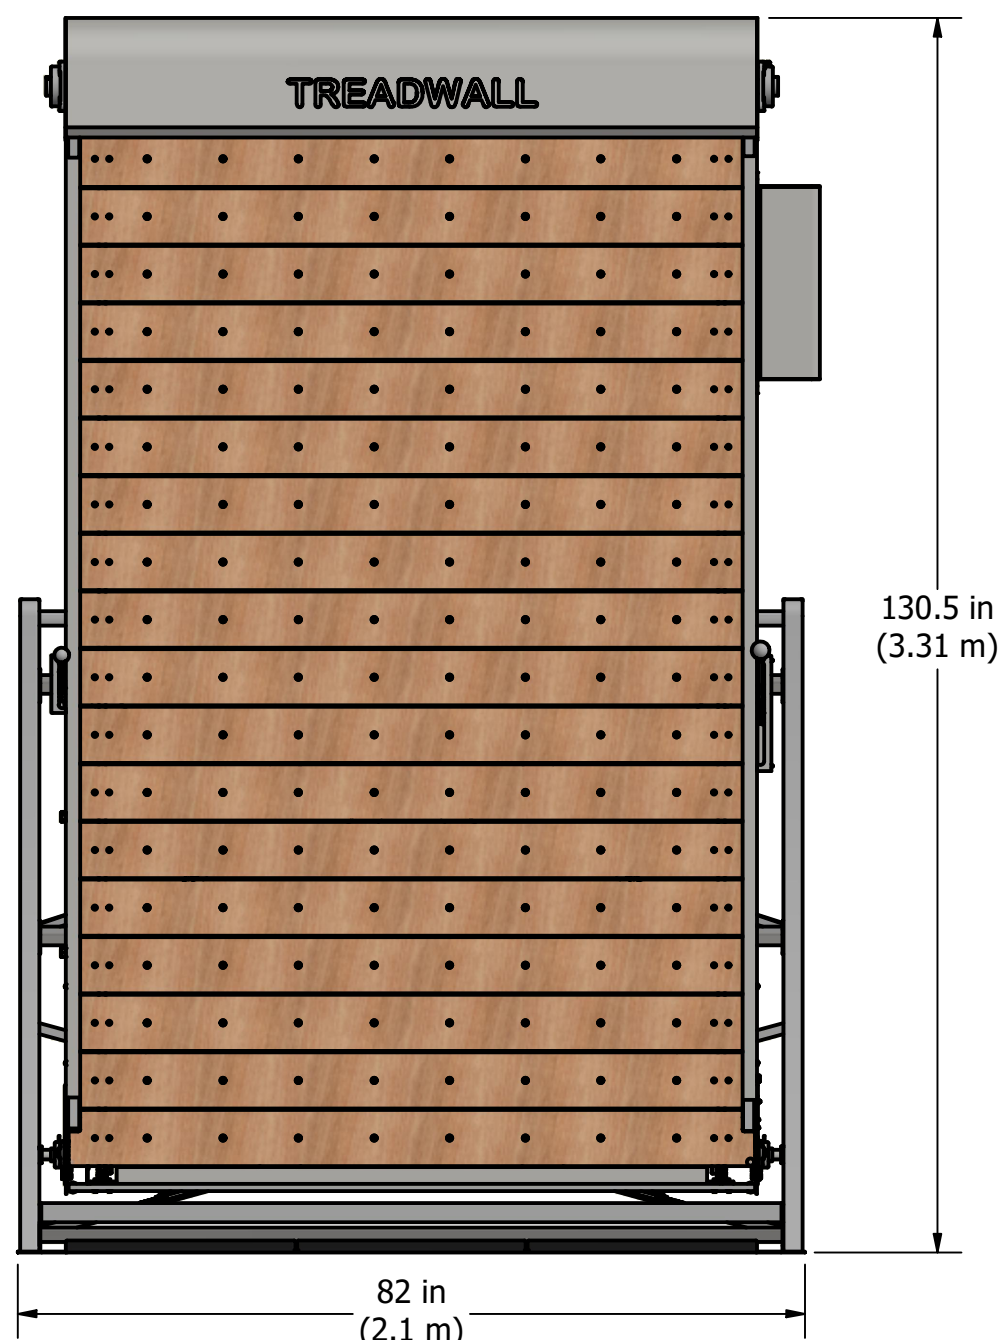


Front View

The Max6/11 is one of our most popular models offering the intensity of the Max frame for home and commercial climbing gyms. It has a generously sized climbing surface - 6 foot (1.83 m) wide by 9 foot (2.75 m) high that encourages sideways as well as upward movement. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The Max6/11 is designed to fit under a 11 foot (3.35 m) ceiling. See the Max6/10 for lower ceilings and Max 6/12 units for higher ceilings.

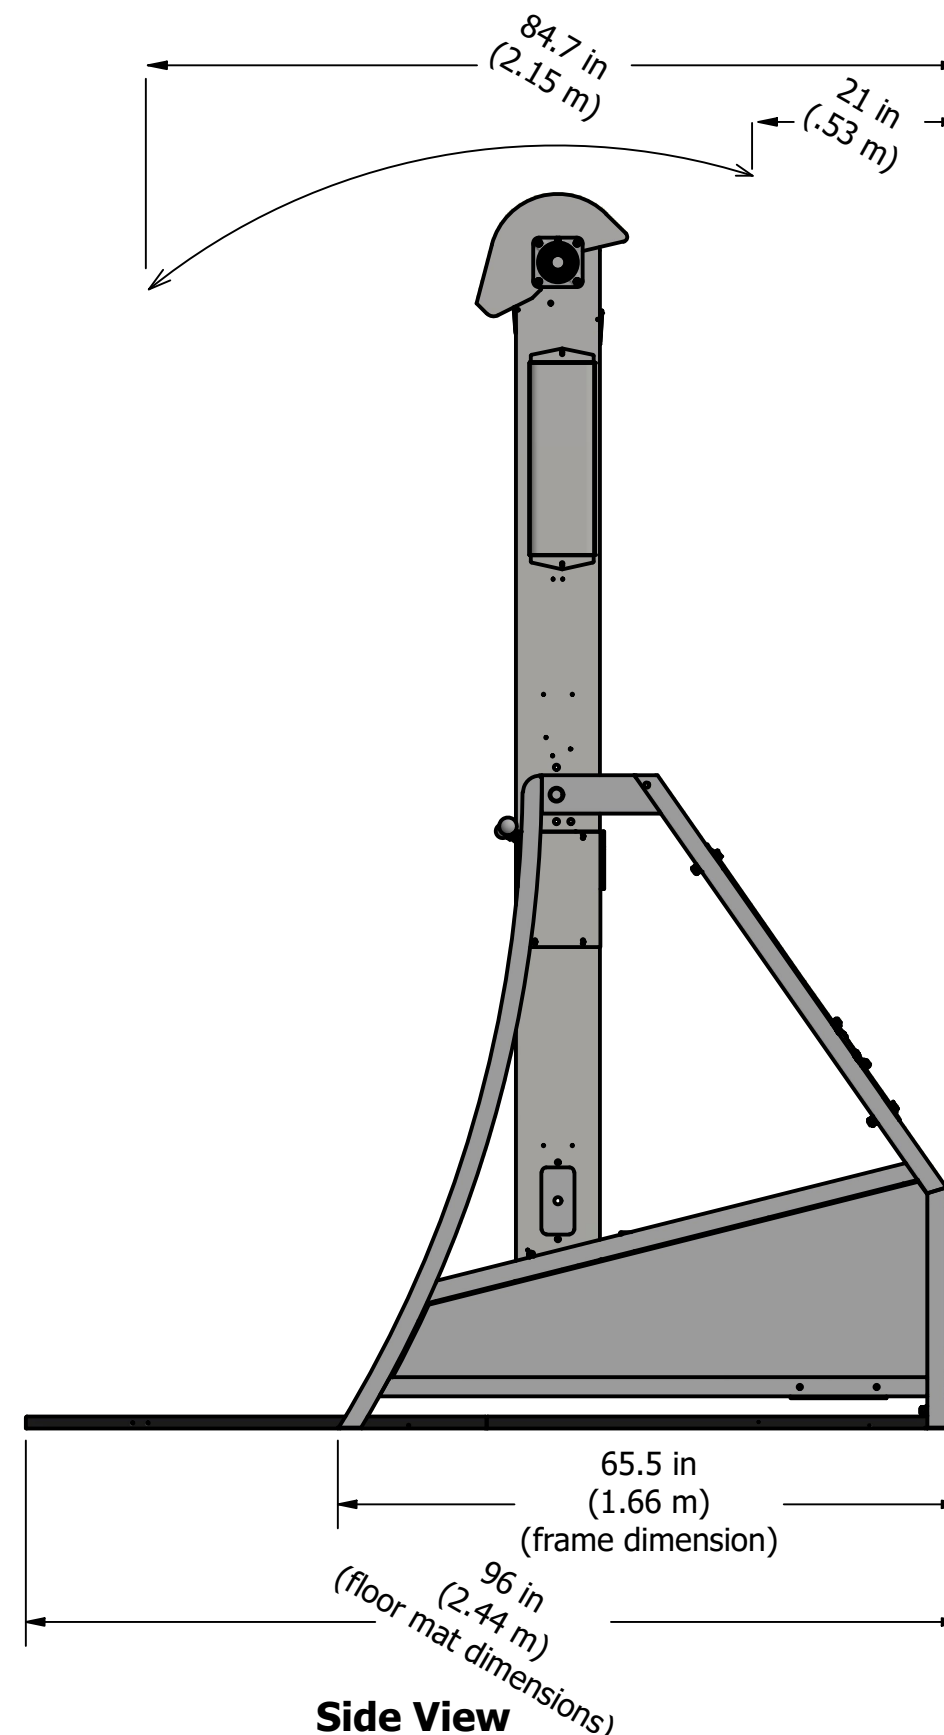

Side View

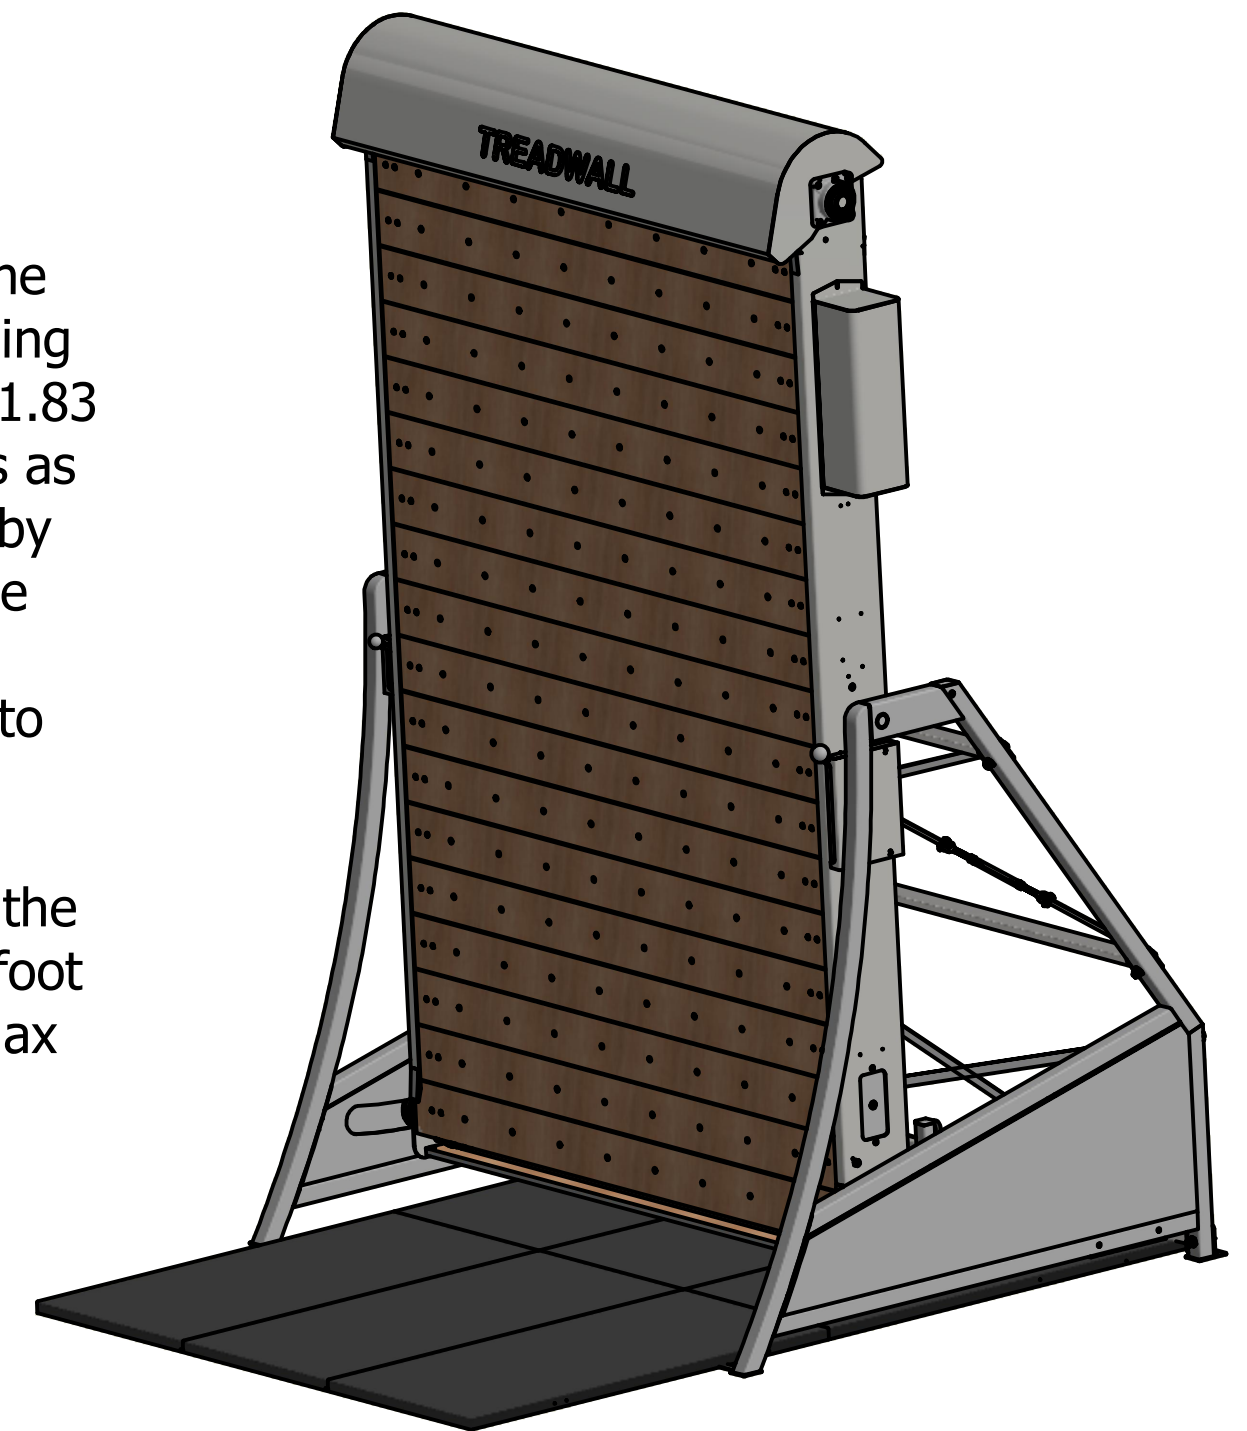

SPECIFICATIONS:

Weight: 1360 pounds (617 Kg).

Construction: Steel framework with custom-machined wood panels.

Frame color: Anthracite Gray is standard.

Panel color: Natural Wood.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 6 feet (1.83 m).

Total length of climbing surface: 20 feet (6.1 m).

Number of possible hold placements: 320.

Maximum hold size: 2.5 inches (63.5 mm) high by 6 inches (152 mm) wide.

Angle range: positive 10 degrees to negative 35 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Warranty: Six years parts, one year electronics and labor. See full warranty for details.

OPTIONS:

Exterior upgrade: Frame is galvanized and wood panels are coated with an exterior grade coating.

Custom color: Custom frame colors are available, contact us for your color

Holds*: Set of 45 custom training holds in 3 color groups.

Training rungs: 14 ladder Line(tm) wood rungs.



Floor Mat*: 8 feet (2.44 m) x 6 feet (1.83 m) custom mat, 1.25 inches (31.75 mm) dual foam, black 14 oz. vinyl cover.

Electronic Display*: Measures distance (feet or meters), time and calories. Time and distance goals can be pre-set.


*Included with Pro-package

Treadwall® Max6/12 Rotating Walls


The Treadwall Max6/12 is our largest model, designed specifically for climbing facilities. It has a generously sized climbing surface - 6 foot (1.83 m) wide by 10 foot (3.1 m) high that encourages sideways as well as upward movement. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The Max6/12 is designed to fit under a 12 foot (3.66 m) ceiling. See the Max6/10 and Max 6/11 units for lower ceilings.

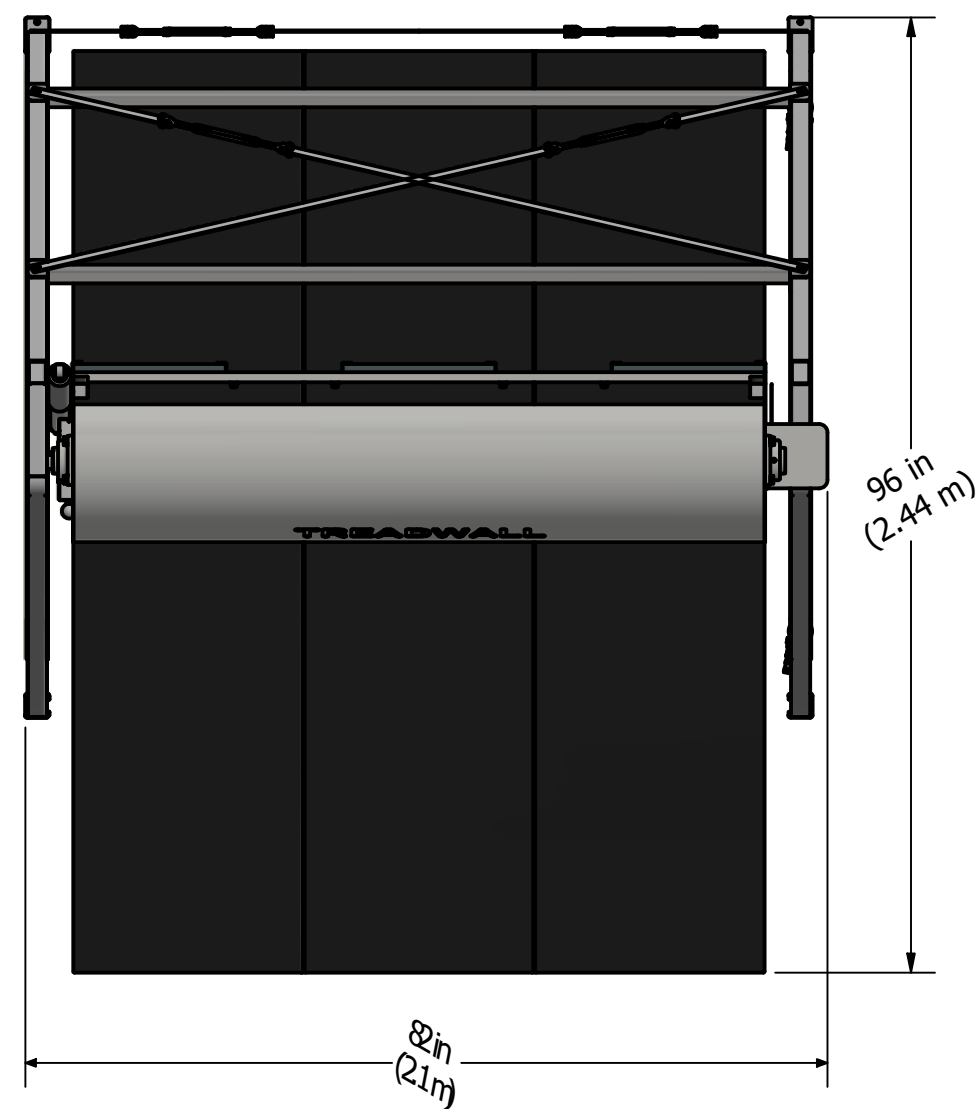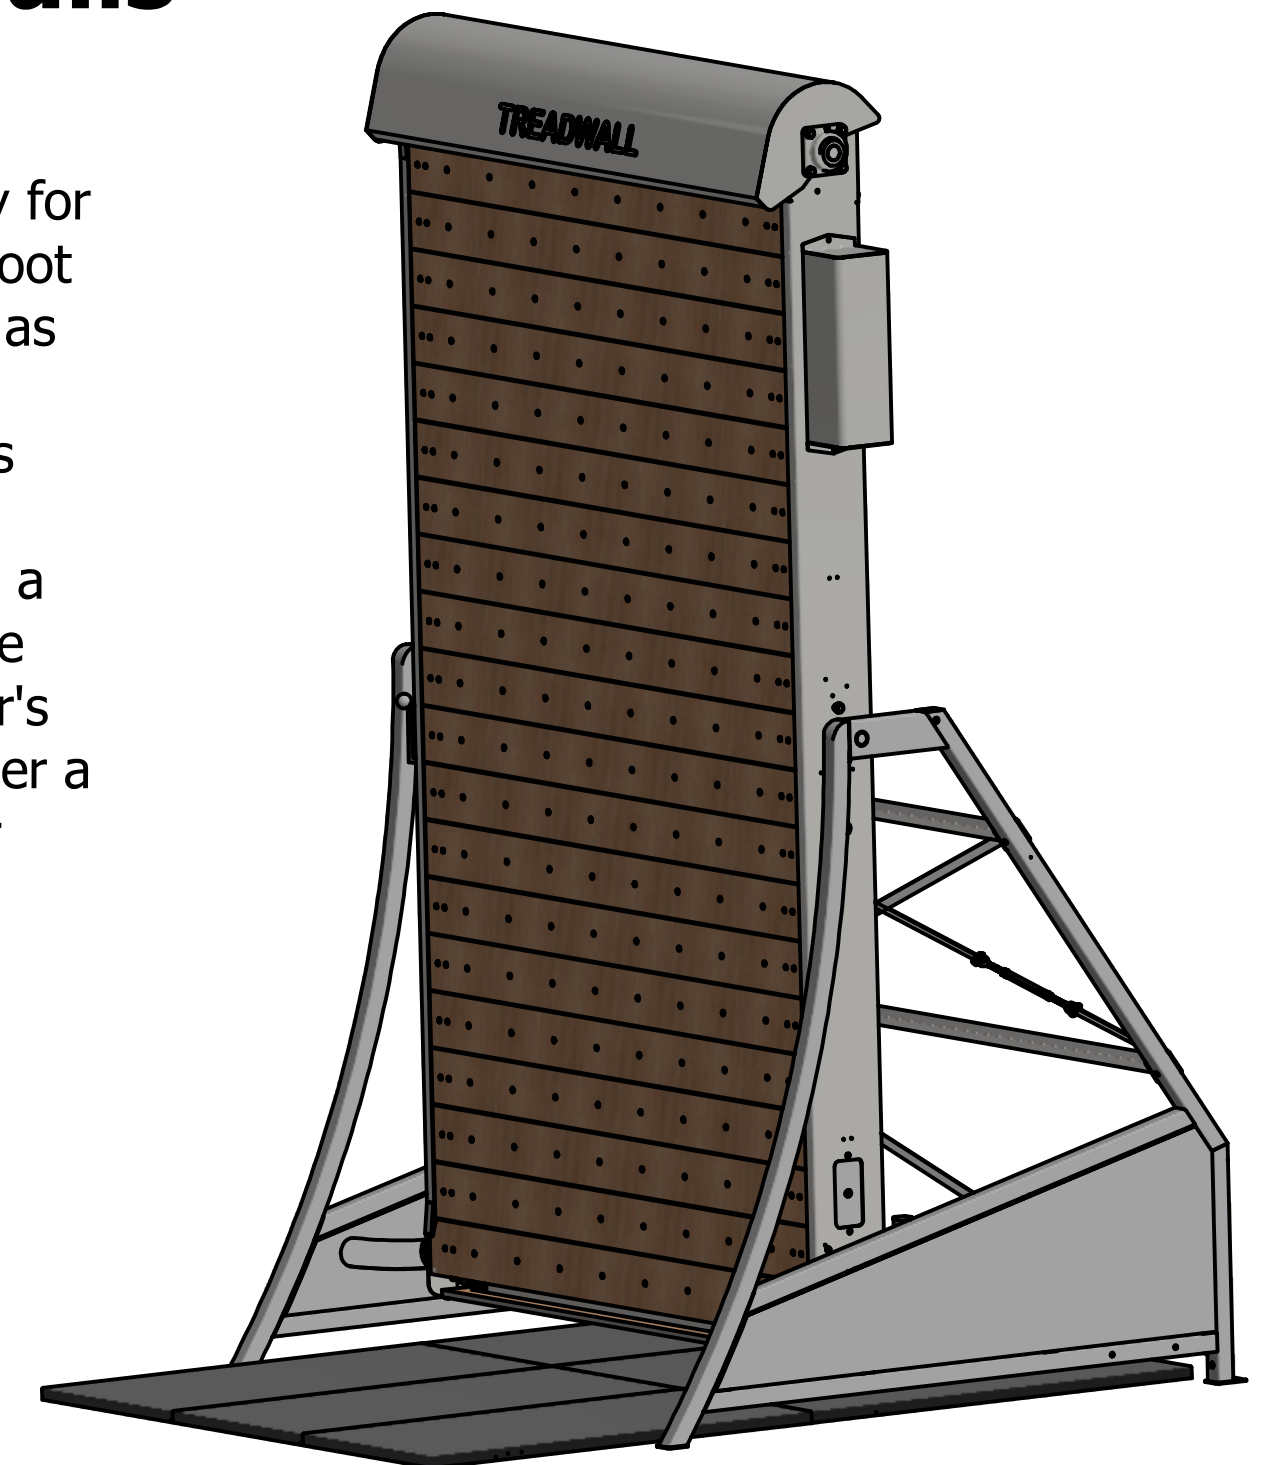

Top View

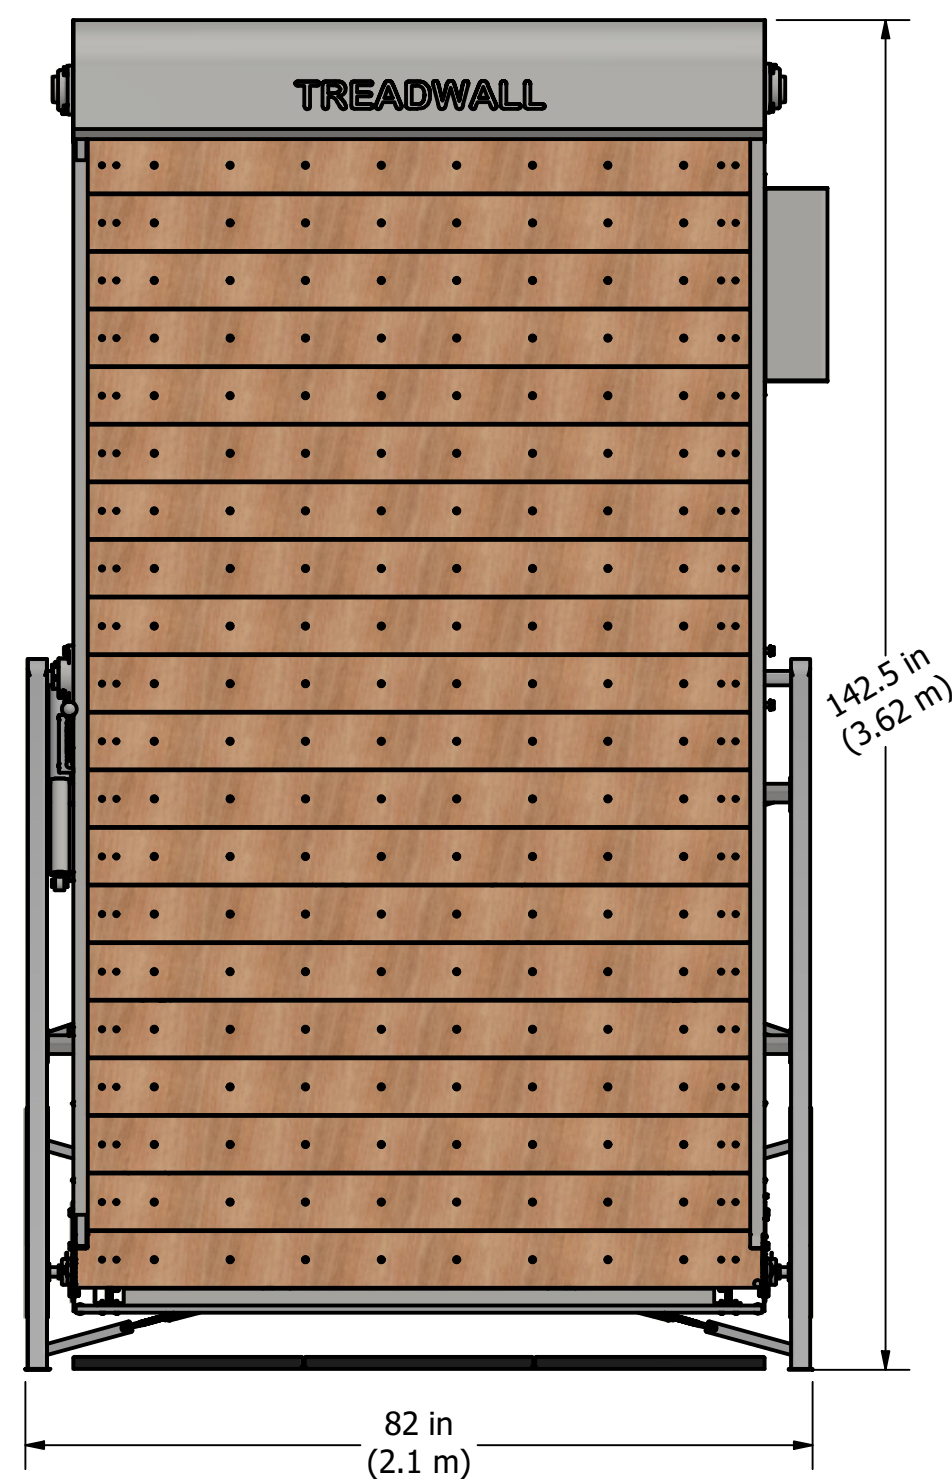

Front View

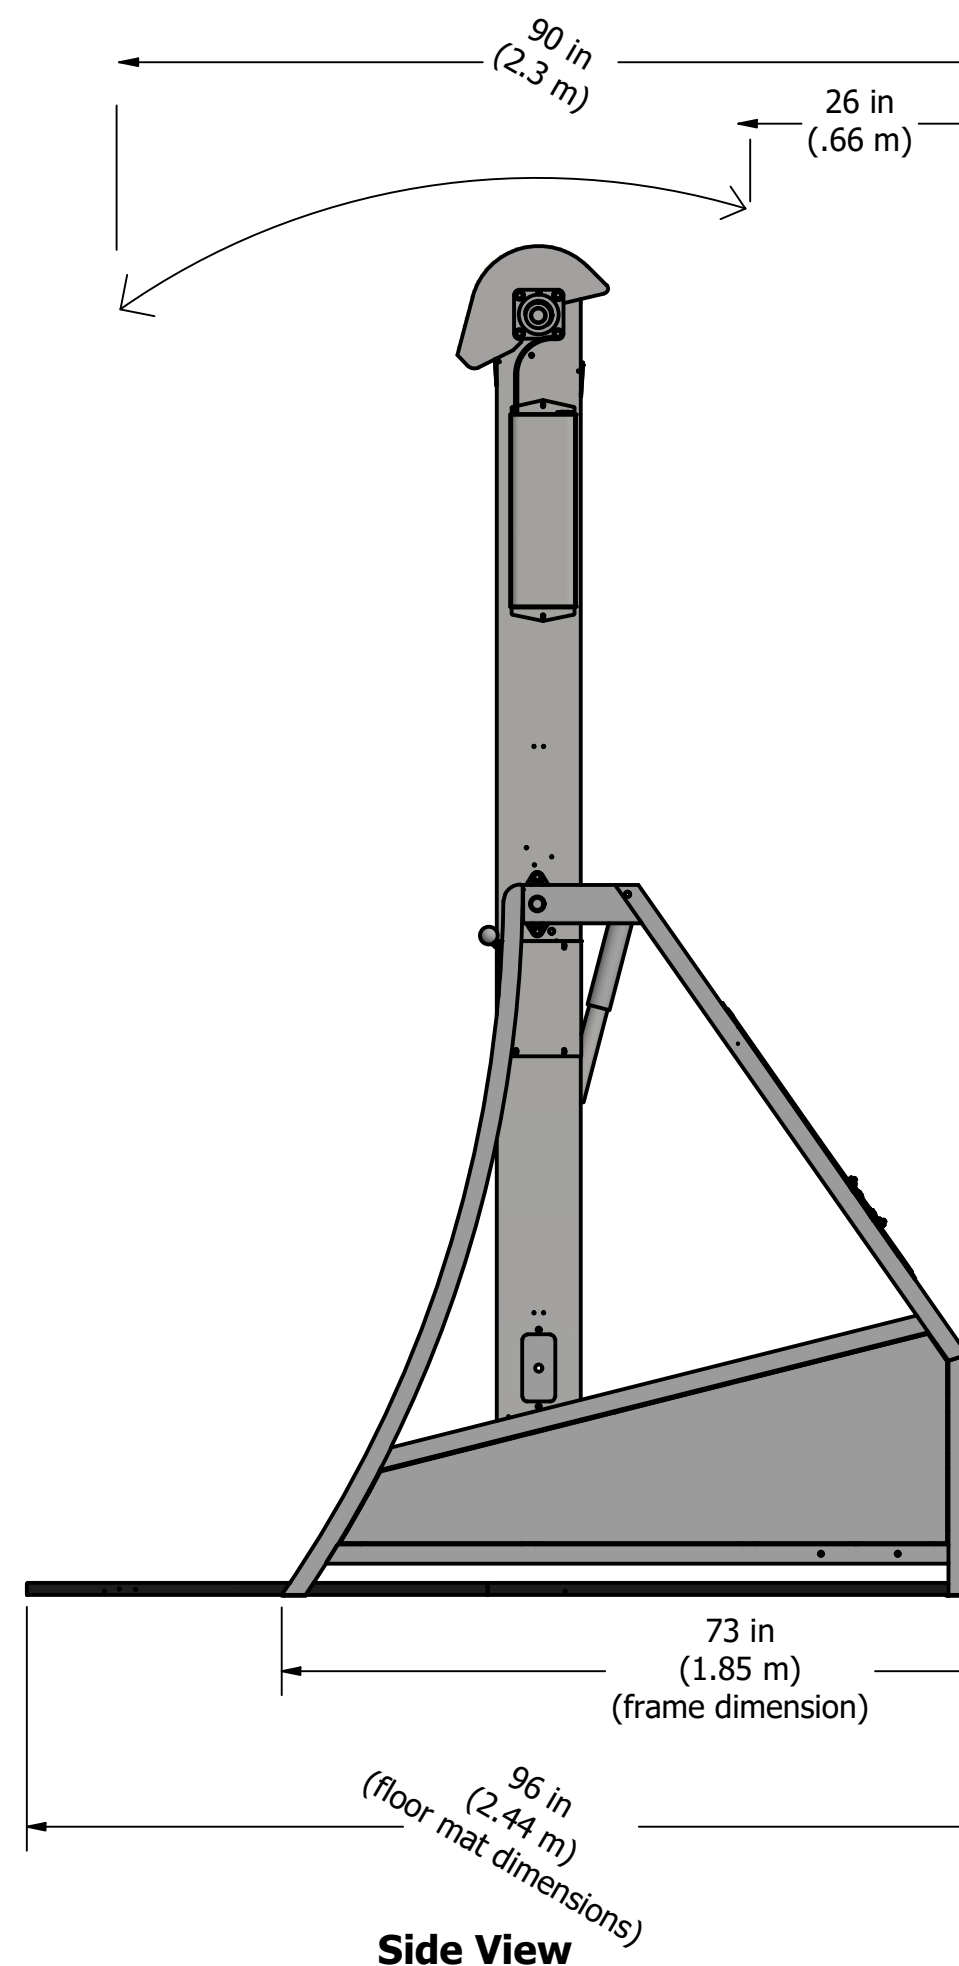

Side View

SPECIFICATIONS:

Weight: 1390 pounds (630.5 Kg).

Construction: Steel framework with custom-machined wood panels.

Frame color: Anthracite Gray is standard.

Panel color: Natural Wood.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 6 feet (1.83 m).

Total length of climbing surface: 22 feet (6.71 m).

Number of possible hold placements: 352.

Maximum hold size: 2.5 inches (63.5 mm) high by 6 inches (152 mm) wide.

Angle range: positive 10 degrees to negative 35 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Warranty: Six years parts, one year electronics and labor. See full warranty for details.

OPTIONS:

Exterior upgrade: Frame is galvanized and wood panels are coated with an exterior grade coating.

Custom color: Custom frame colors are available, contact us for your color

Holds*: Set of 45 custom training holds in 3 color groups.

Training rungs: 14 ladder Line(tm) wood rungs.

Floor Mat*: 8 feet (2.44 m) x 6 feet (1.83 m) custom mat, 1.25 inches (31.75 mm) dual foam, black 14 oz. vinyl cover.

Electronic Display*: Measures distance (feet or meters), time and calories. Time and distance goals can be pre-set.

*Included with Pro-package