

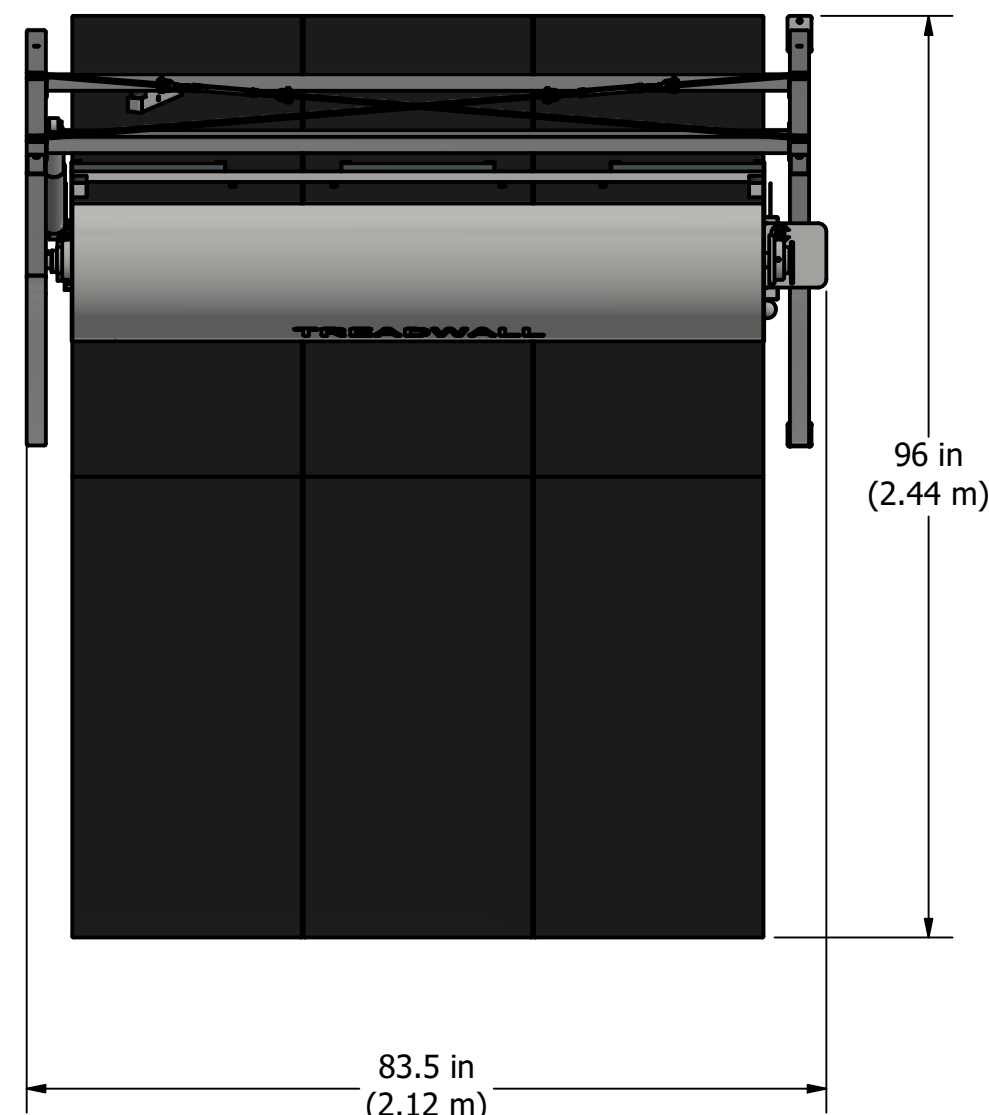


Treadwall® S6/10 Rotating Walls


The Treadwall S6/10 has a wide surface area designed to go under lower ceilings. It has a generously sized climbing surface - 6 foot (1.83 m) wide by 8 foot (2.44 m) high that encourages sideways as well as upward movement. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop^(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The S6/10 is designed to fit under a 10 foot (3.1 m) ceiling. See the S6/11 and S6/12 units for higher ceilings.

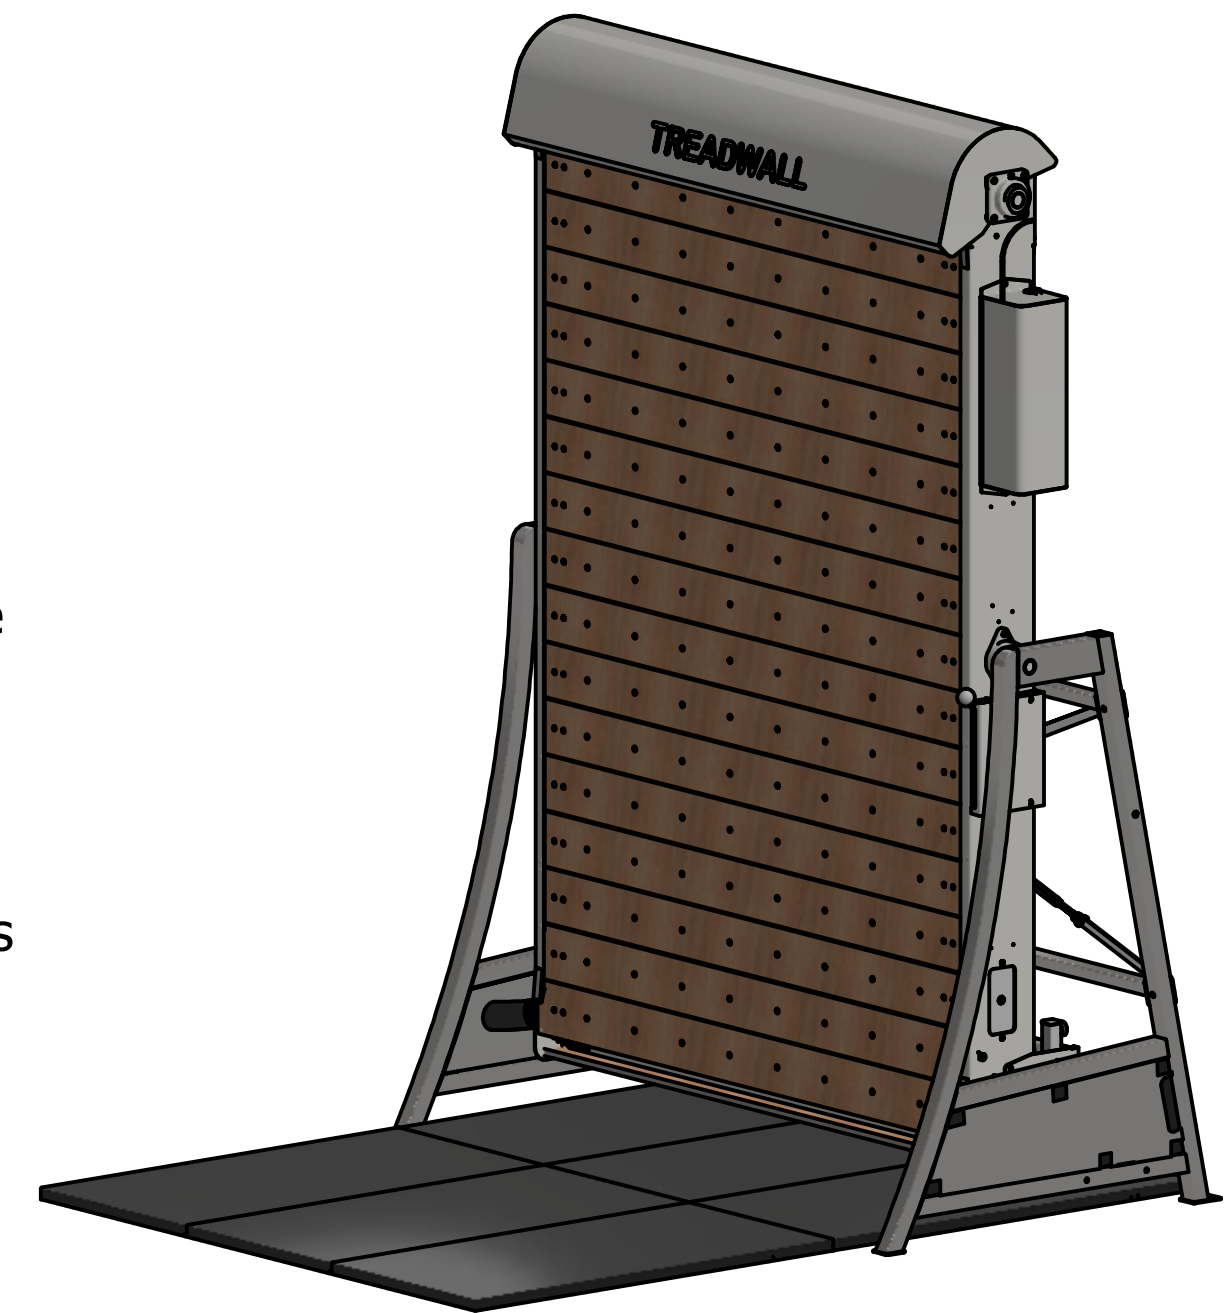

Top View

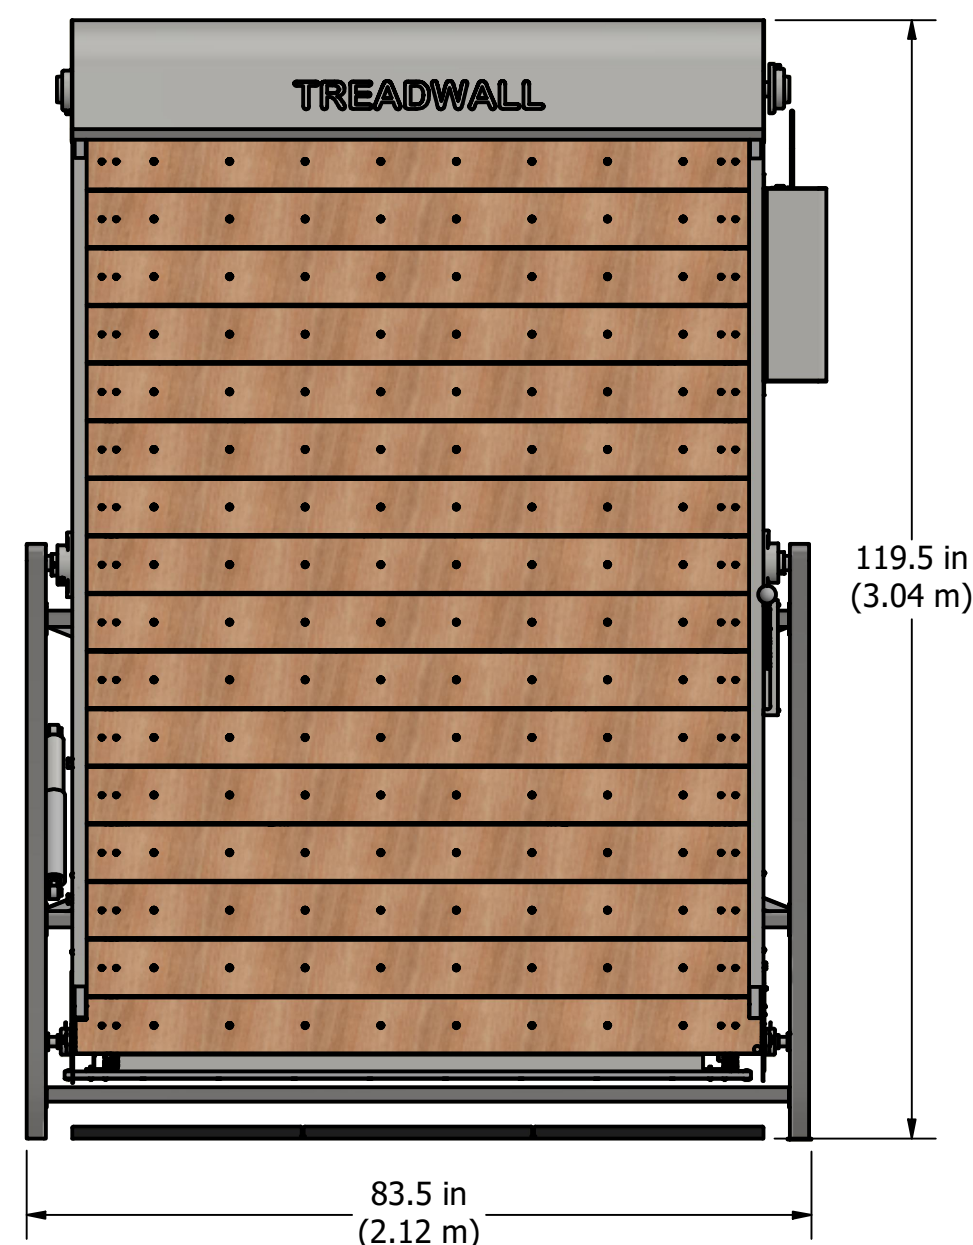

Front View

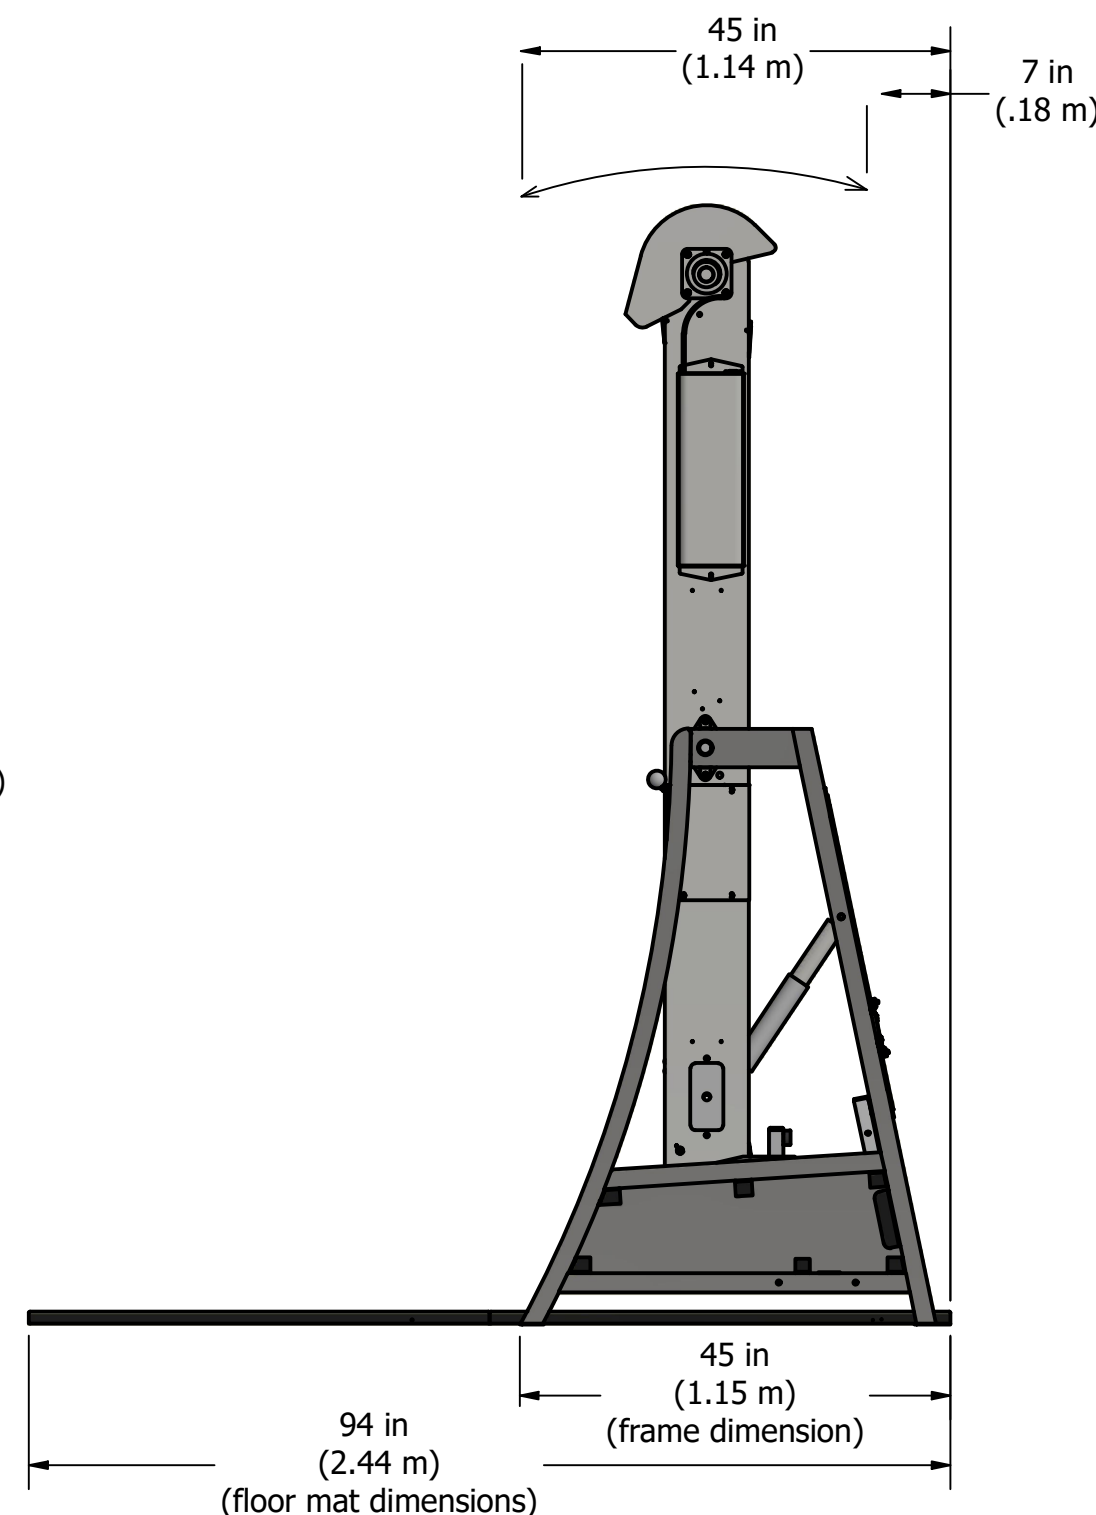

Side View

SPECIFICATIONS:

Weight: 1182 pounds (536 Kg).
Construction: Steel framework with custom-machined wood panels.
Frame color: Anthracite Gray is standard.
Panel color: Natural Wood.
Placement: Inside standard - outside with exterior upgrade.
Width of climbing surface: 6 feet (1.83 m).
Total length of climbing surface: 20 feet (6.1 m).
Number of possible hold placements: 320.
Maximum hold size: 2.5 inches (63.5 mm) high by 6 inches (152 mm) wide.
Angle range: positive 10 degrees to negative 35 degrees (overhanging).
Mode of control: Electro-hydraulic braking and resistance.
Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.
Warranty: Six years parts, one year electronics and labor. See full warranty for details.


OPTIONS:

Exterior upgrade: Frame is galvanized and wood panels are coated with an exterior grade coating.
Custom color: Custom frame colors are available, contact us for your color
Holds*: Set of 45 custom training holds in 3 color groups.
Training rungs: 14 ladder Line^(tm) wood rungs.
Floor Mat*: 8 feet (2.44 m) x 6 feet (1.83 m) custom mat, 1.25 inches (31.75 mm) dual foam, black 14 oz. vinyl cover.
Electronic Display*: Measures distance (feet or meters), time and calories. Time and distance goals can be pre-set.


*Included with Pro-package

Treadwall® S6/11 Rotating Walls


The Treadwall S6/11 is one of our most popular models combining a full sized surface area with a relatively smaller footprint. It has a generously sized climbing surface - 6 foot (1.83 m) wide by 9 foot (2.74 m) high, that encourages sideways as well as upward movement. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop_(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The S6/11 is designed to fit under an 11 foot (3.35 m) ceiling. See the S6/10 units for lower ceilings and the S6/12 for higher ceilings.

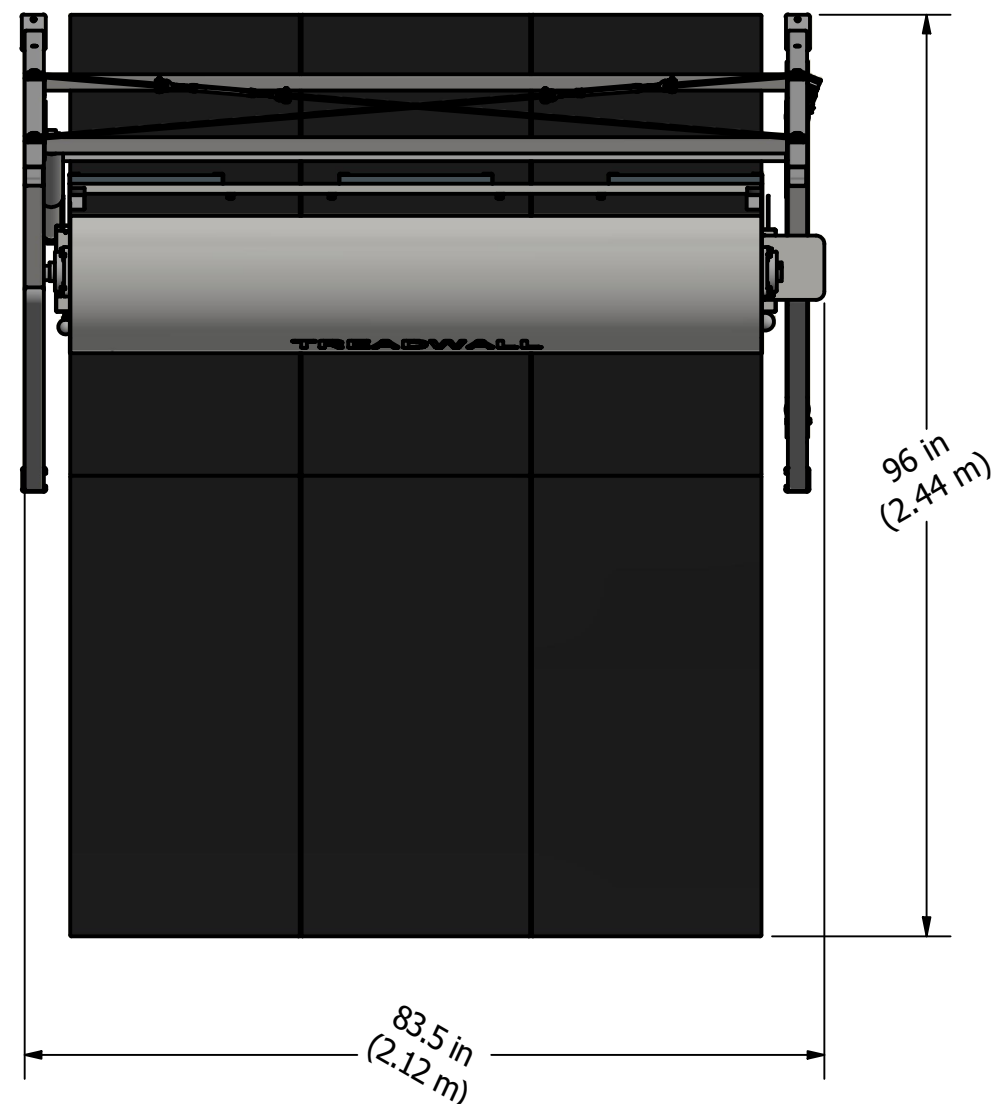


Top View

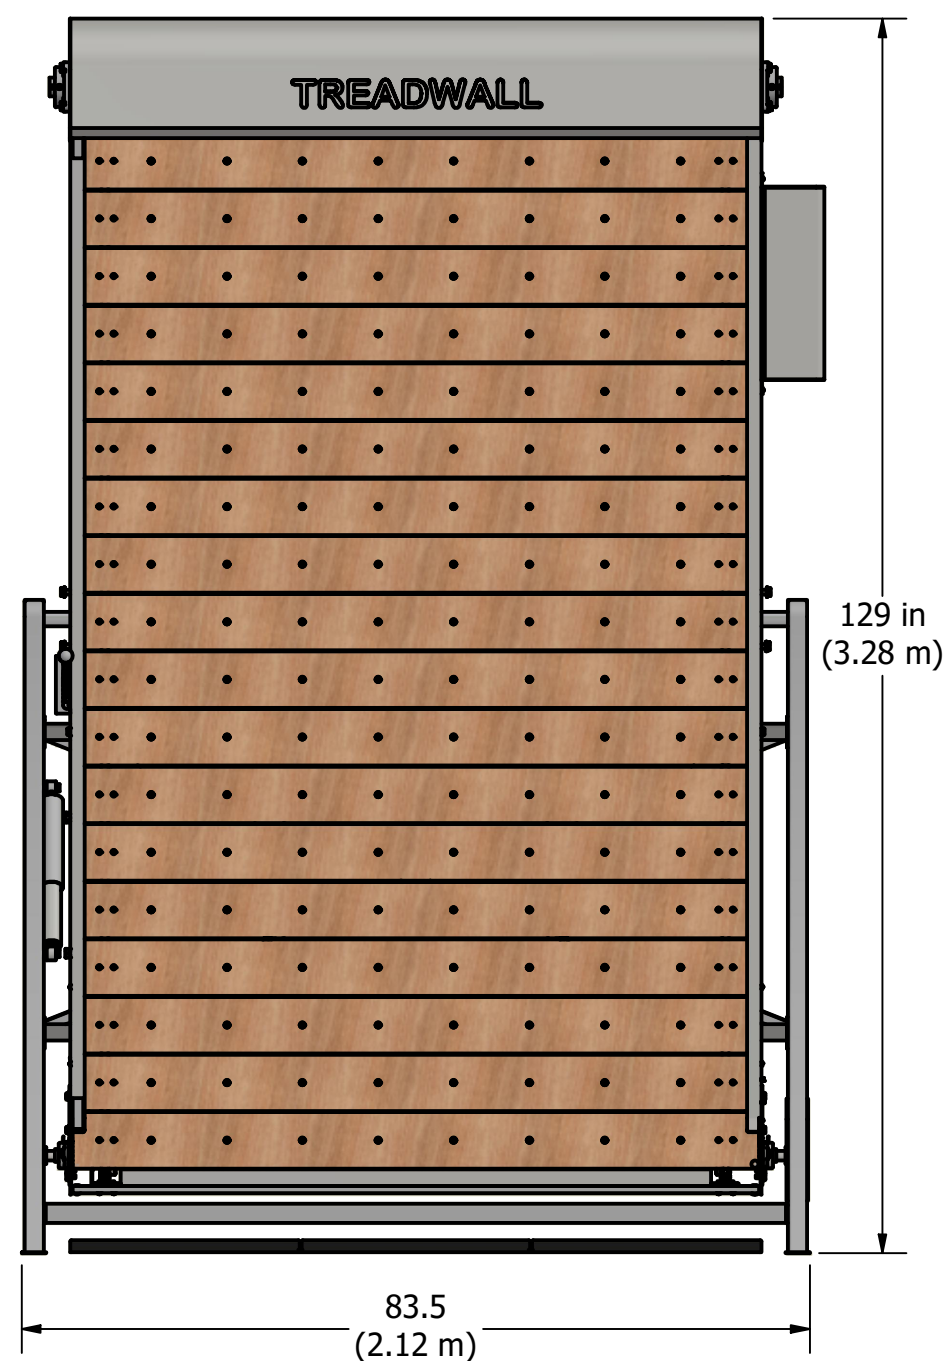

Front View

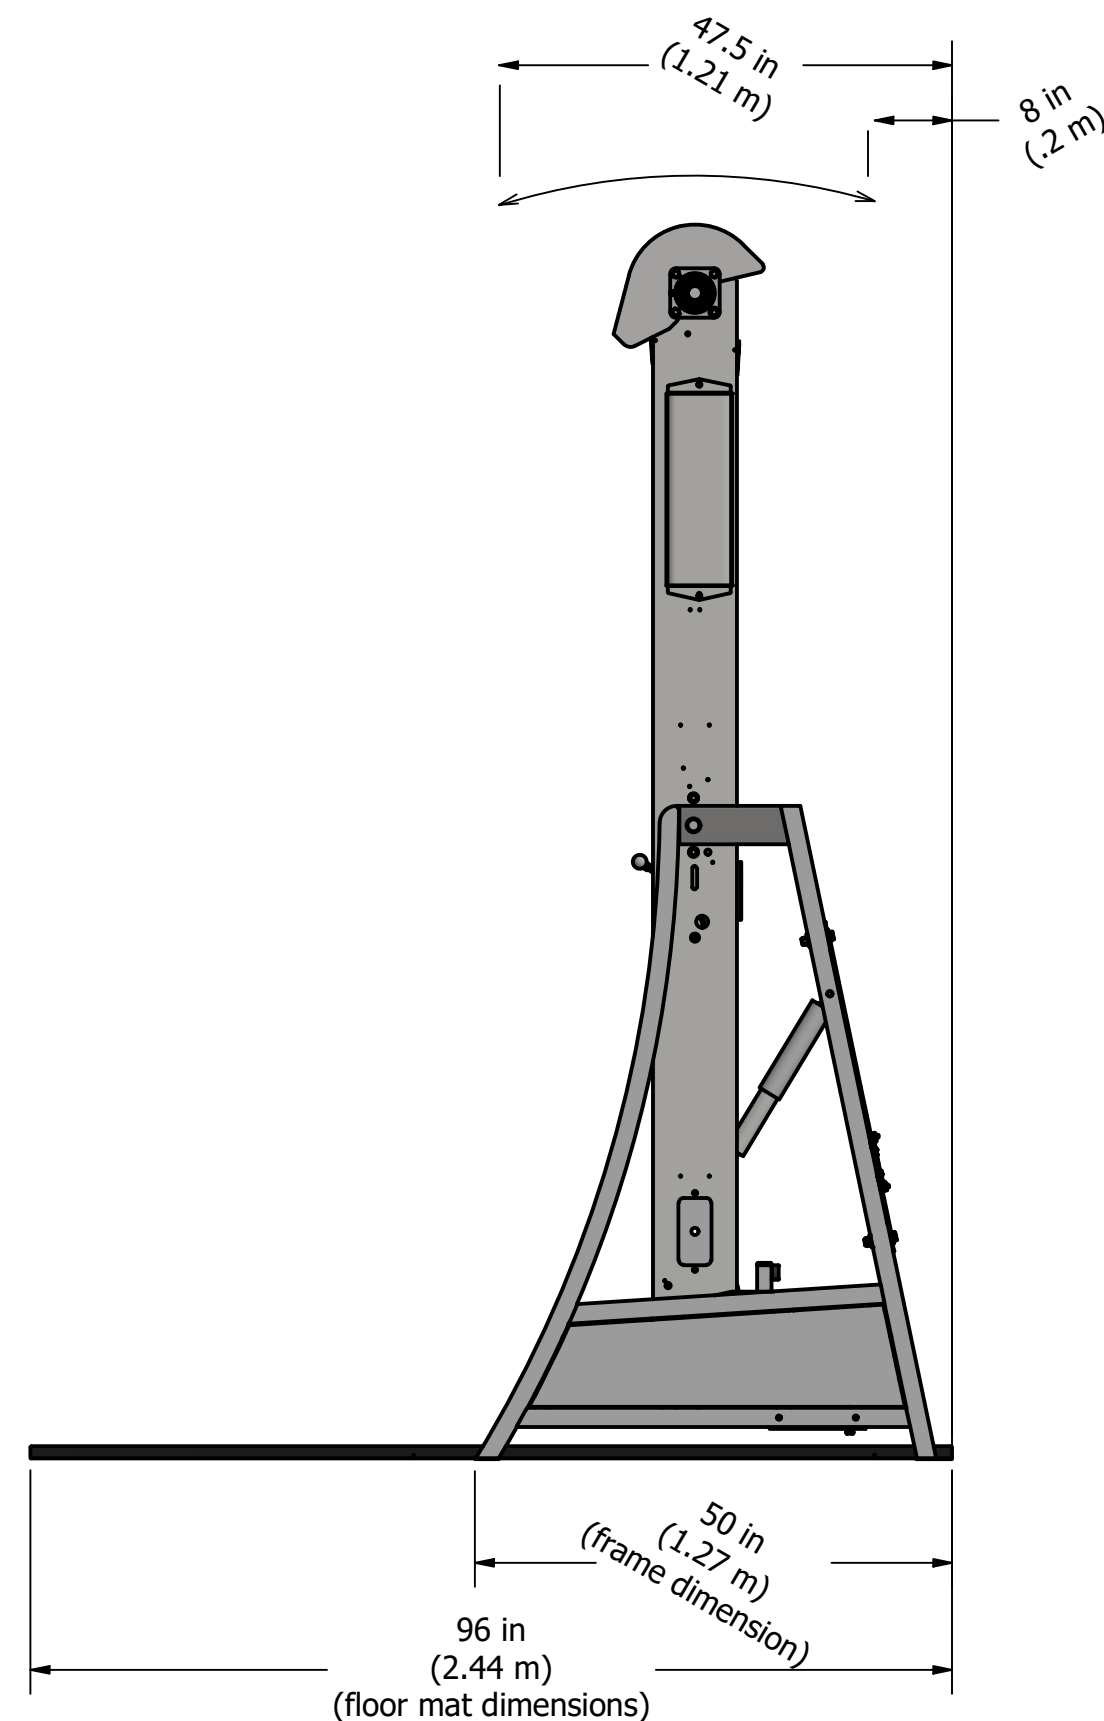

Side View

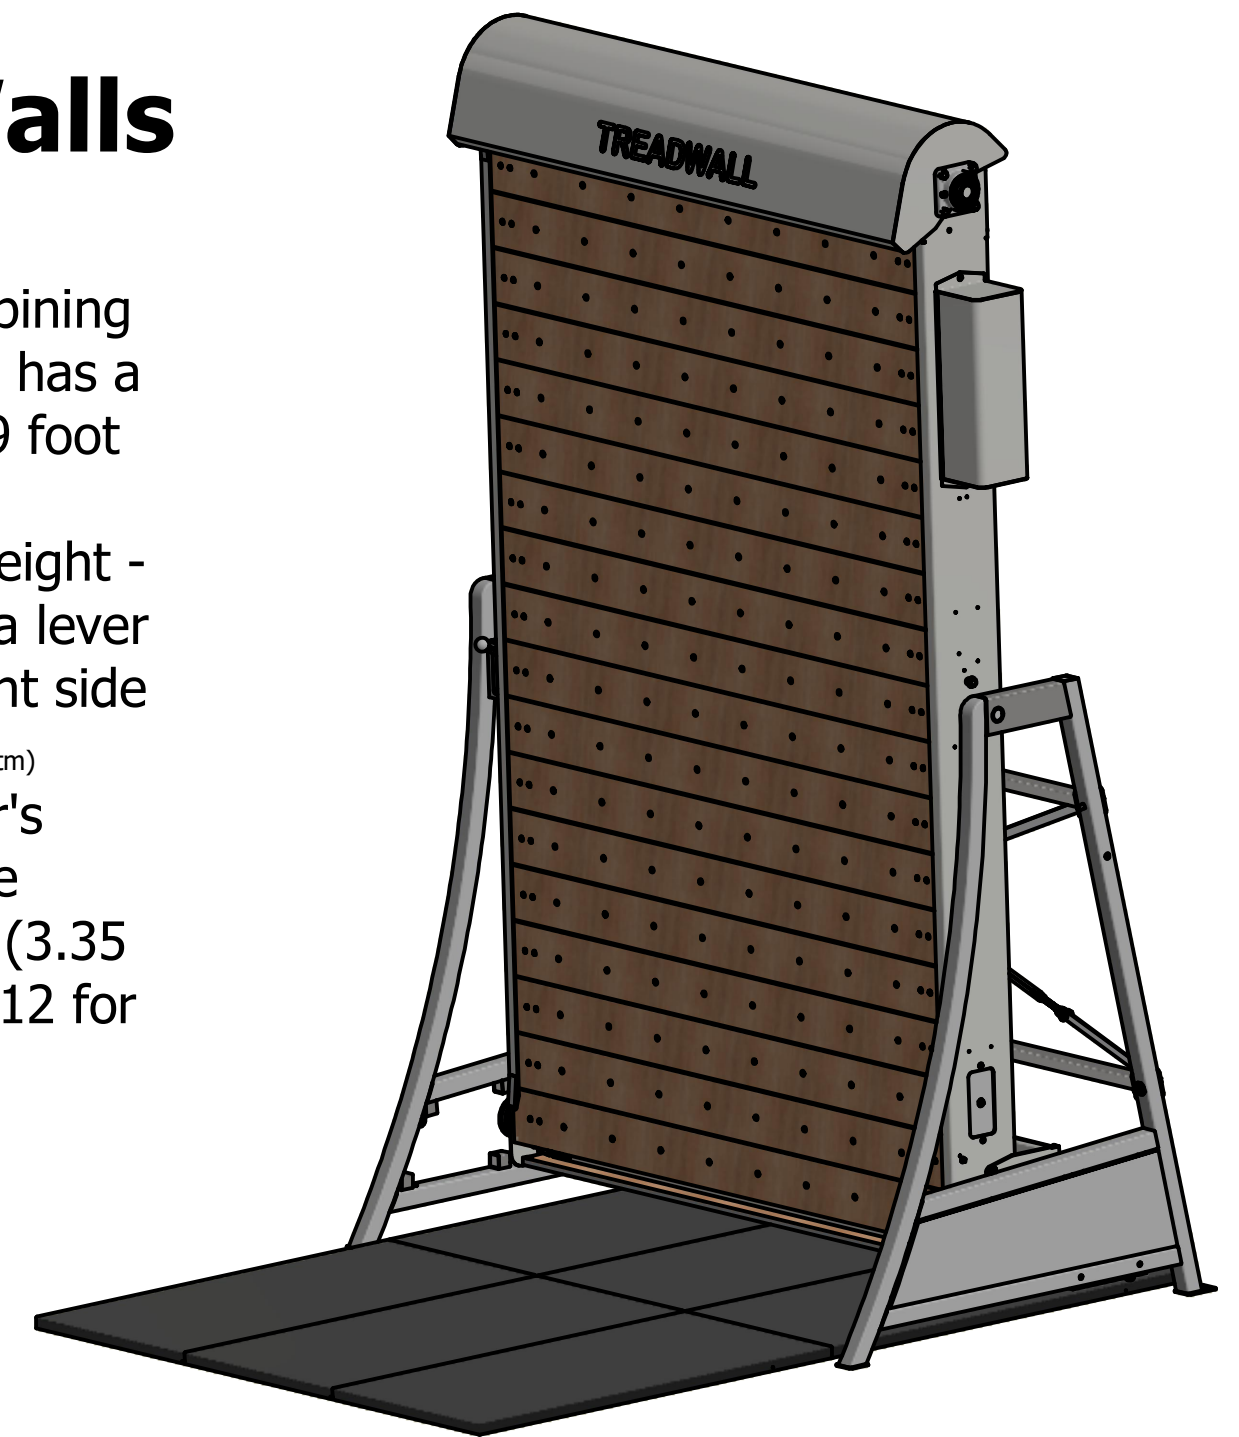

SPECIFICATIONS:

Weight: 1207 pounds (548 Kg).

Construction: Steel framework with custom-machined wood panels.

Frame color: Anthracite Gray is standard.

Panel color: Natural Wood.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 6 feet (1.83 m).

Total length of climbing surface: 20 feet (6.1 m).

Number of possible hold placements: 320.

Maximum hold size: 2.5 inches (63.5 mm) high by 6 inches (152 mm) wide.

Angle range: positive 10 degrees to negative 15 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Warranty: Six years parts, one year electronics and labor. See full warranty for details.

OPTIONS:

Exterior upgrade: Frame is galvanized and wood panels are coated with an exterior grade coating.

Custom color: Custom frame colors are available, contact us for your color

Holds*: Set of 45 custom training holds in 3 color groups.


Training rungs: 14 ladder Line_(tm) wood rungs.

Floor Mat*: 8 feet (2.44 m) x 6 feet (1.83 m) custom mat, 1.25 inches (31.75 mm) dual foam, black 14 oz. vinyl cover.


Electronic Display*: Measures distance (feet or meters), time and calories. Time and distance goals can be pre-set.

*Included with Pro-package


Treadwall® S6/12 Rotating Walls

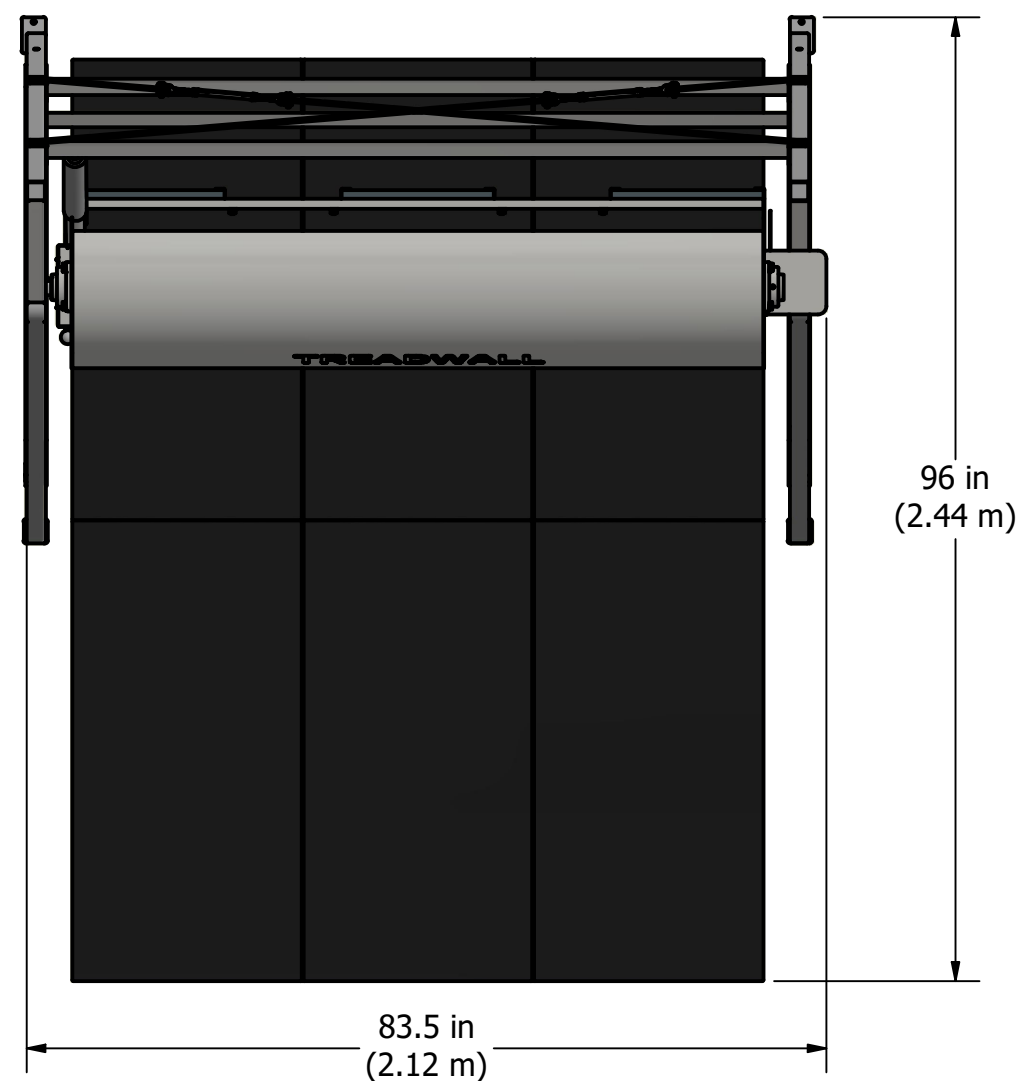

Top View

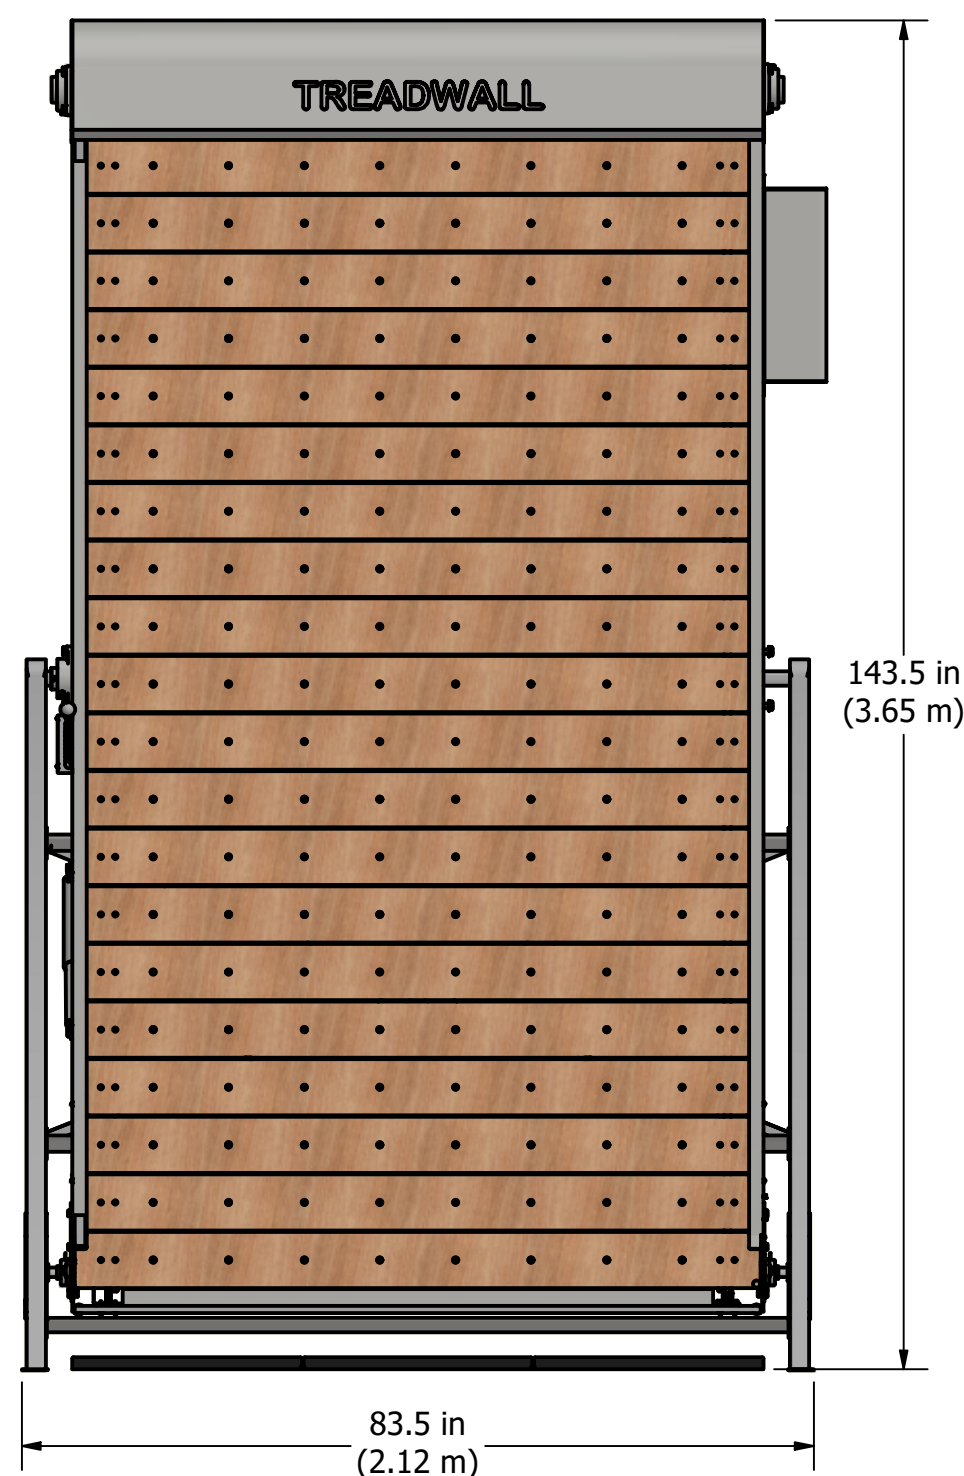


Front View

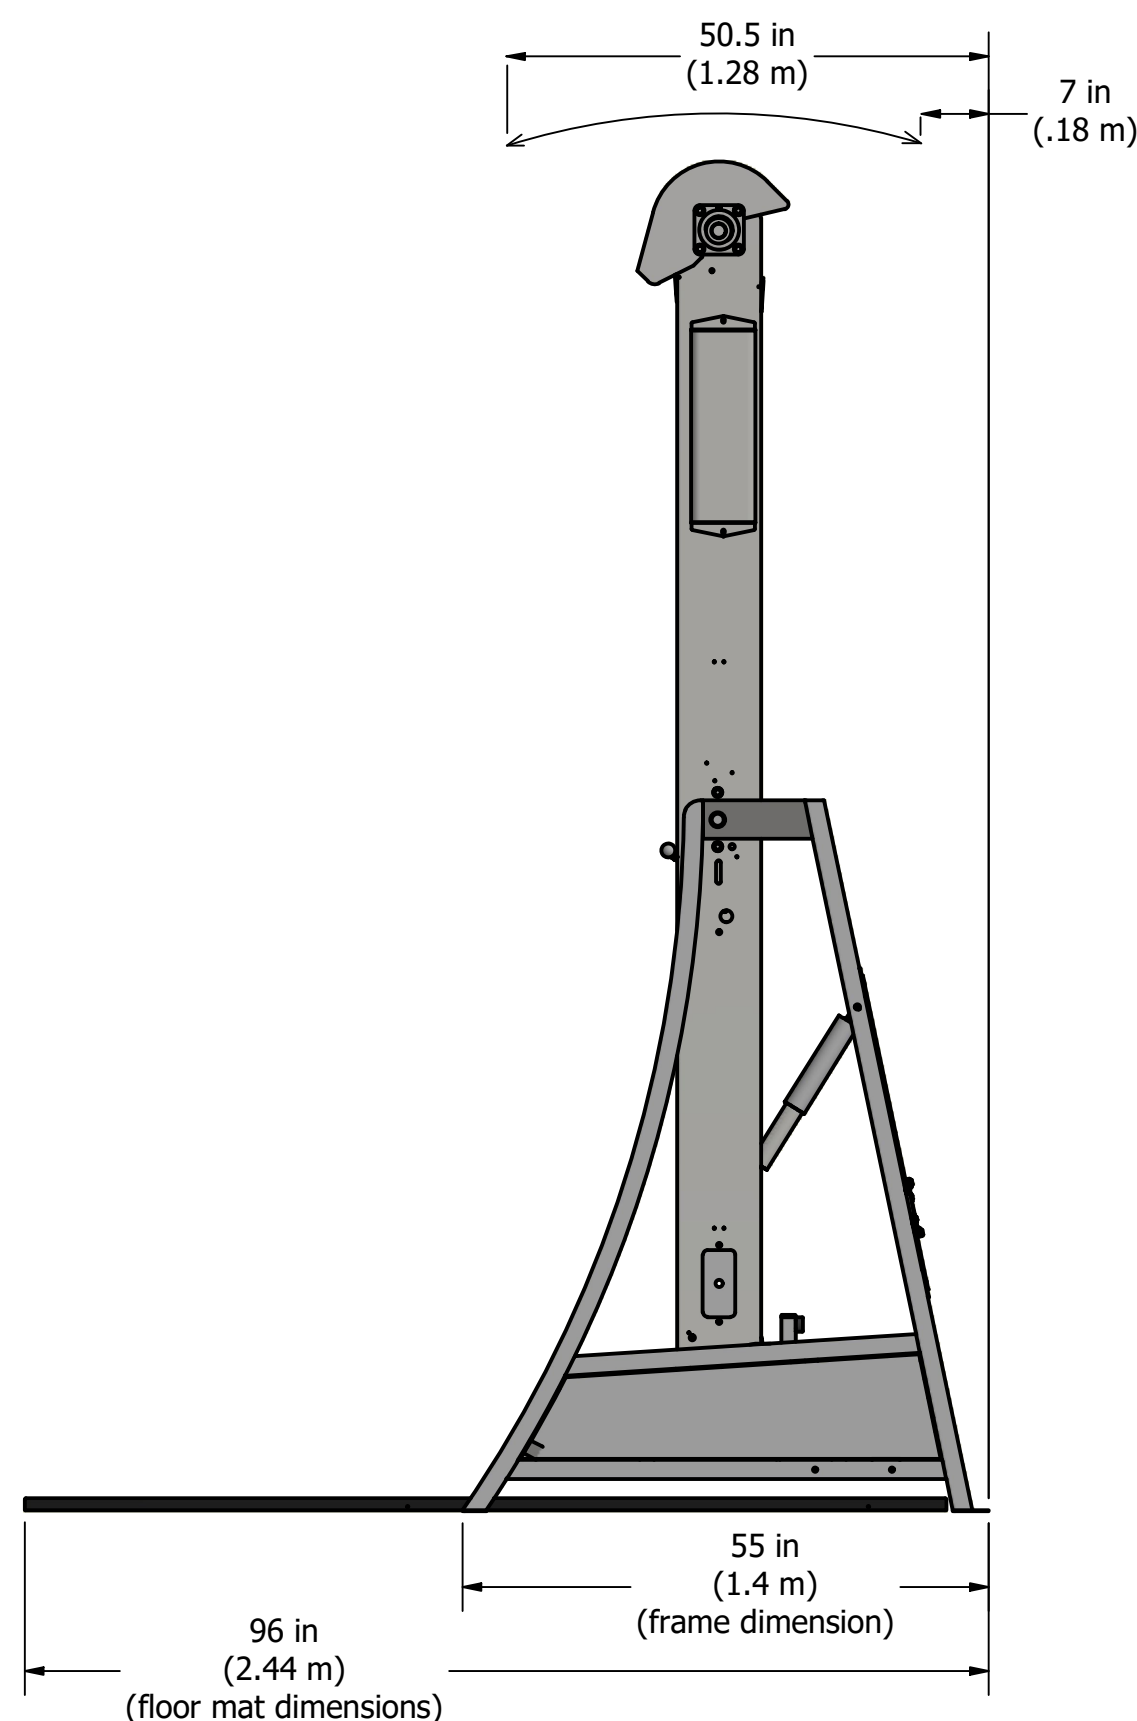

Side View

The Treadwall S6/12 combines a our largest climbing area with a relatively smaller footprint designed specifically for fitness and training facilities. It has a generously sized climbing surface - 6 foot (1.83 m) wide by 10 foot (3.1 m) high that encourages sideways as well as upward movement. The wall's rotation is powered by the climber's weight - no motors are used. The angle of the surface is adjusted by a lever mounted on the left side. A second lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop_(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The S6/12 is designed to fit under a 12 foot (3.66 m) ceiling. See the S6/10 and S6/11 units for lower ceilings.

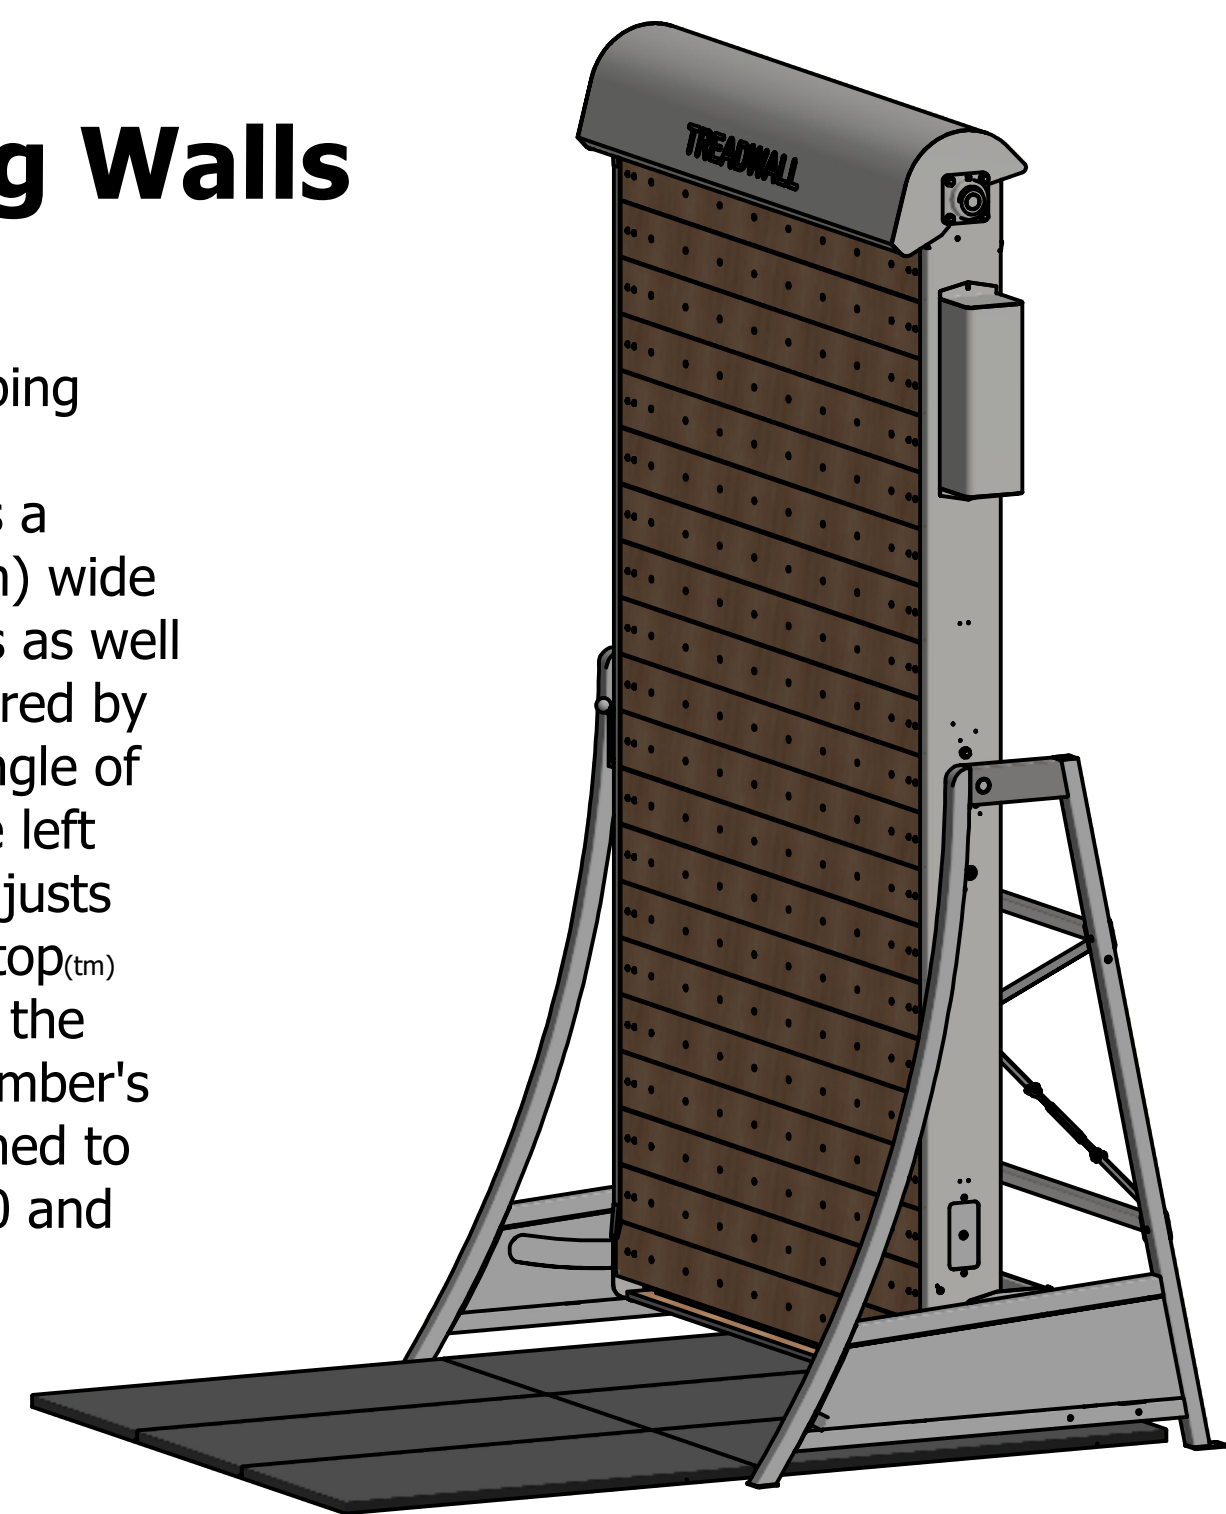

SPECIFICATIONS:

Weight: 1253 pounds (568 Kg).

Construction: Steel framework with custom-machined wood panels.

Frame color: Anthracite Gray is standard.

Panel color: Natural Wood.

Placement: Inside standard - outside with exterior upgrade.

Width of climbing surface: 6 feet (1.83 m).

Total length of climbing surface: 22 feet (6.71 m).

Number of possible hold placements: 352.

Maximum hold size: 2.5 inches (63.5 mm) high by 6 inches (152 mm) wide.

Angle range: positive 10 degrees to negative 15 degrees (overhanging).

Mode of control: Electro-hydraulic braking and resistance.

Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used.

Warranty: Six years parts, one year electronics and labor. See full warranty for details.

OPTIONS:

Exterior upgrade: Frame is galvanized and wood panels are coated with an exterior grade coating.

Custom color: Custom frame colors are available, contact us for your color

Holds*: Set of 45 custom training holds in 3 color groups.

Training rungs: 14 ladder Line_(tm) wood rungs.

Floor Mat*: 8 feet (2.44 m) x 6 feet (1.83 m) custom mat, 1.25 inches (31.75 mm) dual foam, black 14 oz. vinyl cover.

Electronic Display*: Measures distance (feet or meters), time and calories. Time and distance goals can be pre-set.

*Included with Pro-package