


# **Treadwall**<sup>®</sup> Kore4/10 Rotating Walls

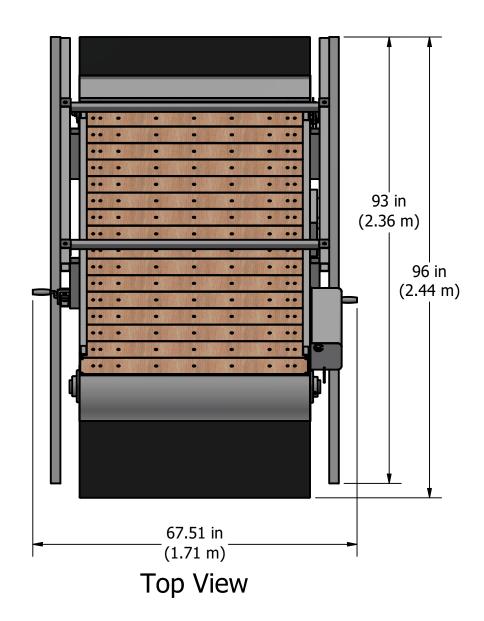

The Treadwall Kore4/10 is designed solely for residential, climbing focused use. It has a carefully sized climbing surface - 4 foot (1.22 m) wide by 8 foot (2.44 m) high that allows hard training within a small footprint. The wall's rotation is powered by the climber's weight - no motors are used. The wall angle is adjusted using the hand crank system, which allows on-going adjustments through three broad ranges. A lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The Kore4/10 is designed to fit under a 10 foot (3.1 m) ceiling. See the Kore4/11 for higher ceilings. There is no Kore4/12 option.

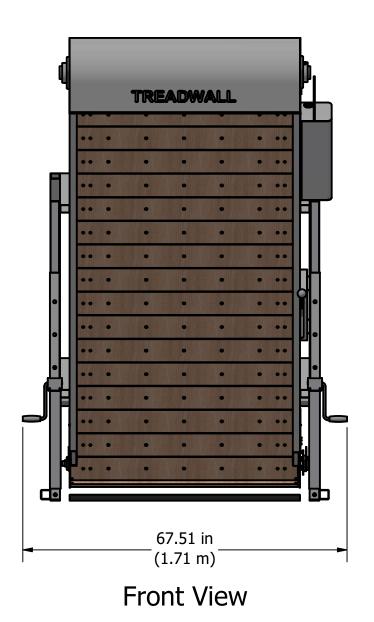

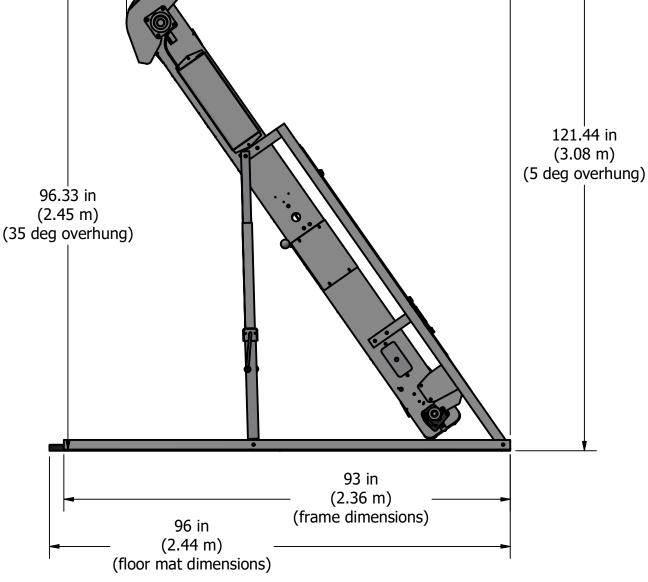

80 in

(2.03 m)

Side View



#### **SPECIFICATIONS:**

Weight: 1055 pounds (479 Kg). **Construction**: Steel framework with custom-machined wood panels. **Frame color**: Anthracite Gray is standard. Panel color: Natural Wood. **Placement**: Inside standard - outside with exterior upgrade. Width of climbing surface: 4 feet (1.22 m). **Total length of climbing surface**: 18 feet (5.49 m). Number of possible hold placements: 180. Maximum hold size: 2.5 inches (63.5 mm) high by 6 inches (152 mm) wide. **Angle range**: negative 5 degrees to negative 35 degrees (overhanging). Mode of control: Electro-hydraulic braking and resistance. Electrical requirements: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used. Warranty: Two years parts. See full warranty for details.

### **OPTIONS:**

**Exterior upgrade**: Frame is galvanized and wood panels are coated with an exterior grade coating.

**Custom color**: Custom frame colors are available, contact us for your color

Holds\*: Set of 36 custom training holds in 3 color groups.

Training rungs: 13 ladder Line(tm) wood rungs.


Floor Mat\*: 8 feet (2.44 m) x 4 feet (1.22 m) custom mat, 1.25 inches (31.75 mm) dual foam, black 14 oz. vinyl cover.

**Electronic Display\***: Measures distance (feet or meters), time and calories. Time and distance goals can be pre-set.


\*Included with Pro-package


Angle	Kore 10 (in)	Kore 10 (m)	Kore 11 (in)	Kore 11 (m)
5°	121.44	3.08	132	3.35
10°	117	2.97	130	3.3
15°	114.5	2.91	126.5	3.21
20°	111	2.82	122.5	3.11
25°	106.5	2.71	117.5	2.98
30°	102	2.59	113.5	2.88
35°	96.33	2.45	106	2.69

## **Treadwall® Kore4/11 Rotating Walls**

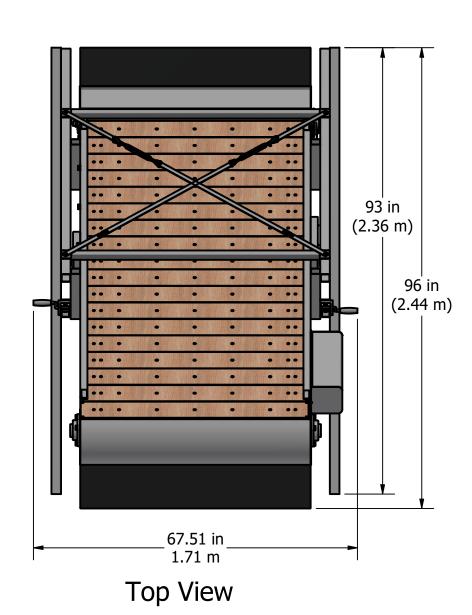


The Treadwall Kore4/11 is designed solely for residential, climbing focused use. It has a carefully sized climbing surface - 4 foot (1.22 m) wide by 9 foot (2.75 m) high that allows hard training with a small footprint. The wall's rotation is powered by the climber's weight - no motors are used. The wall angle is adjusted using the hand crank system, which allows on-going adjustments through three broad ranges. A lever mounted on the right side adjusts the speed to suit the user, and a patented auto-stop(tm) mechanism matches the movement of the wall to the climber's movements, gently braking when the climber's feet are at the bottom panel. The Kore4/11 is designed to fit under a 10 foot (3.1 m) ceiling. See the Kore4/11for higher ceilings. There is no Kore4/12 option.

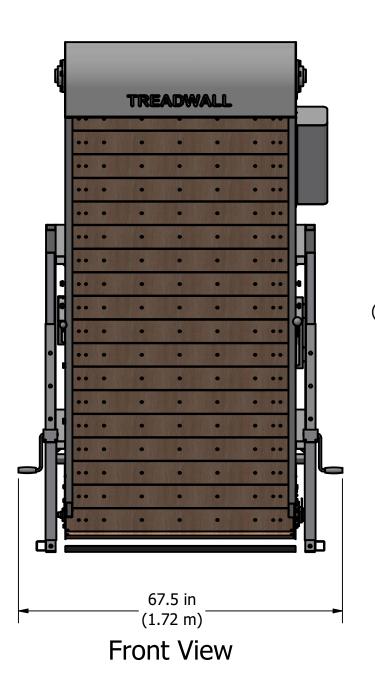

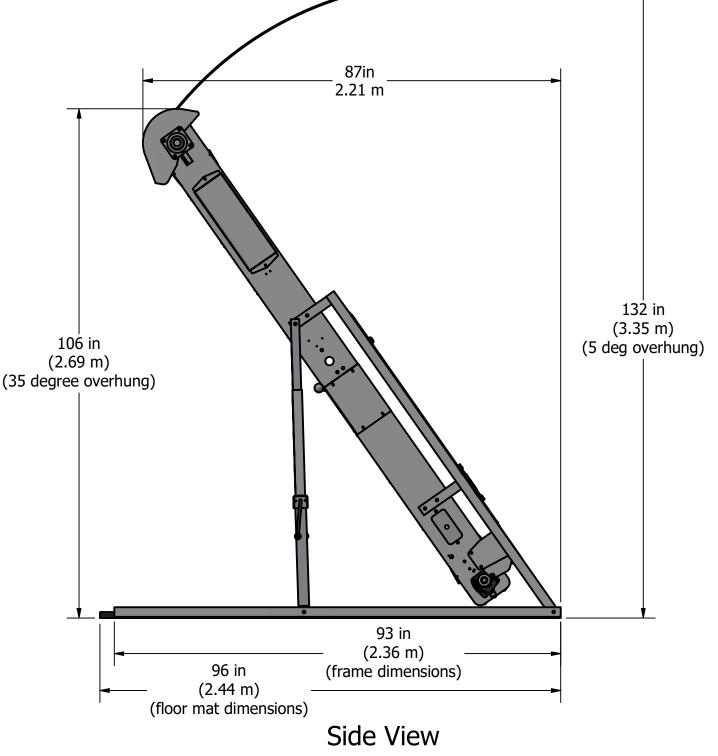

Rev. 6.16.2021 Copyright 2019 - BREWER'S LEDGE INC. 781-961-5200 www.brewerfitness.com

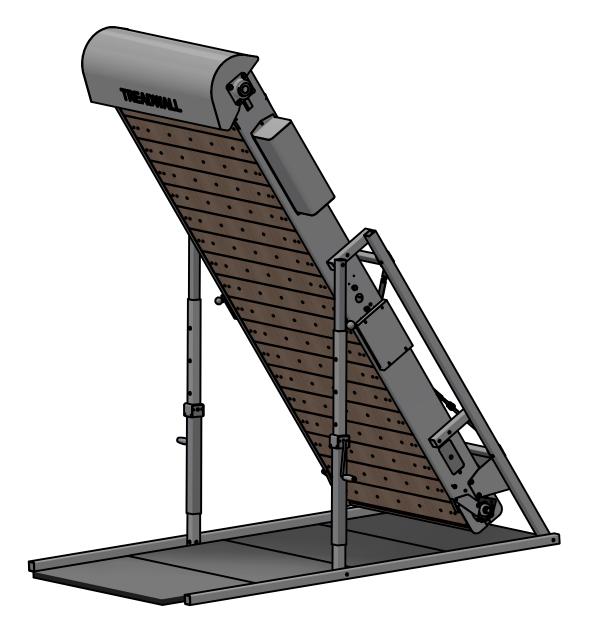

### **SPECIFICATIONS:**

- Weight: 1065 pounds (483 Kg).
- **Construction**: Steel framework with custom-machined wood panels.
- Frame color: Anthracite Gray is standard.
- Panel color: Natural Wood.
- **Placement**: Inside standard outside with exterior upgrade.
- Width of climbing surface: 4 feet (1.22 m).
- Total length of climbing surface: 18 feet (5.49 m).
- Number of possible hold placements: 180.
- Maximum hold size: 2.5 inches (63.5 mm) high by 6 inches (152 mm) wide.
- Angle range: negative 5 degrees to negative 35 degrees (overhanging).
- Mode of control: Electro-hydraulic braking and resistance.
- **Electrical requirements**: 9 VDC (1500ma) Plug-in transformer (supplied) or battery used. **Warranty**: Two years parts. See full warranty for details.

### **OPTIONS:**

**Exterior upgrade**: Frame is galvanized and wood panels are coated with an exterior grade coating.

**Custom color**: Custom frame colors are available, contact us for your color **Holds**\*: Set of 36 custom training holds in 3 color groups.

**Training rungs**: 13 ladder Line(tm) wood rungs.

**Floor Mat\***: 8 feet (2.44 m) x 4 feet (1.22 m) custom mat, 1.25 inches (31.75 mm) dual foam, black 14 oz. vinyl cover.

**Electronic Display\***: Measures distance (feet or meters), time and calories. Time and distance goals can be pre-set.

\*Included with Pro-package

Angle	Kore 10 (in)	Kore 10 (m)	Kore 11 (in)	Kore 11 (m)
5°	121.44	3.08	132	3.35
10°	117	2.97	130	3.3
15°	114.5	2.91	126.5	3.21
20°	111	2.82	122.5	3.11
25°	106.5	2.71	117.5	2.98
30°	102	2.59	113.5	2.88
35°	96.33	2.45	106	2.69